



Power contactor, AC-3 400 A, 200 kW / 400 V without coil Auxiliary contacts 2 NO + 2 NC 3-pole, Size S12 Main conductor: Busbar connections Drive: conventional Auxiliary conductor: Screw terminals

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT1
General technical data	
size of contactor	S12
product extension	
• function module for communication	No
• auxiliary switch	Yes
power loss [W] for rated value of the current at AC in hot operating state	105 W
• per pole	35 W
surge voltage resistance	
• of main circuit rated value	8 kV
• of auxiliary circuit rated value	6 kV
maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
• at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (switching cycles)	
• of contactor typical	10 000 000
• of the contactor with added electronically optimized auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	01.05.2012 00:00:00
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
• ambient temperature during operation	-25 ... +60 °C
• ambient temperature during storage	-55 ... +80 °C
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
• operating voltage at AC-3 rated value maximum	1 000 V

operational current	
<ul style="list-style-type: none"> • at AC-1 at 400 V at ambient temperature 40 °C rated value 	430 A
<ul style="list-style-type: none"> • at AC-1 <ul style="list-style-type: none"> — up to 690 V at ambient temperature 40 °C rated value 	430 A
<ul style="list-style-type: none"> — up to 690 V at ambient temperature 60 °C rated value 	400 A
<ul style="list-style-type: none"> — up to 1000 V at ambient temperature 40 °C rated value 	200 A
<ul style="list-style-type: none"> — up to 1000 V at ambient temperature 60 °C rated value 	200 A
<ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 400 V rated value 	400 A
<ul style="list-style-type: none"> — at 500 V rated value 	400 A
<ul style="list-style-type: none"> — at 690 V rated value 	400 A
<ul style="list-style-type: none"> — at 1000 V rated value 	180 A
<ul style="list-style-type: none"> • at AC-4 at 400 V rated value 	350 A
<ul style="list-style-type: none"> • at AC-5a up to 690 V rated value 	378 A
<ul style="list-style-type: none"> • at AC-5b up to 400 V rated value 	332 A
<ul style="list-style-type: none"> • at AC-6a <ul style="list-style-type: none"> — up to 230 V for current peak value n=20 rated value 	395 A
<ul style="list-style-type: none"> — up to 400 V for current peak value n=20 rated value 	395 A
<ul style="list-style-type: none"> — up to 500 V for current peak value n=20 rated value 	395 A
<ul style="list-style-type: none"> — up to 690 V for current peak value n=20 rated value 	395 A
<ul style="list-style-type: none"> — up to 1000 V for current peak value n=20 rated value 	180 A
<ul style="list-style-type: none"> • at AC-6a <ul style="list-style-type: none"> — up to 230 V for current peak value n=30 rated value 	264 A
<ul style="list-style-type: none"> — up to 400 V for current peak value n=30 rated value 	264 A
<ul style="list-style-type: none"> — up to 500 V for current peak value n=30 rated value 	264 A
<ul style="list-style-type: none"> — up to 690 V for current peak value n=30 rated value 	264 A
<ul style="list-style-type: none"> — up to 1000 V for current peak value n=30 rated value 	180 A
minimum cross-section in main circuit at maximum AC-1 rated value	300 mm ²
operational current for approx. 200000 operating cycles at AC-4	
<ul style="list-style-type: none"> • at 400 V rated value 	150 A
<ul style="list-style-type: none"> • at 690 V rated value 	135 A
operational current	
<ul style="list-style-type: none"> • at 1 current path at DC-1 <ul style="list-style-type: none"> — at 24 V rated value 	400 A
<ul style="list-style-type: none"> — at 110 V rated value 	33 A
<ul style="list-style-type: none"> — at 220 V rated value 	3.8 A
<ul style="list-style-type: none"> — at 440 V rated value 	0.9 A
<ul style="list-style-type: none"> — at 600 V rated value 	0.6 A
<ul style="list-style-type: none"> • with 2 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value 	400 A
<ul style="list-style-type: none"> — at 110 V rated value 	400 A
<ul style="list-style-type: none"> — at 220 V rated value 	400 A
<ul style="list-style-type: none"> — at 440 V rated value 	4 A
<ul style="list-style-type: none"> — at 600 V rated value 	2 A
<ul style="list-style-type: none"> • with 3 current paths in series at DC-1 	

— at 24 V rated value	400 A
— at 110 V rated value	400 A
— at 220 V rated value	400 A
— at 440 V rated value	11 A
— at 600 V rated value	5.2 A
operational current	
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	400 A
— at 110 V rated value	3 A
— at 220 V rated value	0.6 A
— at 440 V rated value	0.18 A
— at 600 V rated value	0.125 A
• with 2 current paths in series at DC-3 at DC-5	
— at 24 V rated value	400 A
— at 110 V rated value	400 A
— at 220 V rated value	2.5 A
— at 440 V rated value	0.65 A
— at 600 V rated value	0.37 A
• with 3 current paths in series at DC-3 at DC-5	
— at 24 V rated value	400 A
— at 110 V rated value	400 A
— at 220 V rated value	400 A
— at 440 V rated value	1.4 A
— at 600 V rated value	0.75 A
operating power	
• at AC-3	
— at 230 V rated value	132 kW
— at 400 V rated value	200 kW
— at 500 V rated value	250 kW
— at 690 V rated value	400 kW
— at 1000 V rated value	250 kW
operating power for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	85 kW
• at 690 V rated value	133 kW
operating apparent power at AC-6a	
• up to 230 V for current peak value n=20 rated value	150 000 kV·A
• up to 400 V for current peak value n=20 rated value	270 000 V·A
• up to 500 V for current peak value n=20 rated value	340 000 V·A
• up to 690 V for current peak value n=20 rated value	470 000 V·A
• up to 1000 V for current peak value n=20 rated value	310 000 V·A
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	100 000 V·A
• up to 400 V for current peak value n=30 rated value	180 000 V·A
• up to 500 V for current peak value n=30 rated value	220 000 V·A
• up to 690 V for current peak value n=30 rated value	310 000 V·A
• up to 1000 V for current peak value n=30 rated value	310 000 V·A
short-time withstand current in cold operating state up to 40 °C	
• limited to 1 s switching at zero current maximum	6 600 A; Use minimum cross-section acc. to AC-1 rated value
• limited to 5 s switching at zero current maximum	5 761 A; Use minimum cross-section acc. to AC-1 rated value
• limited to 10 s switching at zero current maximum	4 143 A; Use minimum cross-section acc. to AC-1 rated value
• limited to 30 s switching at zero current maximum	2 635 A; Use minimum cross-section acc. to AC-1 rated value
• limited to 60 s switching at zero current maximum	2 088 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	2 000 1/h
• at DC	2 000 1/h

operating frequency	
• at AC-1 maximum	700 1/h
• at AC-2 maximum	200 1/h
• at AC-3 maximum	500 1/h
• at AC-4 maximum	130 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
closing delay	
• at AC	45 ... 100 ms
• at DC	45 ... 100 ms
opening delay	
• at AC	60 ... 100 ms
• at DC	60 ... 100 ms
arcing time	10 ... 15 ms
control version of the switch operating mechanism	Without operating mechanism
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	2
number of NO contacts for auxiliary contacts instantaneous contact	2
operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1 A
operational current at DC-12	
• at 24 V rated value	10 A
• at 48 V rated value	6 A
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
• at 220 V rated value	1 A
• at 600 V rated value	0.15 A
operational current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	2 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	361 A
• at 600 V rated value	382 A
yielded mechanical performance [hp]	
• for 3-phase AC motor	
— at 200/208 V rated value	125 hp
— at 220/230 V rated value	150 hp
— at 460/480 V rated value	300 hp
— at 575/600 V rated value	400 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
• for short-circuit protection of the main circuit	
— with type of coordination 1 required	gG: 630 A (690 V, 100 kA)

— with type of assignment 2 required	gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA)
● for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
● side-by-side mounting	Yes
height	214 mm
width	160 mm
depth	225 mm
required spacing	
● with side-by-side mounting	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
● for grounded parts	
— forwards	20 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
● for live parts	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
Connections/ Terminals	
width of connection bar	25 mm
thickness of connection bar	6 mm
diameter of holes	11 mm
number of holes	1
type of electrical connection	
● for main current circuit	Connection bar
● for auxiliary and control circuit	screw-type terminals
● at contactor for auxiliary contacts	Screw-type terminals
● of magnet coil	Screw-type terminals
type of connectable conductor cross-sections	
● at AWG cables for main contacts	2/0 ... 500 kcmil
connectable conductor cross-section for main contacts	
● stranded	70 ... 240 mm²
connectable conductor cross-section for auxiliary contacts	
● solid or stranded	0.5 ... 4 mm²
● finely stranded with core end processing	0.5 ... 2.5 mm²
type of connectable conductor cross-sections	
● for auxiliary contacts	
— solid	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)
— solid or stranded	2x (0,5 ... 1,5 mm²), 2x (0,75 ... 2,5 mm²), max. 2x (0,75 ... 4 mm²)
— finely stranded with core end processing	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
● at AWG cables for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14), 1x 12
● AWG number as coded connectable conductor cross section for auxiliary contacts	18 ... 14
Safety related data	
B10 value with high demand rate acc. to SN 31920	1 000 000
product function	
● mirror contact acc. to IEC 60947-4-1	Yes

• positively driven operation acc. to IEC 60947-5-1	No
protection class IP on the front acc. to IEC 60529	IP00; IP20 with box terminal/cover
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front with box terminal/cover
suitability for use safety-related switching OFF	No

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



[Miscellaneous](#)

Declaration of Conformity	Test Certificates	Marine / Shipping	other
---------------------------	-------------------	-------------------	-------



[Type Test
Certificates/Test
Report](#)

[Special Test
Certificate](#)



[Miscellaneous](#)

other	Railway
-------	---------

[Confirmation](#)

[Miscellaneous](#)

[Special Test
Certificate](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1075-6LA06>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1075-6LA06>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1075-6LA06>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1075-6LA06&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1075-6LA06/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1075-6LA06&objecttype=14&gridview=view1>



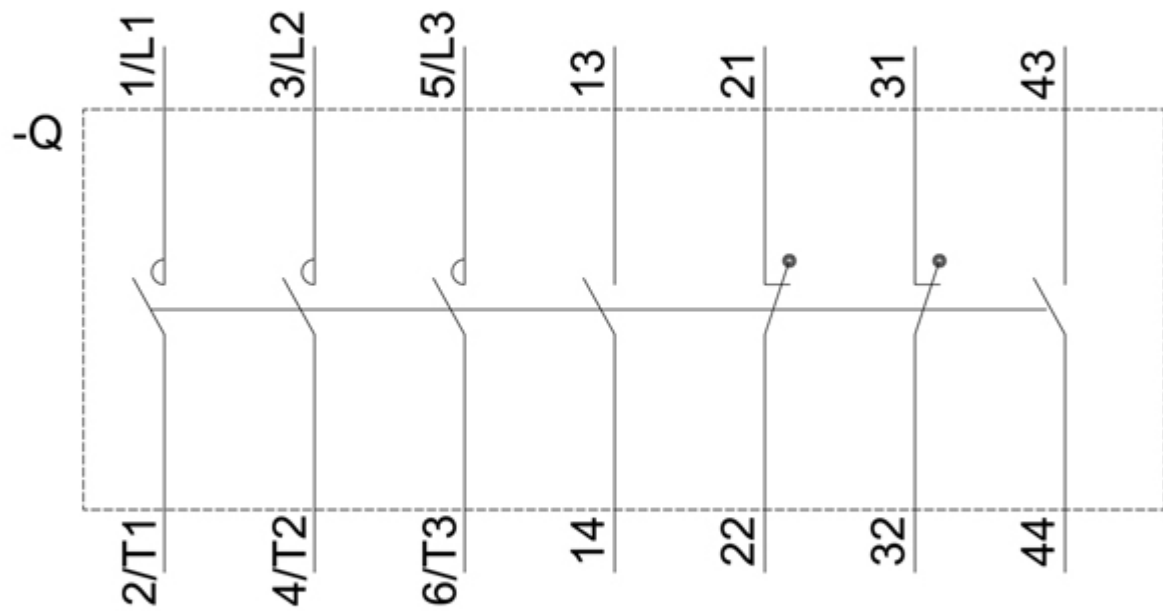

last modified:

12/18/2020 