



Power relay, AC-3 8.4 A, 4 kW / 400 V 4 NO, 230 V AC, 45...450 Hz 3 pole, screw terminal

reference code acc. to IEC 81346-2	K	
• ambient temperature during operation	-25 ... +55 °C	
number of poles	4	
number of NO contacts for main contacts	3	
number of NC contacts for main contacts	0	
type of voltage	AC	
operational current		
• at AC-1 at 400 V rated value	20 A	
• at AC-3 at 400 V rated value	8.4 A	
operating power		
• at AC-3 at 400 V rated value	4 kW	
control supply voltage at AC		
• at 50 Hz rated value	230 ... 230 V	
• at 60 Hz rated value	230 ... 230 V	
supply voltage frequency for auxiliary and control circuit rated value	45 ... 450 Hz	
number of NC contacts for auxiliary contacts	0	
number of NO contacts for auxiliary contacts	1	
number of CO contacts for auxiliary contacts	0	
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail	
• side-by-side mounting	Yes	
height	62 mm	
width	36 mm	
depth	60 mm	
type of electrical connection		
• for main current circuit	screw-type terminals	
• for auxiliary and control circuit	screw-type terminals	
protection class IP on the front acc. to IEC 60529	IP00	
General Product Approval		Declaration of Conformity



[Miscellaneous](#)



Test Certificates	other
-------------------	-------

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TG1010-0AL2>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TG1010-0AL2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TG1010-0AL2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TG1010-0AL2&lang=en


Characteristic: Tripping characteristics, I_t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3TG1010-0AL2/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TG1010-0AL2&objecttype=14&gridview=view1>

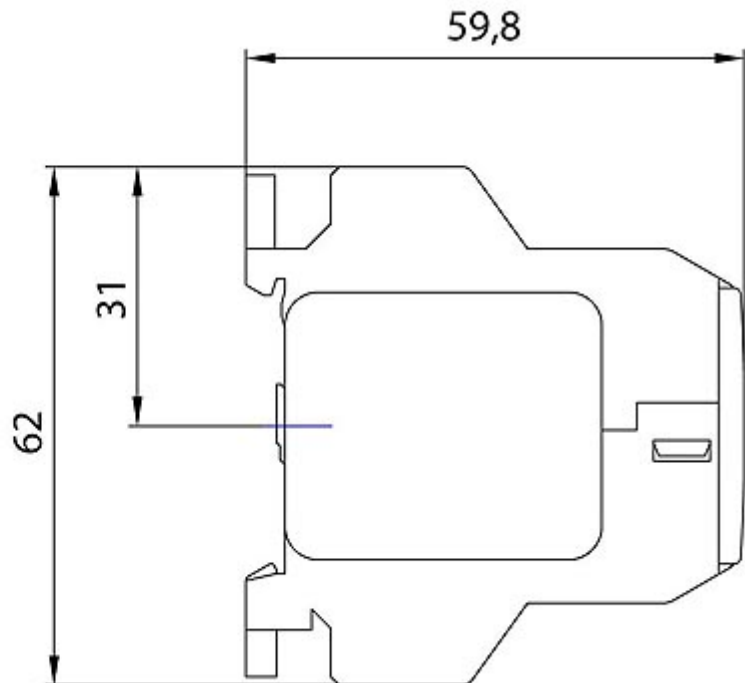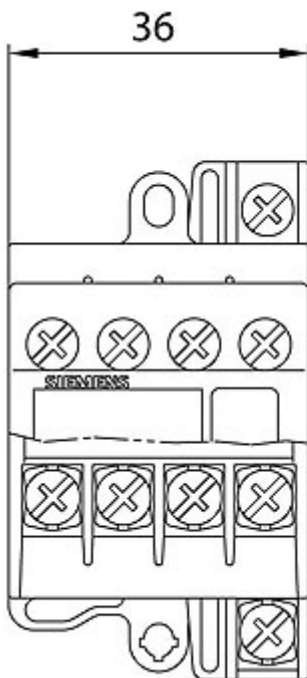

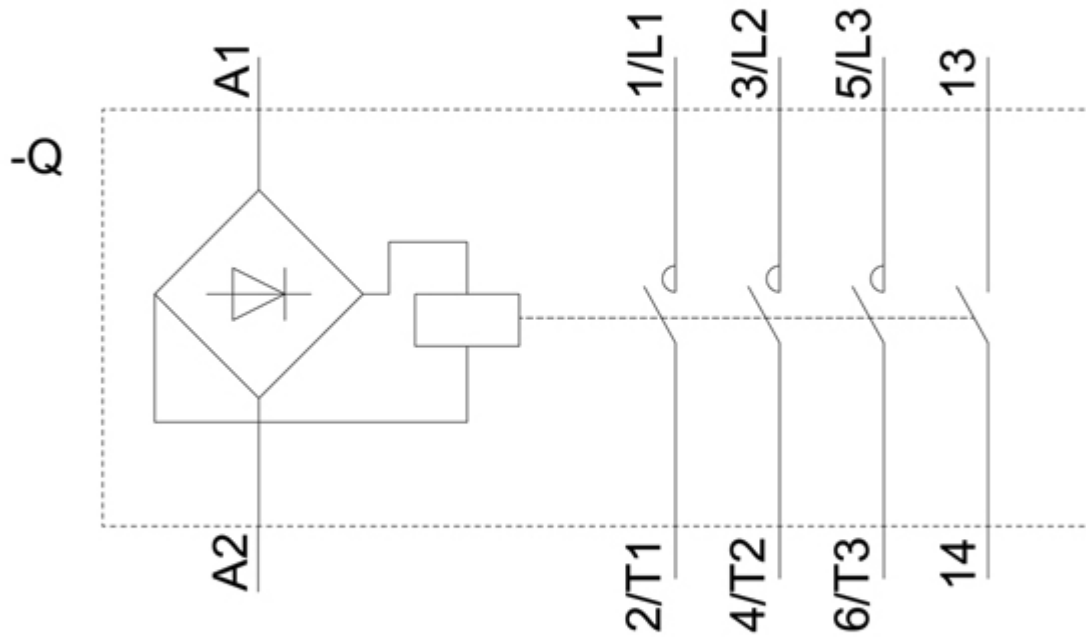

last modified:

12/3/2020 [🔗](#)