



SIRIUS soft starter 200-690 V 250 A, 110-250 V AC Screw terminals












|  |  |
|--|--|
| <b>product brand name</b>                    | SIRIUS   |
| <b>product category</b>                      | Hybrid switching devices   |
| <b>product designation</b>                   | Soft starter   |
| <b>product type designation</b>              | 3RW55  |
| <b>manufacturer's article number</b>         | <ul style="list-style-type: none"> <li>• of high feature HMI module usable</li> <li>• of communication module PROFINET standard usable</li> <li>• of communication module PROFINET high-feature usable</li> <li>• of communication module PROFIBUS usable</li> <li>• of communication module Modbus TCP usable</li> <li>• of communication module Modbus RTU usable</li> <li>• of communication module Ethernet/IP</li> <li>• of circuit breaker usable at 400 V</li> <li>• of circuit breaker usable at 500 V</li> <li>• of circuit breaker usable at 400 V at inside-delta circuit</li> <li>• of circuit breaker usable at 500 V at inside-delta circuit</li> <li>• of the gG fuse usable up to 690 V</li> <li>• of the gG fuse usable at inside-delta circuit up to 500 V</li> <li>• of full range R fuse link for semiconductor protection usable up to 690 V</li> <li>• of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul> |
| <b>General technical data</b>                | <p> <a href="#">3RW5980-0HF00</a><br/> <a href="#">3RW5980-0CS00</a><br/> <a href="#">3RW5950-0CH00</a><br/> <a href="#">3RW5980-0CP00</a><br/> <a href="#">3RW5980-0CT00</a><br/> <a href="#">3RW5980-0CR00</a><br/> <a href="#">3RW5980-0CE00</a><br/> <a href="#">3VA2440-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a><br/> <a href="#">3VA2440-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a><br/> <a href="#">3VA2450-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a><br/> <a href="#">3VA2450-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a><br/>           2x3NA3354-6; Type of coordination 1, Iq = 65 kA<br/>           2x3NA3354-6; Type of coordination 1, Iq = 65 kA<br/> <a href="#">3NE1331-0: Type of coordination 2, Iq = 65 kA</a><br/> <a href="#">3NE3335: Type of coordination 2, Iq = 65 kA</a> </p>   |
| <b>starting voltage [%]</b>                  | 20 ... 100 %   |
| <b>stopping voltage [%]</b>                  | 50 ... 50 %  |
| <b>start-up ramp time of soft starter</b>    | 0 ... 360 s  |
| <b>ramp-down time of soft starter</b>        | 0 ... 360 s  |
| <b>start torque [%]</b>                      | 10 ... 100 %   |
| <b>stopping torque [%]</b>                   | 10 ... 100 %   |
| <b>torque limitation [%]</b>                 | 20 ... 200 %   |
| <b>current limiting value [%] adjustable</b> | 125 ... 800 %  |
| <b>breakaway voltage [%] adjustable</b>      | 40 ... 100 %   |
| <b>breakaway time adjustable</b>             | 0 ... 2 s  |
| <b>number of parameter sets</b>              | 3  |

|   |   |
|---|---|
| <b>accuracy class acc. to IEC 61557-12</b>              | 5 %   |
| <b>certificate of suitability</b>                       |   |
| • CE marking  | Yes   |
| • UL approval   | Yes   |
| • CSA approval  | Yes   |
| <b>product component</b>                                |   |
| • HMI-High Feature                                      | Yes   |
| • is supported HMI-High Feature                         | Yes   |
| <b>product feature integrated bypass contact system</b> | Yes   |
| <b>number of controlled phases</b>                      | 3   |
| <b>trip class</b>                                       | CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2                                      |
| <b>current unbalance limiting value [%]</b>             | 10 ... 60 %   |
| <b>ground-fault monitoring limiting value [%]</b>       | 10 ... 95 %   |
| <b>recovery time after overload trip adjustable</b>     | 60 ... 1 800 s  |
| <b>buffering time in the event of power failure</b>     |   |
| • for main current circuit                              | 100 ms  |
| • for control circuit                                   | 100 ms  |
| <b>idle time adjustable</b>                             | 0 ... 255 s   |
| <b>insulation voltage rated value</b>                   | 690 V   |
| <b>degree of pollution</b>                              | 3, acc. to IEC 60947-4-2  |
| <b>impulse voltage rated value</b>                      | 8 kV  |
| <b>blocking voltage of the thyristor maximum</b>        | 1 800 V   |
| <b>service factor</b>                                   | 1.15  |
| <b>surge voltage resistance rated value</b>             | 8 kV  |
| <b>maximum permissible voltage for safe isolation</b>   |   |
| • between main and auxiliary circuit                    | 690 V; does not apply for thermistor connection   |
| <b>utilization category acc. to IEC 60947-4-2</b>       | AC 53a  |
| <b>shock resistance</b>                                 | 15 g / 11 ms, from 6 g / 11 ms with potential contact lifting                                     |
| <b>vibration resistance</b>                             | 15 mm up to 6 Hz; 2 g up to 500 Hz  |
| <b>reference code acc. to IEC 81346-2</b>               | Q   |
| Substance Prohibitance (Date)                           | 15.02.2018 00:00:00   |
| <b>product function</b>                                 |   |
| • ramp-up (soft starting)                               | Yes   |
| • ramp-down (soft stop)                                 | Yes   |
| • breakaway pulse                                       | Yes   |
| • adjustable current limitation                         | Yes   |
| • creep speed in both directions of rotation            | Yes   |
| • pump ramp down  | Yes   |
| • DC braking  | Yes   |
| • motor heating   | Yes   |
| • slave pointer function                                | Yes   |
| • trace function  | Yes   |
| • intrinsic device protection                           | Yes   |
| • motor overload protection                             | Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) |
| • evaluation of thermistor motor protection             | Yes; Type A PTC or Klaxon / Thermoclick   |
| • inside-delta circuit                                  | Yes; Only up to 600 V operating voltage   |
| • auto-RESET  | Yes   |
| • manual RESET  | Yes   |
| • remote reset  | Yes   |
| • communication function                                | Yes   |
| • operating measured value display                      | Yes   |
| • event list  | Yes   |
| • error logbook   | Yes   |
| • via software parameterizable                          | Yes   |
| • via software configurable                             | Yes   |
| • screw terminal  | Yes   |
| • spring-type terminal                                  | No  |
| • <b>PROFInergy</b>                                     | Yes; in connection with the PROFINET Standard and PROFINET High-                                  |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• <b>firmware update</b></li> <li>• <b>removable terminal for control circuit</b></li> <li>• voltage ramp</li> <li>• torque control</li> <li>• combined braking</li> <li>• analog output</li> <li>• programmable control inputs/outputs</li> <li>• condition monitoring</li> <li>• automatic parameterisation</li> <li>• application wizards</li> <li>• alternative run-down</li> <li>• emergency operation mode</li> <li>• reversing operation</li> <li>• soft starting at heavy starting conditions</li> </ul> | Feature communication modules<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes; 4 ... 20 mA (default) / 0 ... 10 V<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes |
| <b>Power Electronics</b>  |   |
| <b>operational current</b>  |   |
| <ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 40 °C rated value minimum</li> <li>• at 50 °C rated value</li> <li>• at 60 °C rated value</li> </ul>  | 250 A<br>50 A<br>220 A<br>200 A   |
| <b>operational current at inside-delta circuit</b>  |   |
| <ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 50 °C rated value</li> <li>• at 60 °C rated value</li> </ul>  | 433 A<br>381 A<br>346 A   |
| <b>operating voltage</b>  |   |
| <ul style="list-style-type: none"> <li>• rated value</li> <li>• at inside-delta circuit rated value</li> </ul>  | 200 ... 690 V<br>200 ... 600 V  |
| <b>relative negative tolerance of the operating voltage</b>   | -15 %   |
| <b>relative positive tolerance of the operating voltage</b>   | 10 %  |
| <b>relative negative tolerance of the operating voltage at inside-delta circuit</b>   | -15 %   |
| <b>relative positive tolerance of the operating voltage at inside-delta circuit</b>   | 10 %  |
| <b>operating power for 3-phase motors</b>   |   |
| <ul style="list-style-type: none"> <li>• at 230 V at 40 °C rated value</li> <li>• at 230 V at inside-delta circuit at 40 °C rated value</li> <li>• at 400 V at 40 °C rated value</li> <li>• at 400 V at inside-delta circuit at 40 °C rated value</li> <li>• at 500 V at 40 °C rated value</li> <li>• at 500 V at inside-delta circuit at 40 °C rated value</li> <li>• at 690 V at 40 °C rated value</li> </ul>   | 75 kW<br>132 kW<br>132 kW<br>250 kW<br>160 kW<br>315 kW<br>250 kW   |
| <b>Operating frequency 1 rated value</b>  | 50 Hz   |
| <b>Operating frequency 2 rated value</b>  | 60 Hz   |
| <b>relative negative tolerance of the operating frequency</b>   | -10 %   |
| <b>relative positive tolerance of the operating frequency</b>   | 10 %  |
| <b>minimum load [%]</b>   | 10 %; Relative to set I <sub>e</sub>  |
| <b>power loss [W] for rated value of the current at AC</b>  |   |
| <ul style="list-style-type: none"> <li>• at 40 °C after startup</li> <li>• at 50 °C after startup</li> <li>• at 60 °C after startup</li> </ul>  | 75 W<br>66 W<br>60 W  |
| <b>power loss [W] at AC at current limitation 350 %</b>   |   |
| <ul style="list-style-type: none"> <li>• at 40 °C during startup</li> <li>• at 50 °C during startup</li> <li>• at 60 °C during startup</li> </ul>   | 3 806 W<br>3 176 W<br>2 787 W   |
| <b>type of the motor protection</b>   | Electronic, tripping in the event of thermal overload of the motor  |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>  | AC  |
| <b>control supply voltage at AC</b>   |   |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>   | 110 ... 250 V  |
| <b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b>  | -15 %  |
| <b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b>  | 10 %   |
| <b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b>  | -15 %  |
| <b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b>  | 10 %   |
| <b>control supply voltage frequency</b>  | 50 ... 60 Hz   |
| <b>relative negative tolerance of the control supply voltage frequency</b>   | -10 %  |
| <b>relative positive tolerance of the control supply voltage frequency</b>   | 10 %   |
| <b>control supply current in standby mode rated value</b>  | 100 mA   |
| <b>holding current in bypass operation rated value</b>   | 150 mA   |
| <b>locked-rotor current at close of bypass contact maximum</b>   | 0.87 A   |
| <b>inrush current peak at application of control supply voltage maximum</b>  | 43 A   |
| <b>duration of inrush current peak at application of control supply voltage</b>  | 1.6 ms   |
| <b>design of the overvoltage protection</b>  | Varistor   |
| <b>design of short-circuit protection for control circuit</b>  | 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply |
| <b>Inputs/ Outputs</b>   |  |
| <b>number of digital inputs</b>  | 4  |
| <ul style="list-style-type: none"> <li>• parameterizable</li> </ul>  | 4  |
| <b>number of inputs for thermistor connection</b>  | 1; Type A PTC or Klixon / Thermoclick  |
| <ul style="list-style-type: none"> <li>• <b>number of digital outputs</b></li> <li>• number of digital outputs parameterizable</li> <li>• number of digital outputs not parameterizable</li> </ul> | 4<br>3<br>1  |
| <b>digital output version</b>  | 3 normally-open contacts (NO) / 1 changeover contact (CO)  |
| <b>number of analog outputs</b>  | 1  |
| <b>switching capacity current of the relay outputs</b>   |  |
| <ul style="list-style-type: none"> <li>• at AC-15 at 250 V rated value</li> <li>• at DC-13 at 24 V rated value</li> </ul>  | 3 A<br>1 A   |
| <b>Installation/ mounting/ dimensions</b>  |  |
| <b>mounting position</b>   | Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)   |
| <b>fastening method</b>  | screw fixing   |
| <b>height</b>  | 393 mm   |
| <b>width</b>   | 210 mm   |
| <b>depth</b>   | 203 mm   |
| <b>required spacing with side-by-side mounting</b>   |  |
| <ul style="list-style-type: none"> <li>• forwards</li> <li>• backwards</li> <li>• upwards</li> <li>• downwards</li> <li>• at the side</li> </ul>   | 10 mm<br>0 mm<br>100 mm<br>75 mm<br>5 mm   |
| <b>weight without packaging</b>  | 10.2 kg  |
| <b>Connections/ Terminals</b>  |  |
| <b>type of electrical connection</b>   |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for control circuit</li> </ul>  | busbar connection<br>screw-type terminals  |
| <b>width of connection bar maximum</b>   | 45 mm  |
| <b>wire length for thermistor connection</b>   |  |
| <ul style="list-style-type: none"> <li>• with conductor cross-section = 0.5 mm² maximum</li> <li>• with conductor cross-section = 1.5 mm² maximum</li> </ul>                                       | 50 m<br>150 m  |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>with conductor cross-section = 2.5 mm<sup>2</sup> maximum</li> </ul>  | 250 m  |
| <b>type of connectable conductor cross-sections</b>  |  |
| <ul style="list-style-type: none"> <li>for DIN cable lug for main contacts stranded</li> </ul>   | 2x (50 ... 240 mm <sup>2</sup> )   |
| <ul style="list-style-type: none"> <li>for DIN cable lug for main contacts finely stranded</li> </ul>  | 2x (70 ... 240 mm <sup>2</sup> )   |
| <b>type of connectable conductor cross-sections</b>  |  |
| <ul style="list-style-type: none"> <li>for control circuit solid</li> </ul>  | 1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )   |
| <ul style="list-style-type: none"> <li>for control circuit finely stranded with core end processing</li> </ul>   | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )   |
| <ul style="list-style-type: none"> <li>at AWG cables for control circuit solid</li> </ul>  | 1x (20 ... 12), 2x (20 ... 14)   |
| <b>wire length</b>   |  |
| <ul style="list-style-type: none"> <li>between soft starter and motor maximum</li> </ul>   | 800 m  |
| <ul style="list-style-type: none"> <li>at the digital inputs at DC maximum</li> </ul>  | 1 000 m  |
| <b>tightening torque</b>   |  |
| <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> </ul>  | 14 ... 24 N·m  |
| <ul style="list-style-type: none"> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>   | 0.8 ... 1.2 N·m  |
| <b>tightening torque [lbf·in]</b>  |  |
| <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> </ul>  | 124 ... 210 lbf·in   |
| <ul style="list-style-type: none"> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>   | 7 ... 10.3 lbf·in  |
| <b>Ambient conditions</b>  |  |
| installation altitude at height above sea level maximum  | 2 000 m; Derating as of 1000 m, see catalog  |
| <b>ambient temperature</b>   |  |
| <ul style="list-style-type: none"> <li>during operation</li> </ul>   | -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above  |
| <ul style="list-style-type: none"> <li>during storage and transport</li> </ul>   | -40 ... +80 °C   |
| <b>environmental category</b>  |  |
| <ul style="list-style-type: none"> <li>during operation acc. to IEC 60721</li> </ul>   | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6  |
| <ul style="list-style-type: none"> <li>during storage acc. to IEC 60721</li> </ul>   | 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4  |
| <ul style="list-style-type: none"> <li>during transport acc. to IEC 60721</li> </ul>   | 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)  |
| <b>EMC emitted interference</b>  | acc. to IEC 60947-4-2: Class A   |
| <b>Communication/ Protocol</b>   |  |
| <b>communication module is supported</b>   |  |
| <ul style="list-style-type: none"> <li>PROFINET standard</li> </ul>  | Yes  |
| <ul style="list-style-type: none"> <li>PROFINET high-feature</li> </ul>  | Yes  |
| <ul style="list-style-type: none"> <li>EtherNet/IP</li> </ul>  | Yes  |
| <ul style="list-style-type: none"> <li>Modbus RTU</li> </ul>   | Yes  |
| <ul style="list-style-type: none"> <li>Modbus TCP</li> </ul>   | Yes  |
| <ul style="list-style-type: none"> <li>PROFIBUS</li> </ul>   | Yes  |
| <b>UL/CSA ratings</b>  |  |
| <b>manufacturer's article number</b>   |  |
| <ul style="list-style-type: none"> <li><b>of circuit breaker</b> <ul style="list-style-type: none"> <li>— usable for Standard Faults at 460/480 V according to UL</li> </ul> </li> <li>— usable for High Faults at 460/480 V according to UL</li> <li>— usable for Standard Faults at 460/480 V at inside-delta circuit according to UL</li> <li>— usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> <li>— usable for Standard Faults at 575/600 V according to UL</li> <li>— usable for High Faults at 575/600 V at inside-delta circuit according to UL</li> <li>— usable for Standard Faults at 575/600 V at inside-delta circuit according to UL</li> </ul> | <p>Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; I<sub>q</sub> = 18 kA</p> <p>Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; I<sub>q</sub> max = 65 kA</p> <p>Siemens type: 3VA54, max. 600 A; I<sub>q</sub> = 18 kA</p> <p>Siemens type: 3VA54, max. 600 A; I<sub>q</sub> max = 65 kA</p> <p>Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; I<sub>q</sub> = 18 kA</p> <p>Siemens type: 3VA54, max. 600 A; I<sub>q</sub> max = 65 kA</p> <p>Siemens type: 3VA54, max. 600 A; I<sub>q</sub> = 18 kA</p> |
| <ul style="list-style-type: none"> <li><b>of the fuse</b> <ul style="list-style-type: none"> <li>— usable for Standard Faults up to 575/600 V according to UL</li> </ul> </li> </ul>   | Type: Class J / L, max. 800 A; I <sub>q</sub> = 18 kA  |

|   |  |
|---|--|
| — usable for High Faults up to 575/600 V according to UL  | Type: Class J / L, max. 800 A; Iq = 100 kA   |
| — usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL  | Type: Class J / L, max. 800 A; Iq = 18 kA  |
| — usable for High Faults at inside-delta circuit up to 575/600 V according to UL  | Type: Class J / L, max. 800 A; Iq = 100 kA   |
| <b>operating power [hp] for 3-phase motors</b>  |  |
| • at 200/208 V at 50 °C rated value   | 60 hp  |
| • at 220/230 V at 50 °C rated value   | 75 hp  |
| • at 460/480 V at 50 °C rated value   | 150 hp   |
| • at 575/600 V at 50 °C rated value   | 200 hp   |
| • at 200/208 V at inside-delta circuit at 50 °C rated value   | 125 hp   |
| • at 220/230 V at inside-delta circuit at 50 °C rated value   | 150 hp   |
| • at 460/480 V at inside-delta circuit at 50 °C rated value   | 300 hp   |
| • at 575/600 V at inside-delta circuit at 50 °C rated value   | 350 hp   |
| <b>contact rating of auxiliary contacts according to UL</b>   | R300-B300  |
| <b>Safety related data</b>  |  |
| <b>protection class IP on the front acc. to IEC 60529</b>   | IP00; IP20 with cover  |
| <b>touch protection on the front acc. to IEC 60529</b>  | finger-safe, for vertical contact from the front with cover                                  |
| <b>electromagnetic compatibility</b>  | acc. to IEC 60947-4-2  |
| <b>ATEX</b>   |  |
| <b>certificate of suitability</b>   |  |
| • ATEX  | Yes  |
| • IECEx   | Yes  |
| • according to ATEX directive 2014/34/EU  | BVS 18 ATEX F 003 X  |
| <b>type of protection according to ATEX directive 2014/34/EU</b>  | II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb] |
| <b>hardware fault tolerance acc. to IEC 61508 relating to ATEX</b>  | 0  |
| <b>PFDavg with low demand rate acc. to IEC 61508 relating to ATEX</b>   | 0.008  |
| <b>PFHD with high demand rate acc. to EN 62061 relating to ATEX</b>   | 0.0000005 1/h  |
| <b>Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX</b>  | SIL1   |
| <b>T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX</b>  | 3 y  |
| <b>Certificates/ approvals</b>  |  |
| General Product Approval  |  |
| EMC   |  |
| For use in hazardous locations  |  |
|       |  |
| For use in hazardous locations  |  |
| Declaration of Conformity   |  |
| Test Certificates   |  |
| Marine / Shipping   |  |
|   <a href="#">Type Test Certificates/Test Report</a>                                     |  |
| other   |  |

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5544-6HA16>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5544-6HA16>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5544-6HA16>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5544-6HA16&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5544-6HA16&lang=en)

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current



<https://support.industry.siemens.com/cs/ww/en/ps/3RW5544-6HA16/char>


Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5544-6HA16&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

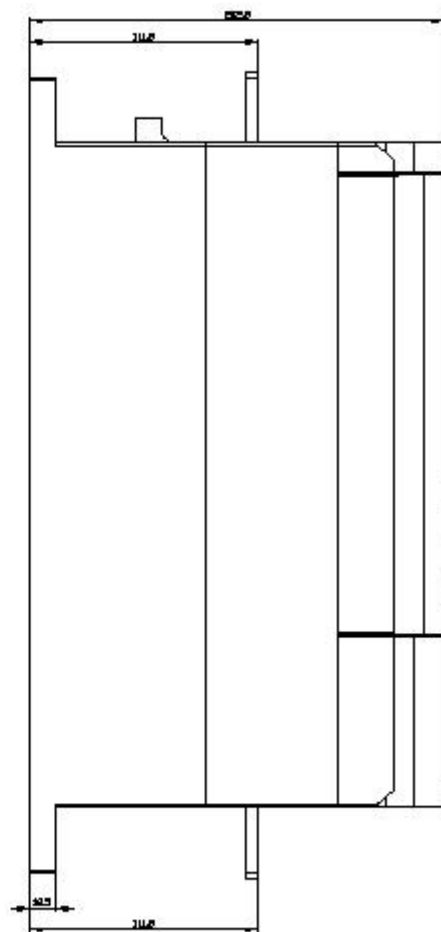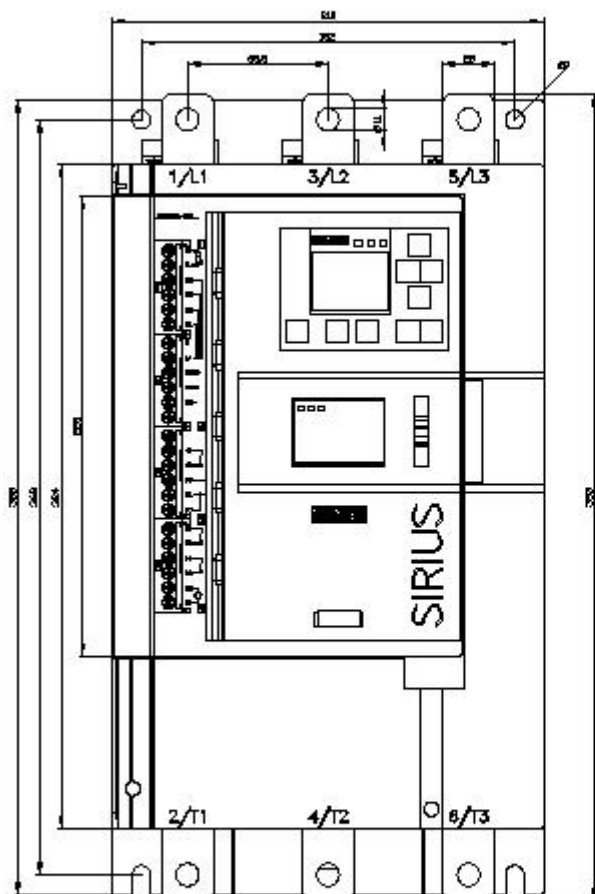

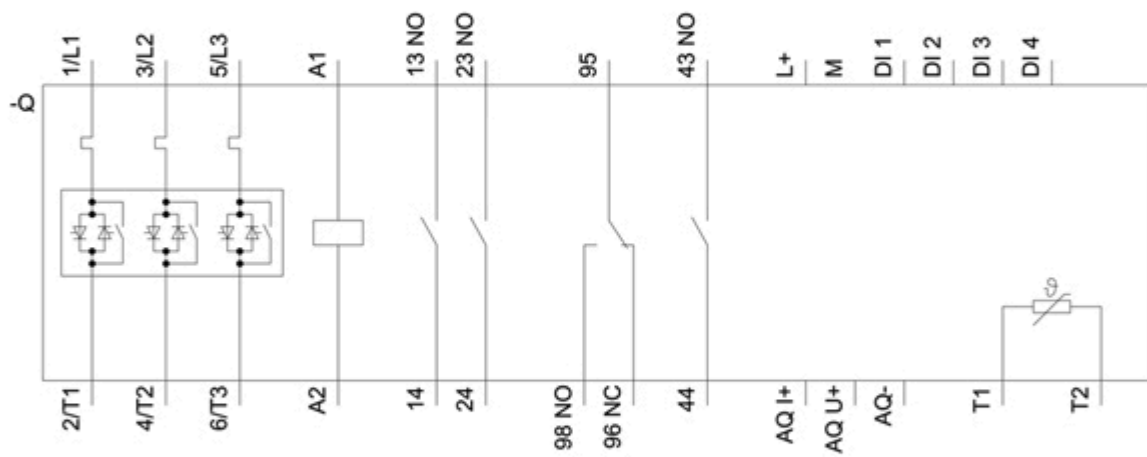

last modified:

3/9/2021 