



Buzzer element, black, continuous tone or pulsating, adjustable, 85 dB, 24 V AC/DC, diameter 50 mm

General technical data				
product brand name		SIRIUS		
product designation		Buzzer element		
type of voltage of the operating voltage		AC/DC		
operating voltage				
• 1 at DC rated value	24 V			
• 1 at AC at 50 Hz rated value	24 V			
• 1 at AC at 60 Hz rated value	24 V			
relative positive tolerance of the operating voltage		10 %		
relative negative tolerance of the operating voltage		-10 %		
consumed current maximum		30 mA		
type of acoustic signal		continuous tone / pulse tone		
loudness level		85 dB		
service life of acoustic signal device		5 000 h		
tone frequency				
• 1	2.5 kHz			
material		PC		
color		black		
fastening method		Bayonet		
reference code				
• acc. to DIN EN 61346-2	P			
• acc. to IEC 81346-2	P			
Mechanical data				
outer diameter of the signal column element		50 mm		
Ambient conditions				
ambient temperature during operation		-20 ... +50 °C		
protection class IP		IP54		
product function adjustable acoustic signal		Yes		
height		72 mm		
width		52 mm		
Certificates/ approvals				
General Product Approval		EMC	Declaration of Conformity	other



[UK Declaration of Conformity](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4220-0FA>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4220-0FA>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4220-0FA>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4220-0FA&lang=en

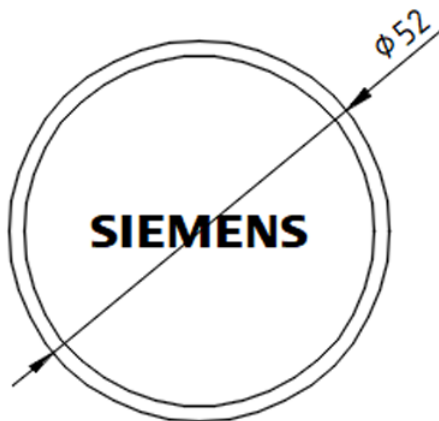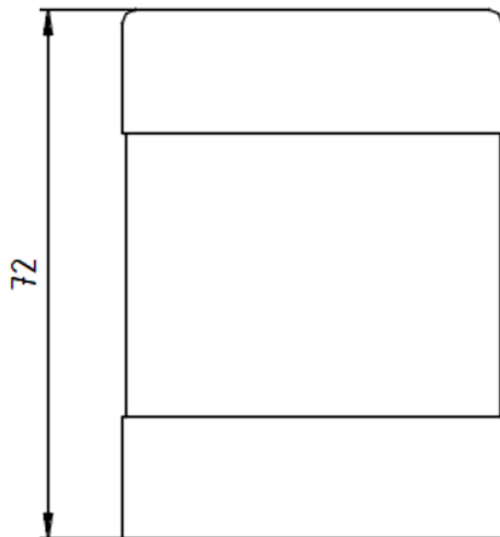

-P

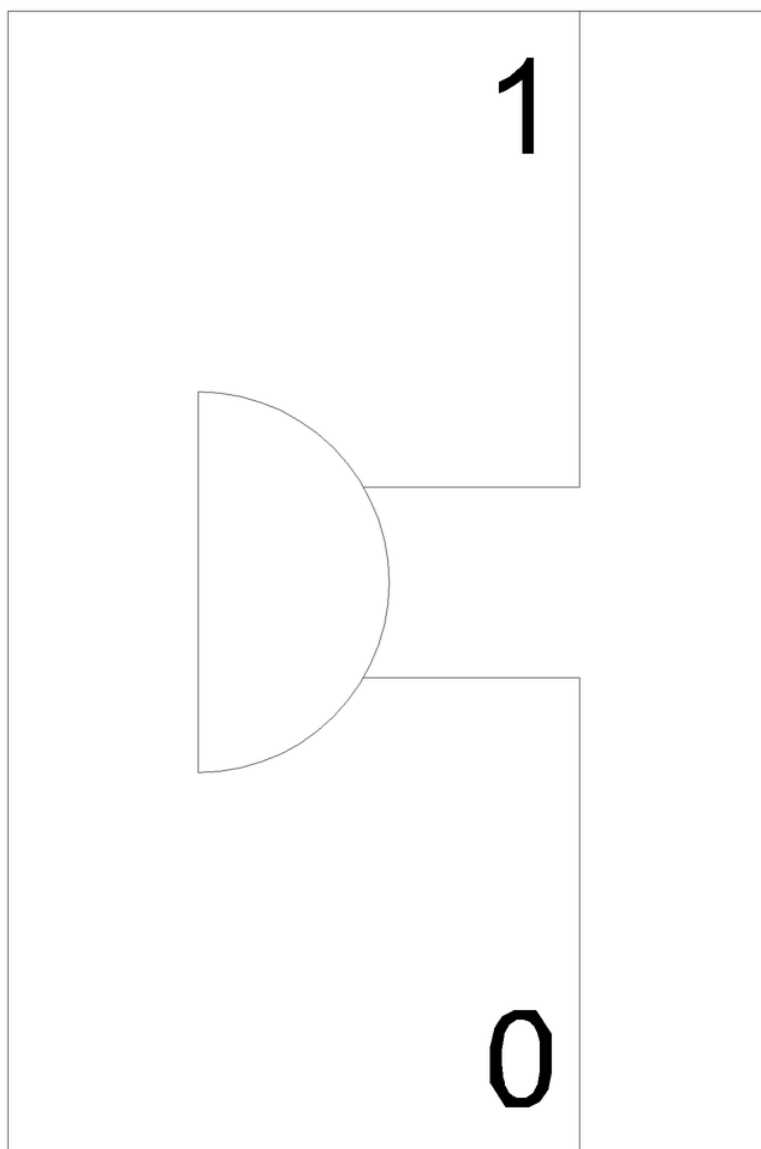

last modified:

12/23/2020 [🔗](#)