






Semiconductor relay, 1-phase 3RF2 Overall width 22.5 mm, 90 A 48-460 V / 4-30 V DC Ring cable connection

product brand name	SIRIUS
product designation	solid-state relay
design of the product	single-phase
product type designation	3RF21
manufacturer's article number	
• _1 of the accessories that can be ordered	3RF2900-3PA88
• _3 of the accessories that can be ordered	3RF2900-0EA18
• _4 of the accessories that can be ordered	3RF2990-0GA16
product designation	
• _1 of the accessories that can be ordered	terminal cover
• _3 of the accessories that can be ordered	converter
• _4 of the accessories that can be ordered	load monitoring
General technical data	
product function	zero-point switching
power loss [V·A] maximum	118 V·A
power loss [W] for rated value of the current at AC in hot operating state	118 W
• per pole	118 W
power loss [W] for rated value of the current without load current share typical	0.5 W
insulation voltage rated value	600 V
type of voltage of the control supply voltage	DC
surge voltage resistance of main circuit rated value	6 kV
shock resistance acc. to IEC 60068-2-27	15g / 11 ms
vibration resistance acc. to IEC 60068-2-6	2g
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	28.05.2009 00:00:00
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
operating voltage at AC	
• at 50 Hz rated value	48 ... 460 V
• at 60 Hz rated value	48 ... 460 V
operating frequency rated value	50 ... 60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operating range relative to the operating voltage at AC	

<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	40 ... 506 V 40 ... 506 V
operational current	
<ul style="list-style-type: none"> • at AC-51 rated value • acc. to UL 508 rated value 	88 A 80 A
ampacity maximum	90 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/μs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	1 150 A
I²t value maximum	6 600 A ² ·s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
<ul style="list-style-type: none"> • at DC rated value • at DC 	30 V 4 ... 30 V
control supply voltage	
<ul style="list-style-type: none"> • at DC initial value for signal <1> detection • at DC full-scale value for signal<0> recognition 	4 V 1 V
control current at minimum control supply voltage	
<ul style="list-style-type: none"> • at DC 	13 mA
control current at DC rated value	15 mA
ON-delay time	1 ms; additionally max. one half-wave
OFF-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw fixing
<ul style="list-style-type: none"> • side-by-side mounting 	Yes
tightening torque of fixing screw maximum	1.5 N·m
tightening torque [lbf·in] of fixing screw maximum	13 lbf·in
height	85 mm
width	22.5 mm
depth	48 mm
Connections/ Terminals	
type of electrical connection	
<ul style="list-style-type: none"> • for main current circuit • for auxiliary and control circuit 	Ring cable lug connection ring cable connection
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for main contacts for JIS cable lug • for DIN cable lug for main contacts 	JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5 DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for auxiliary and control contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts 	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²) 1x (AWG 20 ... 12)
tightening torque	
<ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals 	2 ... 2.5 N·m 0.5 ... 0.6 N·m
tightening torque [lbf·in]	

<ul style="list-style-type: none">• for main contacts with screw-type terminals• for auxiliary and control contacts with screw-type terminals	7 ... 10.3 lbf·in 4.5 ... 5.3 lbf·in		
design of the thread of the connection screw <ul style="list-style-type: none">• for main contacts• of the auxiliary and control contacts	M5 M3		
stripped length of the cable <ul style="list-style-type: none">• for main contacts• for auxiliary and control contacts	7 mm 7 mm		
Safety related data			
protection class IP on the front acc. to IEC 60529	IP00; IP20 with cover		
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front with cover		
Ambient conditions			
installation altitude at height above sea level maximum	1 000 m		
ambient temperature <ul style="list-style-type: none">• during operation• during storage	-25 ... +60 °C -55 ... +80 °C		
Electromagnetic compatibility			
conducted interference <ul style="list-style-type: none">• due to burst acc. to IEC 61000-4-4• due to conductor-earth surge acc. to IEC 61000-4-5• due to conductor-conductor surge acc. to IEC 61000-4-5• due to high-frequency radiation acc. to IEC 61000-4-6	2 kV / 5 kHz behavior criterion 2 2 kV behavior criterion 2 1 kV behavior criterion 2 140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1		
field-based interference acc. to IEC 61000-4-3	80 MHz ... 1 GHz 10 V/m, behavior criterion 1		
electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2		
conducted HF interference emissions acc. to CISPR11	Class A for industrial environment		
field-bound HF interference emission acc. to CISPR11	Class B for the domestic, business and commercial environments		
Short-circuit protection, design of the fuse link			
manufacturer's article number <ul style="list-style-type: none">• of full range R fuse link for semiconductor protection at NH design usable• of back-up R fuse link for semiconductor protection at NH design usable• of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable	3NE1021-2 3NE8021-1 3NC2280; These fuses have a smaller rated current than the semiconductor relays		
manufacturer's article number of the gG fuse <ul style="list-style-type: none">• at NH design usable• at cylindrical design 22 x 58 mm usable	3NA6812; These fuses have a smaller rated current than the semiconductor relays 3NW6212-1; These fuses have a smaller rated current than the semiconductor relays		
manufacturer's article number <ul style="list-style-type: none">• of DIAZED fuse usable• of NEOZED fuse usable	5SB4111; These fuses have a smaller rated current than the semiconductor relays 5SE2335; These fuses have a smaller rated current than the semiconductor relays		
Certificates/ approvals			
General Product Approval	EMC	Declaration of Conformity	Test Certificates
			
			Type Test Certificates/Test Report
other			



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2190-3AA44>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2190-3AA44>



Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2190-3AA44>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2190-3AA44&lang=en

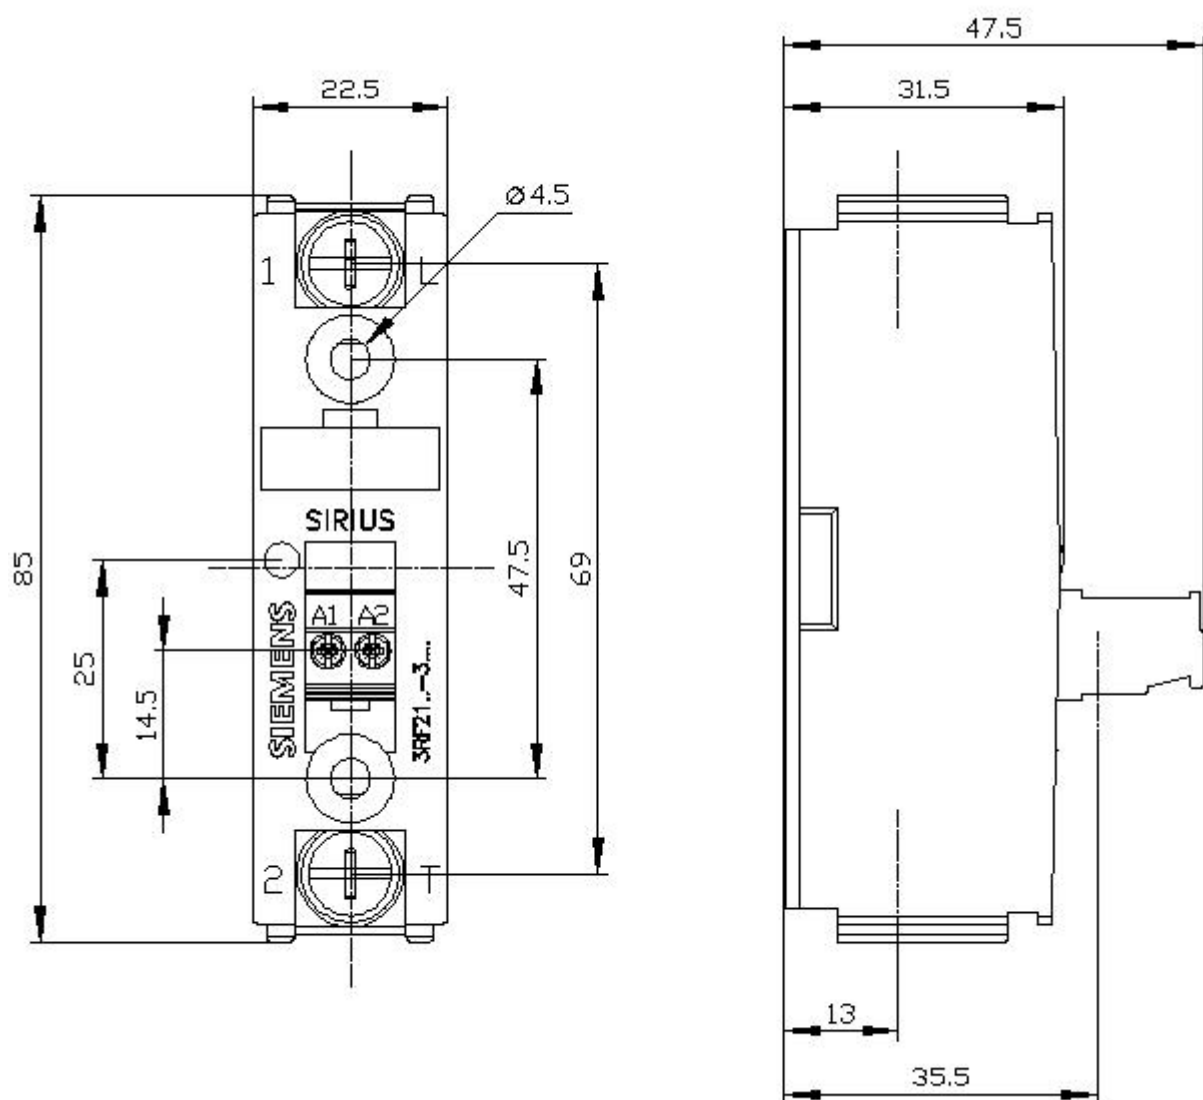

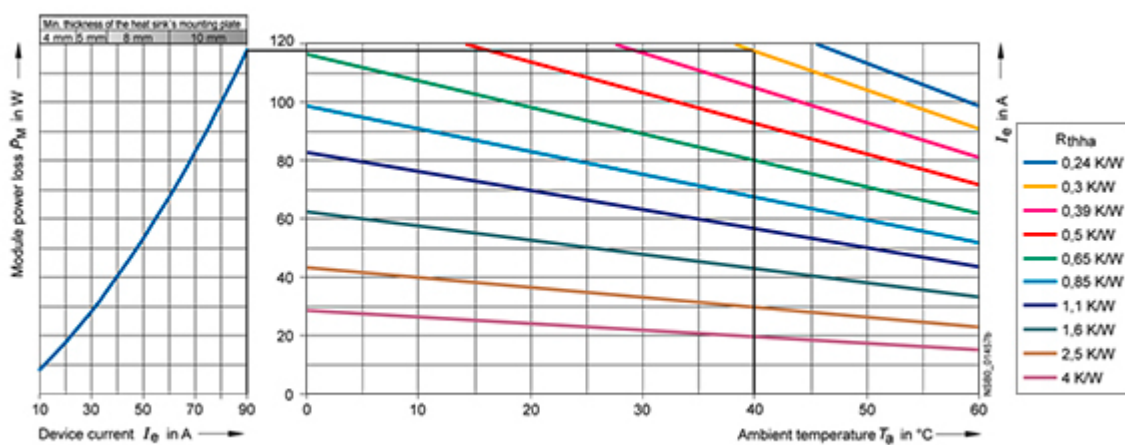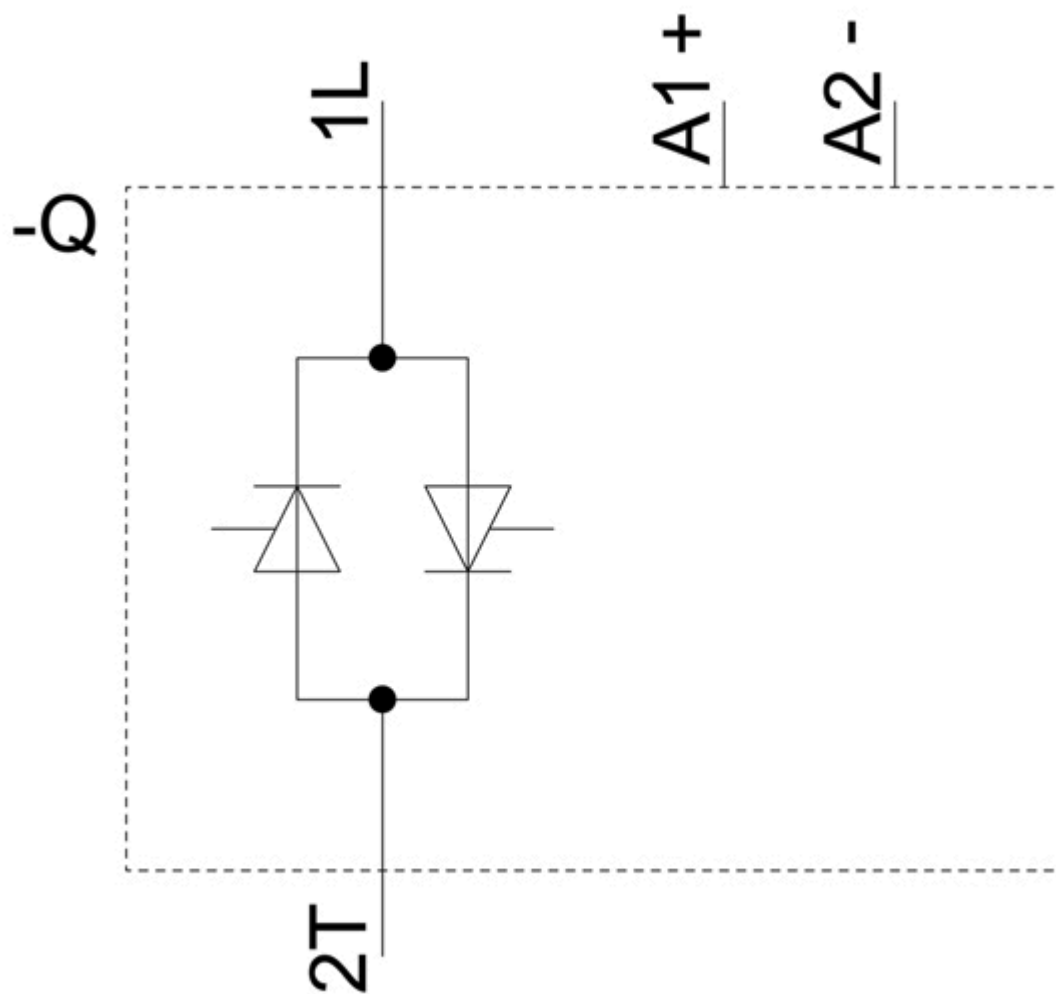

last modified:

3/3/2021