



Continuous light element, red, 12-230 V AC/DC, 70 mm diameter, base BA 15d without light element

General technical data				
product brand name	SIRIUS			
product designation	Continuous light element			
design of the optical signal	continuous light			
type of voltage of the operating voltage	AC/DC			
operating voltage • at DC rated value • at AC at 50 Hz rated value • at AC at 60 Hz rated value	12 ... 230 V 12 ... 230 V 12 ... 230 V			
material	PC			
color	red			
fastening method	Bayonet			
reference code • acc. to DIN EN 61346-2 • acc. to IEC 81346-2	P P			
Mechanical data				
outer diameter of the signal column element	70 mm			
Lamp				
product component light source	No			
type of light source	filament lamp / LED			
light intensity	0.5 cd			
light intensity	0.38 ... 0.66 cd			
socket design	BA 15d			
Ambient conditions				
ambient temperature during operation	-20 ... +60 °C			
protection class IP	IP65			
height	65.5 mm			
width	70 mm			
Certificates/ approvals				
General Product Approval		EMC	Declaration of Conformity	other



[UK Declaration of Conformity](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4400-1AB>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4400-1AB>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4400-1AB>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4400-1AB&lang=en

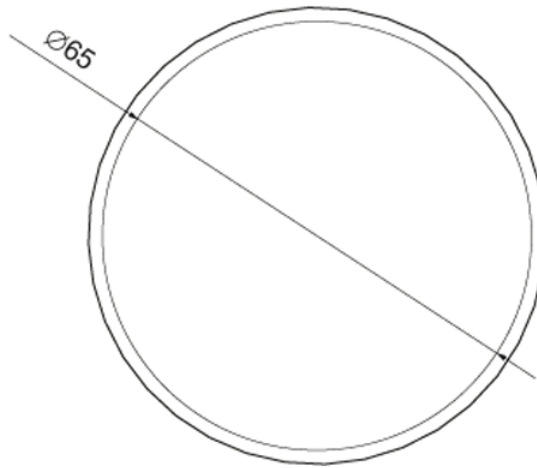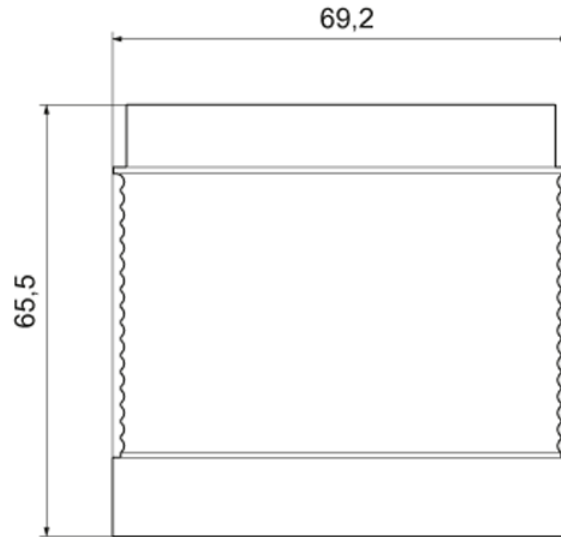

-P

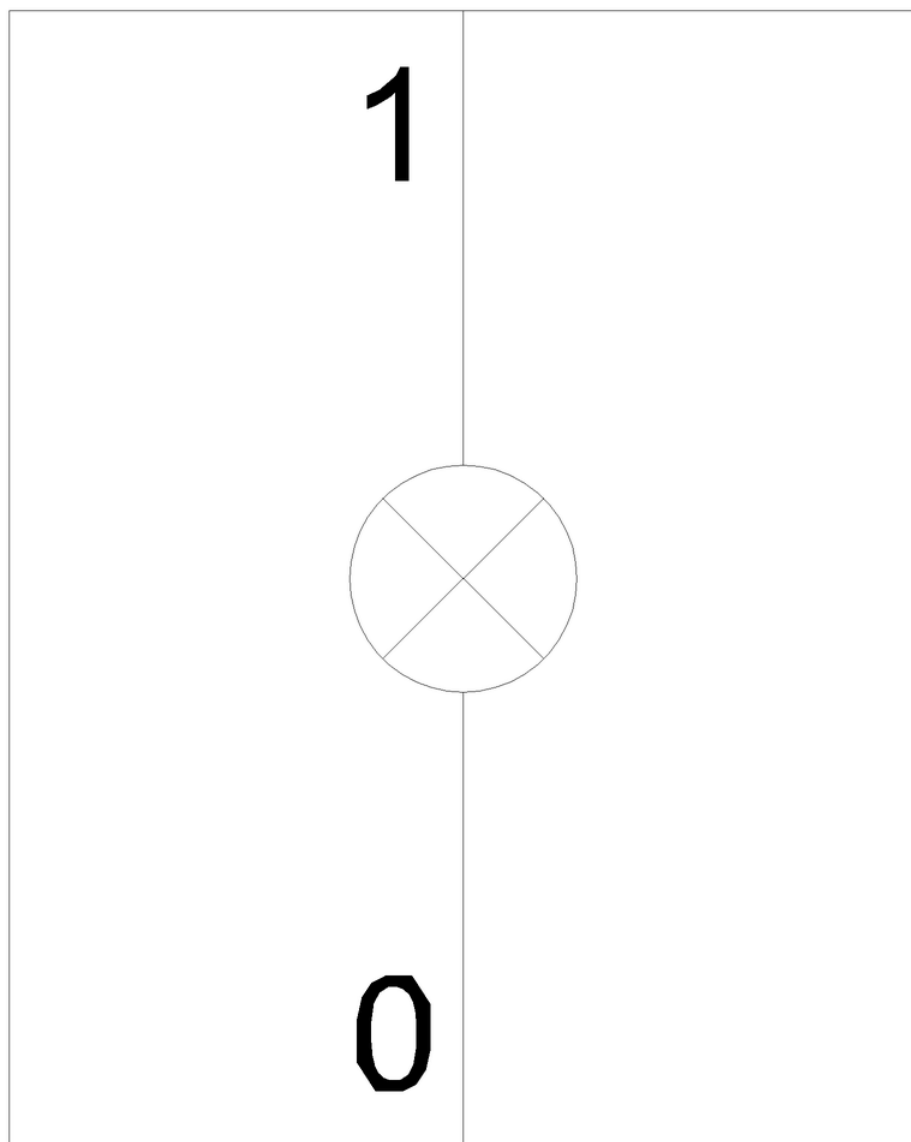

last modified:

2/25/2021 