


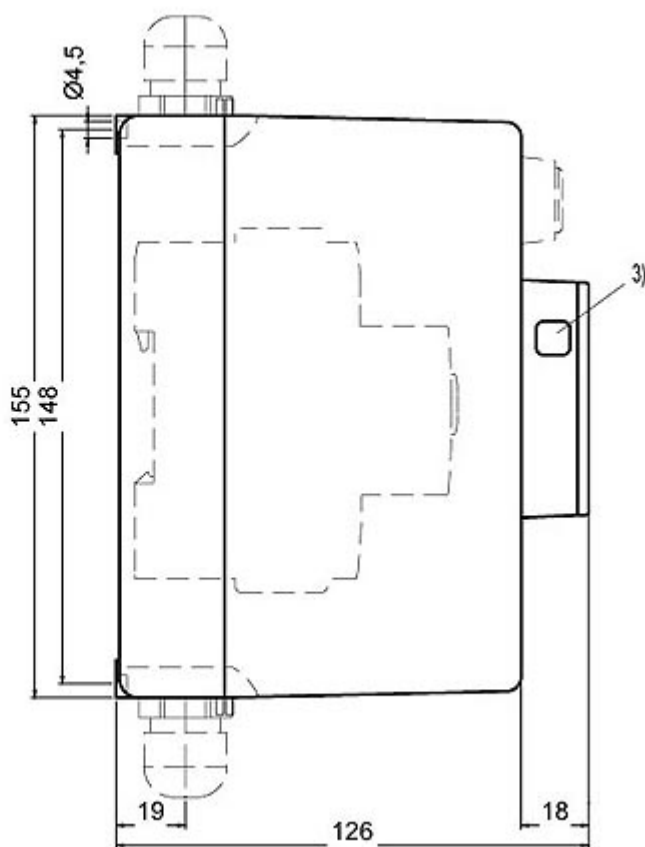


Figure similar

Molded-plastic enclosure for surface mounting Degree of protection IP55 with N and PE terminal Can be locked in O position 72 mm with metric cable gland No UL/CSA approval

General technical data		
product designation		ISO surface-mounted housing
design of the product		Assembly
material of the enclosure		plastic
protection class IP of the enclosure		IP55
product component transparent cover		No
Installation/ mounting/ dimensions		
width	mm	105
height	mm	155
depth	mm	126
Certificates/ approvals		
Declaration of Conformity	Test Certificates	Shipping Approval
Miscellaneous	Special Test Certificate	Type Test Certificates/Test Report
		
EG-Konf.		
		RMRS
other		
Confirmation	Miscellaneous	

Further information
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1923-1DA00
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1923-1DA00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RV1923-1DA00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1923-1DA00&lang=en

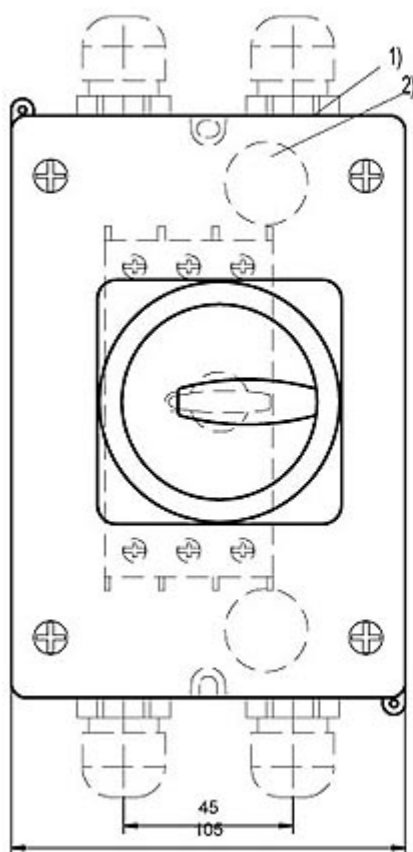

- 1) Ausbrechöffnung fuer Verschraubung M25
- 2) Ausbrechöffnung fuer ruckseitige Leitungseinfuehrung
- 3) Oeffnung fuer Vorhaengeschoess mit Buegeldurchmesser max. 8 mm

last modified:

12/23/2020 [🔗](#)