



Integrated signal lamp, rotating light, with integrated LED, yellow, 24 V AC/DC, Diameter 70 mm

General technical data				
product designation		Rotating light element		
consumed current maximum		40 mA		
type of voltage of the operating voltage		AC/DC		
operating voltage				
● 1 at DC rated value				
● 1 at AC at 50 Hz rated value				
● 1 at AC at 60 Hz rated value		24 V		
relative positive tolerance of the operating voltage		10 %		
relative negative tolerance of the operating voltage		-10 %		
speed		120 1/min		
reference code acc. to IEC 81346-2		P		
fastening method		Bayonet / flush mounting		
material		PC; PC/ABS; PA		
color		yellow		
Mechanical data				
product component light source		Yes		
type of electrical connection		screw-type terminals		
outer diameter of the signal column element		75 mm		
Lamp				
design of the optical signal		rotating light		
type of light source		LED		
light intensity		3.3 cd		
service life of LED		100 000 h		
Ambient conditions				
ambient temperature during operation		-20 ... +50 °C		
protection class IP		IP65		
depth		31 mm		
height		66 mm		
width		75 mm		
Certificates/ approvals				
General Product Approval		EMC	Declaration of Conformity	other



[Miscellaneous](#)



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD5320-5DD>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD5320-5DD>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD5320-5DD>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD5320-5DD&lang=en

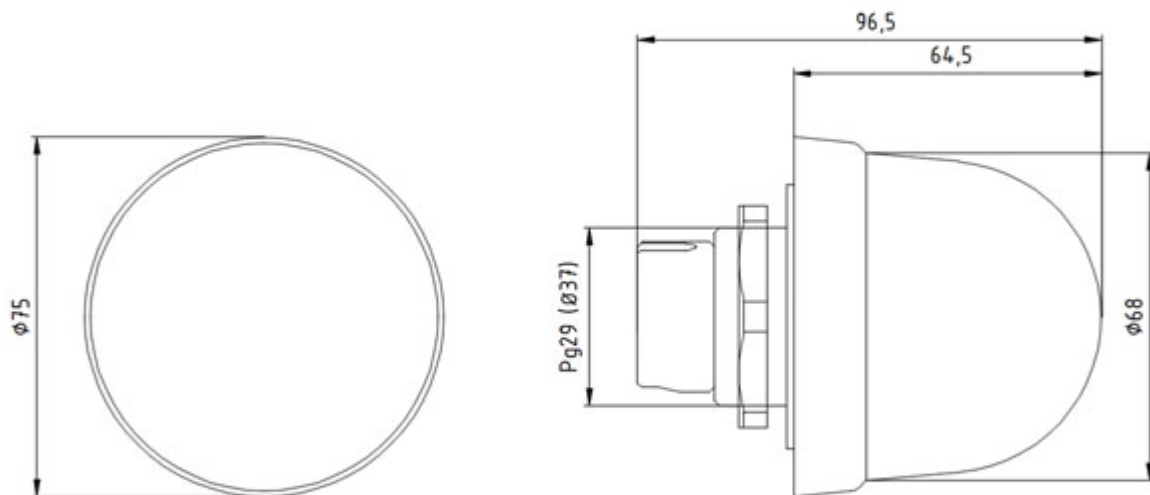

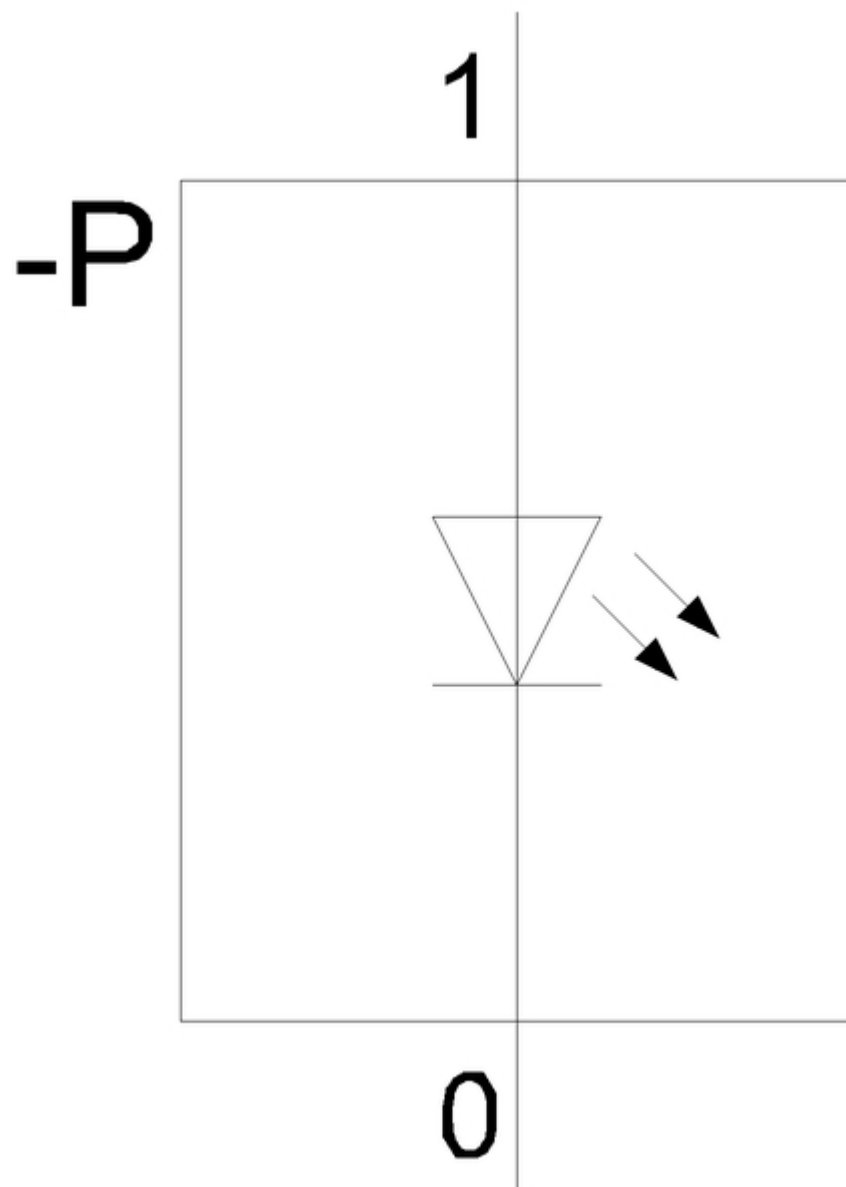

last modified:

12/21/2020 