



Fail-safe reversing starter, 3RM1, 500 V, 0.55 - 3 kW, 1.6 - 7 A, 24 V DC, spring-type terminals

product brand name	SIRIUS
product category	Motor starter
product designation	Failsafe reversing starters
design of the product	With electronic overload protection and safety-related disconnection
product type designation	3RM1
General technical data	
trip class	CLASS 10A
equipment variant acc. to IEC 60947-4-2	3
product function	fail-safe reversing starter
• intrinsic device protection	Yes
• for power supply reverse polarity protection	Yes
suitability for operation device connector 3ZY12	Yes
power loss [W] for rated value of the current at AC in hot operating state per pole	1.13 W
insulation voltage rated value	500 V
overvoltage category	III
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	500 V
• between control and auxiliary circuit	250 V
shock resistance	6g / 11 ms
vibration resistance	1 ... 6 Hz, 15 mm; 20 m/s ² , 500 Hz
operating frequency maximum	1 1/s
mechanical service life (switching cycles) typical	15 000 000
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	01.03.2017 00:00:00
product function	
• direct start	No
• reverse starting	Yes
product function short circuit protection	No
Electromagnetic compatibility	
EMC emitted interference acc. to IEC 60947-1	class A
EMC immunity acc. to IEC 60947-1	Class A
conducted interference	
• due to burst acc. to IEC 61000-4-4	3 kV / 5 kHz
• due to conductor-earth surge acc. to IEC 61000-4-5	4 kV signal lines 2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	2 kV

<ul style="list-style-type: none"> • due to high-frequency radiation acc. to IEC 61000-4-6 	10 V
field-based interference acc. to IEC 61000-4-3	10 V/m
electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
conducted HF interference emissions acc. to CISPR11	Class B for the domestic, business and commercial environments
field-bound HF interference emission acc. to CISPR11	Class B for the domestic, business and commercial environments
Safety related data	
safety device type acc. to IEC 61508-2	Type B
Safety Integrity Level (SIL) acc. to IEC 61508	3
SIL Claim Limit (subsystem) acc. to EN 62061	SILCL 3
performance level (PL) acc. to EN ISO 13849-1	e
category acc. to EN ISO 13849-1	4
stop category acc. to DIN EN 60204-1	0
Safe failure fraction (SFF)	99.4 %
average diagnostic coverage level (DCavg)	99 %
diagnostics test interval by internal test function maximum	600 s
function test interval maximum	1 y
failure rate [FIT]	
<ul style="list-style-type: none"> • at rate of recognizable hazardous failures (λ_{dd}) • at rate of non-recognizable hazardous failures (λ_{du}) 	1 400 FIT 16 FIT
PFHD with high demand rate acc. to EN 62061	0.00000002 1/h
PFDavg with low demand rate acc. to IEC 61508	0.000018
MTTFd	75 y
hardware fault tolerance acc. to IEC 61508	1
T1 value for proof test interval or service life acc. to IEC 61508	20 y
safe state	Load circuit open
protection class IP on the front acc. to IEC 60529	IP20
touch protection on the front acc. to IEC 60529	finger-safe
OFF-delay time with safety-related request	
<ul style="list-style-type: none"> • when switched off via control inputs maximum • when switched off via supply voltage maximum 	43 ms 120 ms
hardware fault tolerance acc. to IEC 61508 relating to ATEX	0
PFDavg with low demand rate acc. to IEC 61508 relating to ATEX	0.0005
PFHD with high demand rate acc. to EN 62061 relating to ATEX	0.00000005 1/h
Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX	SIL2
T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX	3 y
Main circuit	
number of poles for main current circuit	3
design of the switching contact	Hybrid
adjustable current response value current of the current-dependent overload release	1.6 ... 7 A
minimum load [%]	20 %; from set rated current
type of the motor protection	solid-state
operating voltage rated value	48 ... 500 V
relative symmetrical tolerance of the operating voltage	10 %
operating frequency 1 rated value	50 Hz
operating frequency 2 rated value	60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operational current	
<ul style="list-style-type: none"> • at AC at 400 V rated value • at AC-53a at 400 V at ambient temperature 40 °C rated value 	7 A 7 A

ampacity when starting maximum	56 A
operating power for 3-phase motors at 400 V at 50 Hz	0.55 ... 3 kW
derating temperature	40 °C
Inputs/ Outputs	
input voltage at digital input	
• at DC rated value	24 V
• with signal <0> at DC	0 ... 5 V
• for signal <1> at DC	15 ... 30
input current at digital input	
• for signal <1> at DC	8 mA
• with signal <0> at DC	1 mA
number of CO contacts for auxiliary contacts	1
operational current of auxiliary contacts at AC-15 at 230 V maximum	3 A
operational current of auxiliary contacts at DC-13 at 24 V maximum	1 A
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	19.2 ... 30 V
relative negative tolerance of the control supply voltage at DC	20 %
relative positive tolerance of the control supply voltage at DC	25 %
control supply voltage 1 at DC rated value	24 V
operating range factor control supply voltage rated value at DC	
• initial value	0.8
• full-scale value	1.25
control current at DC	
• in standby mode of operation	13 mA
• when switching on	150 mA
• during operation	57 mA
duration of inrush current peak at 24 V	85 ms
Response times	
ON-delay time	65 ... 76 ms
OFF-delay time	30 ... 43 ms
Installation/ mounting/ dimensions	
mounting position	vertical, horizontal, standing (observe derating)
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
height	100 mm
width	22.5 mm
depth	141.6 mm
required spacing	
• with side-by-side mounting	
— forwards	0 mm
— backwards	0 mm
— upwards	50 mm
— downwards	50 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— backwards	0 mm
— upwards	50 mm
— at the side	3.5 mm
— downwards	50 mm
Ambient conditions	
installation altitude at height above sea level maximum	4 000 m; For derating see manual
ambient temperature	
• during operation	-25 ... +60 °C

<ul style="list-style-type: none">during storageduring transport	-40 ... +70 °C -40 ... +70 °C	
environmental category during operation acc. to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6	
relative humidity during operation	10 ... 95 %	
air pressure acc. to SN 31205	900 ... 1 060 hPa	
Communication/ Protocol		
product function bus communication	No	
Connections/ Terminals		
type of electrical connection	spring-loaded terminals (push-in) for main circuit, spring-loaded terminals (push-in) for control circuit	
<ul style="list-style-type: none">for main current circuitfor auxiliary and control circuit	spring-loaded terminals (push-in) spring-loaded terminals (push-in)	
wire length for motor unshielded maximum	100 m	
type of connectable conductor cross-sections		
<ul style="list-style-type: none">for main contacts<ul style="list-style-type: none">— solid— finely stranded with core end processing— finely stranded without core end processingat AWG cables for main contacts	1x (0.5 ... 4 mm²) 1x (0.5 ... 2.5 mm²) 1x (0.5 ... 4 mm²) 1x (20 ... 12)	
connectable conductor cross-section for main contacts		
<ul style="list-style-type: none">solid or strandedfinely stranded with core end processingfinely stranded without core end processing	0.5 ... 4 mm² 0.5 ... 2.5 mm² 0.5 ... 4 mm²	
connectable conductor cross-section for auxiliary contacts		
<ul style="list-style-type: none">solid or strandedfinely stranded with core end processingfinely stranded without core end processing	0.5 ... 1.5 mm² 0.5 ... 1 mm² 0.5 ... 1.5 mm²	
type of connectable conductor cross-sections		
<ul style="list-style-type: none">for auxiliary contacts<ul style="list-style-type: none">— solid— finely stranded with core end processing— finely stranded without core end processingat AWG cables for auxiliary contacts	1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²) 1x (0,5 ... 1,0 mm²), 2x (0,5 ... 1,0 mm²) 1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²) 1x (20 ... 16), 2x (20 ... 16)	
AWG number as coded connectable conductor cross section		
<ul style="list-style-type: none">for main contactsfor auxiliary contacts	20 ... 12 20 ... 16	
UL/CSA ratings		
yielded mechanical performance [hp]		
<ul style="list-style-type: none">for single-phase AC motor<ul style="list-style-type: none">— at 110/120 V rated value— at 230 V rated valuefor 3-phase AC motor<ul style="list-style-type: none">— at 200/208 V rated value— at 220/230 V rated value— at 460/480 V rated value	0.25 hp 0.5 hp 1 hp 1.5 hp 3 hp	
operating voltage at AC at 60 Hz acc. to CSA and UL rated value	480 V	
Certificates/ approvals		
General Product Approval	EMC	For use in hazardous locations



Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates	other	Railway
---------------------------------------	---------------------------	-------------------	-------	---------

[Type Examination Certificate](#)



[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Special Test Certificate](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1307-2AA04>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1307-2AA04>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<https://support.industry.siemens.com/cs/ww/en/ps/3RM1307-2AA04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1307-2AA04&lang=en

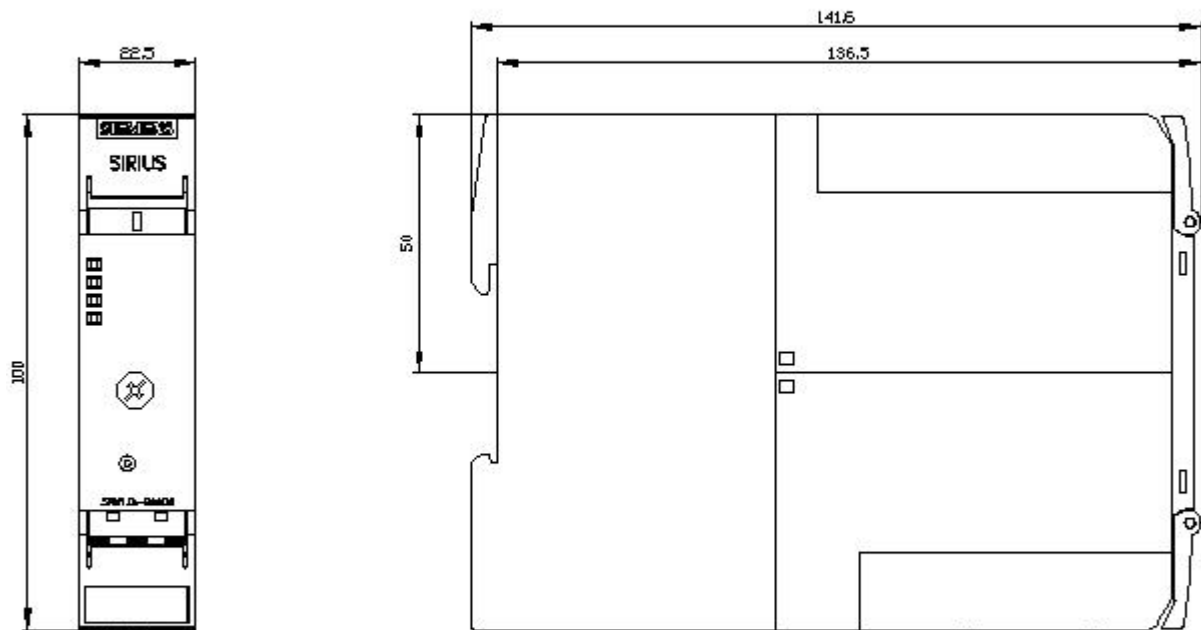

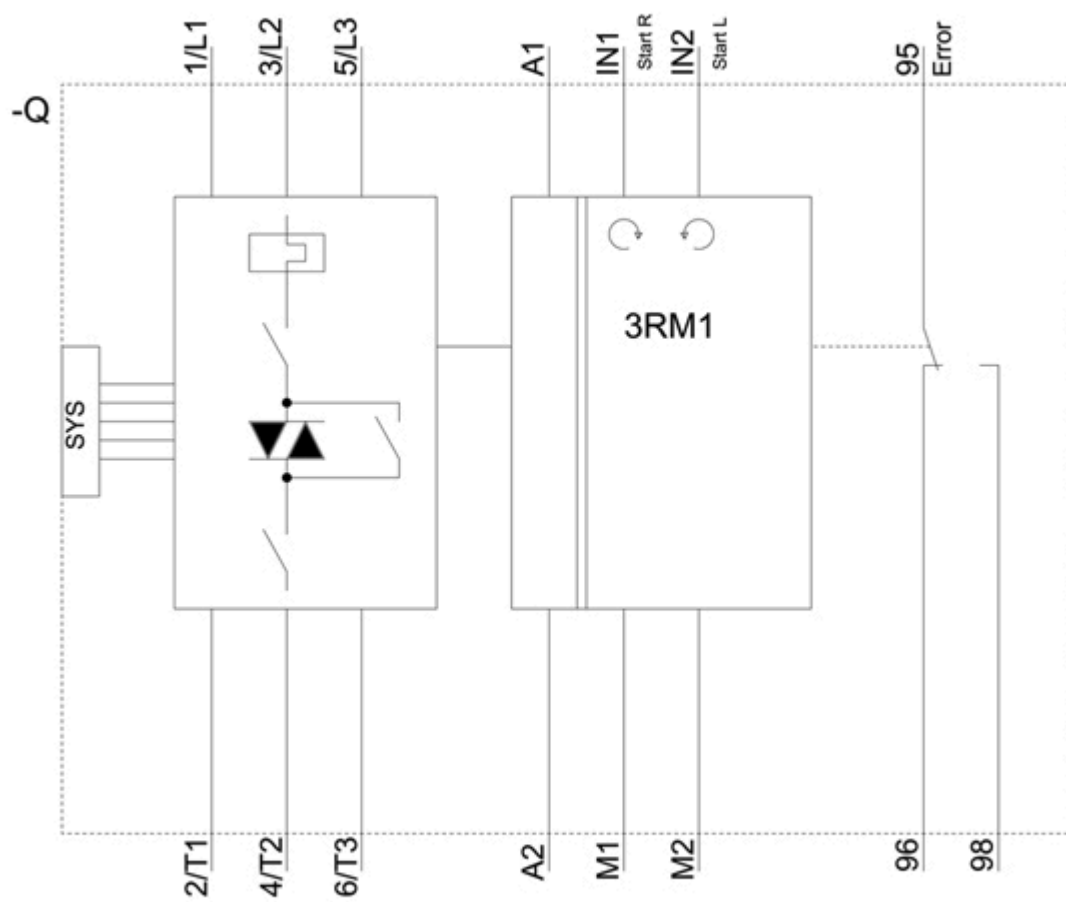

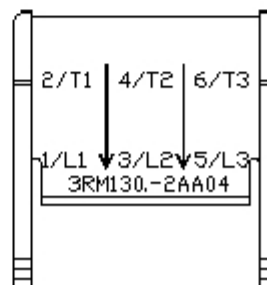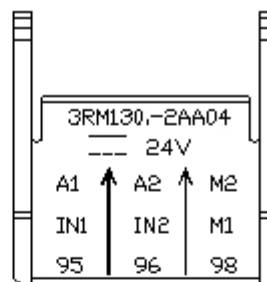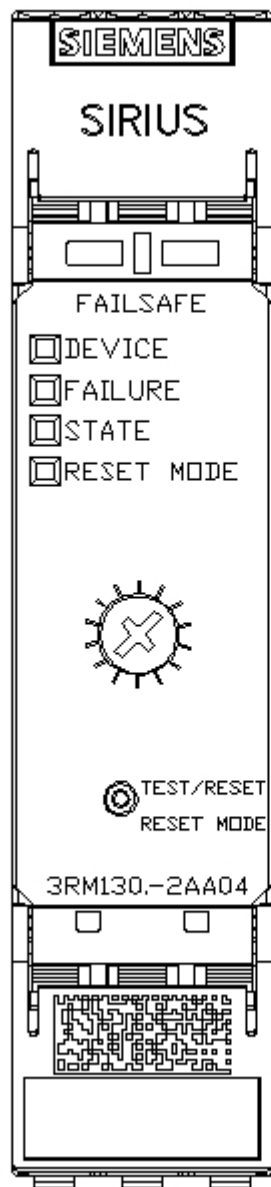

last modified:

7/28/2021 [🔗](#)