

LED, Base BA 15d, green, 24 V AC/DC, accessory for signaling columns, with diameters 50 mm and 70 mm



Figure similar

General technical data				
product brand name		SIRIUS		
product designation		LED		
type of voltage of the operating voltage		AC/DC		
operating voltage				
• 1 at DC rated value				
• 1 at AC at 50 Hz rated value				
• 1 at AC at 60 Hz rated value				
relative positive tolerance of the operating voltage		10 %		
relative negative tolerance of the operating voltage		-15 %		
consumed current maximum		15 mA		
color		green		
reference code				
• acc. to DIN EN 61346-2				
• acc. to IEC 81346-2				
Mechanical data				
outer diameter of the signal column element		70 mm		
Lamp				
type of light source		LED		
light intensity		1.05 cd		
socket design		BA 15d		
Ambient conditions				
ambient temperature during operation		-20 ... +60 °C		
height		45 mm		
width		20 mm		
Certificates/ approvals				
General Product Approval		EMC	Declaration of Conformity	other



[UK Declaration of
Conformity](#)



[Confirmation](#)

Further information
Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4428-6XC>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4428-6XC>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD4428-6XC>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4428-6XC&lang=en

-P

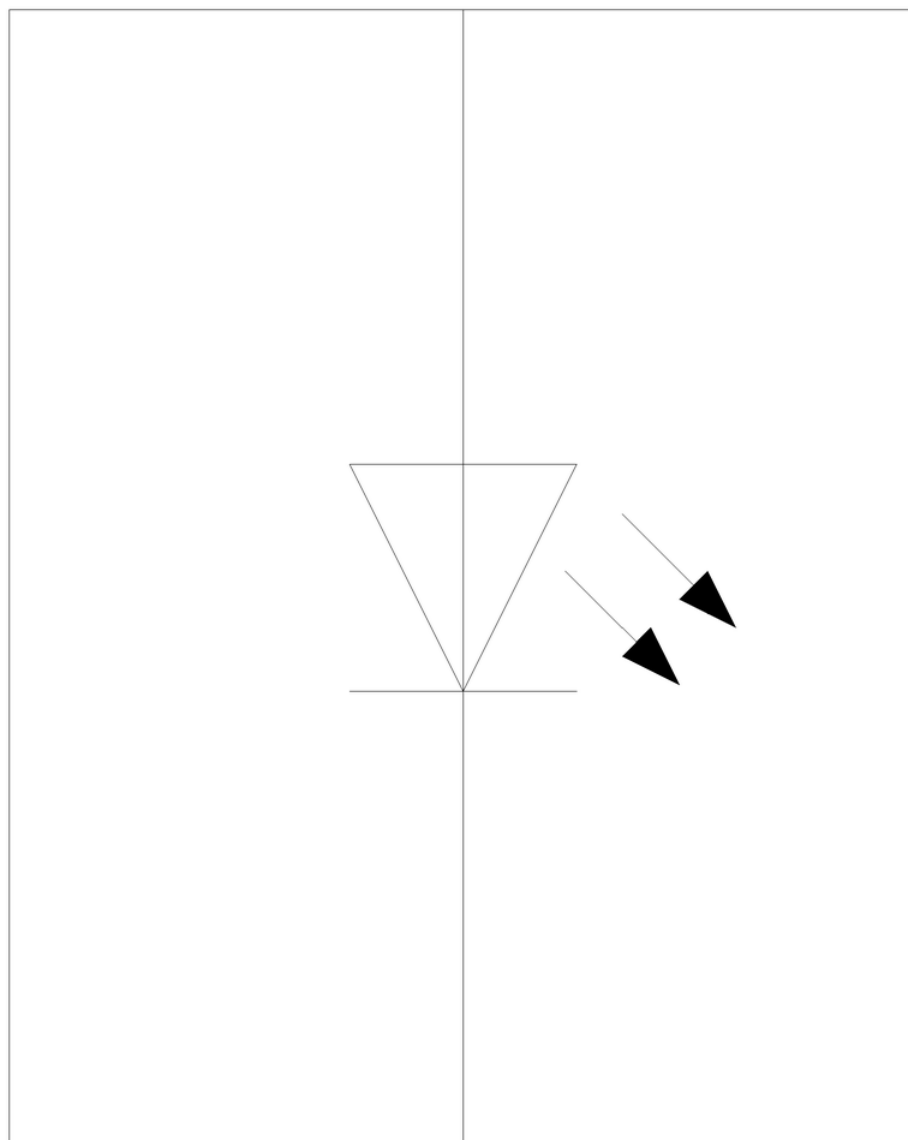

last modified:

12/23/2020 