

undervoltage release 24V DC accessory for: 3VA4/5/6

| Model | |
|--|-------------------|
| product brand name | SETRON |
| product designation | Accessories |
| Product version | Auxiliary release |
| Accessories | Auxiliary release |
| General technical data | |
| Degree of pollution | 3 |
| Overvoltage category | III |
| consumed active power / at DC / maximum | 2.5 W |
| Voltage | |
| rated insulation voltage U_i | 690 V |
| surge voltage resistance | 4 kV |
| control supply voltage (U_s) / at DC | 24V |
| Mechanical Design | |
| Height | 65.1 mm |
| Width | 25.7 mm |
| number of slots | 3 |
| depth | 28.8 mm |
| net weight | 91 g |
| tightening torque / with screw-type terminals / minimum | 0.4 N·m |
| tightening torque / with screw-type terminals / maximum | 0.5 N·m |
| Connections according IEC | |
| Type of auxiliary circuit connection | AWG18 / 750 mm |
| stripped length | 10 mm |
| Connections according UL | |
| stripped length [in] | 0.4 in |
| tightening torque [lbf·in] / with screw-type terminals / minimum | 3.5 lbf·in |
| tightening torque [lbf·in] / with screw-type terminals / maximum | 4.4 lbf·in |
| Further information | |

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)



<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9978-0BB11>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9978-0BB11>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9978-0BB11

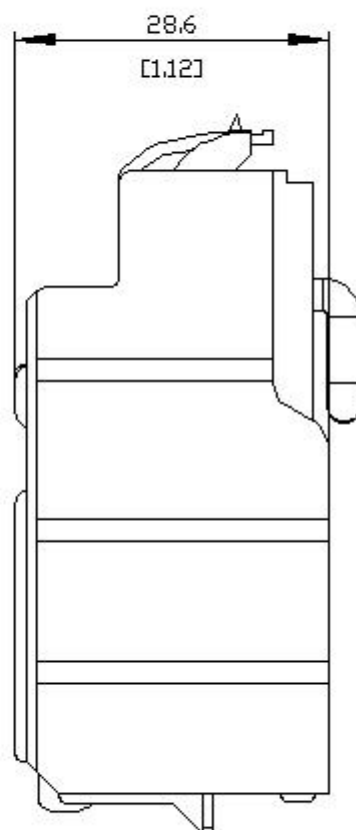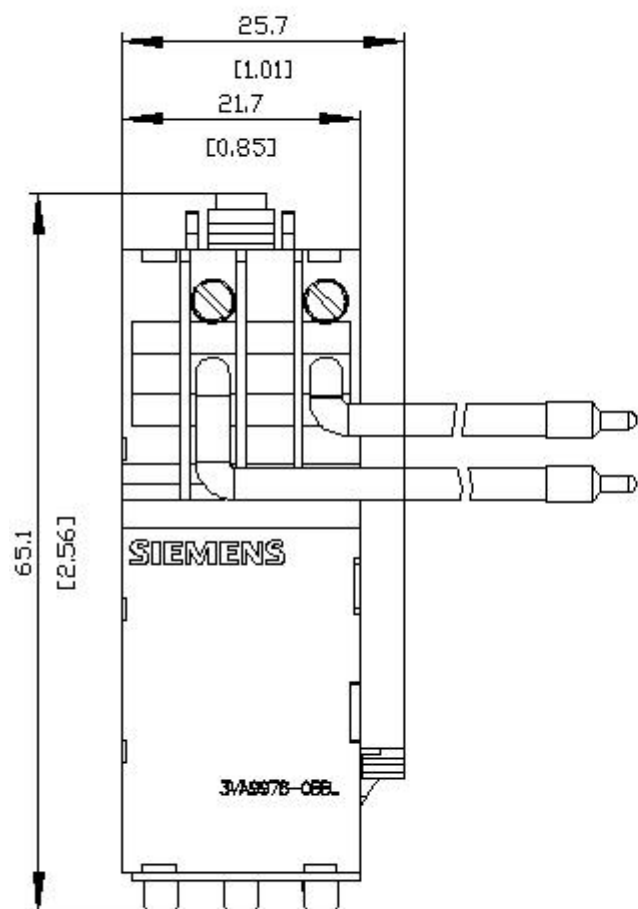

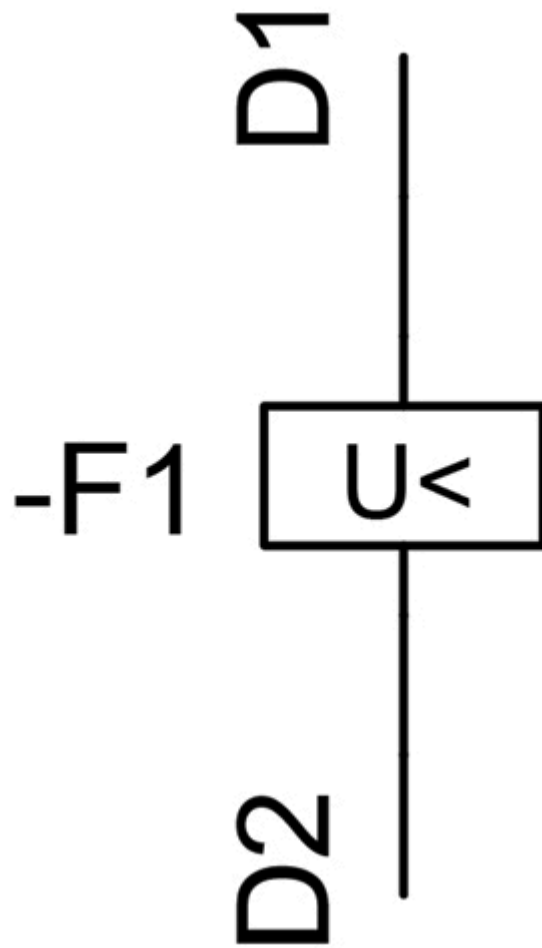

last modified:

12/20/2020 