

wire connector CU 3 units accessory for: 3VA6 150/250



| Model                                                                          |                                                   |
|--------------------------------------------------------------------------------|---------------------------------------------------|
| product brand name                                                             | SETRON                                            |
| product designation                                                            | accessories                                       |
| Product version                                                                | circular conductor terminal                       |
| Accessories                                                                    | Wire connector                                    |
| General technical data                                                         |                                                   |
| designation / of the terminal                                                  | TC1.4                                             |
| Connections according IEC                                                      |                                                   |
| stripped length                                                                | 20 mm                                             |
| Connections according UL                                                       |                                                   |
| permissible temperature / of connectable conductor / according to UL 486A-486B | 90 °C                                             |
| stripped length                                                                | 0.8 in                                            |
| connectable conductor cross-section                                            |                                                   |
| • for copper cable / stranded / minimum                                        | 6 AWG                                             |
| • for copper cable / stranded / maximum                                        | 350 kcmil                                         |
| • for copper cable / finely stranded / minimum                                 | 6 AWG                                             |
| • for copper cable / finely stranded / maximum                                 | 350 kcmil                                         |
| tightening torque / when using copper cables                                   |                                                   |
| • stranded                                                                     | 6 - 2 AWG: 140 lb-in 1 AWG - 350 kcmil: 275 lb-in |
| • finely stranded                                                              | 6 - 2 AWG: 140 lb-in 1 AWG - 350 kcmil: 275 lb-in |
| Further information                                                            |                                                   |

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9243-0JD12>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9243-0JD12>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9243-0JD12](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9243-0JD12)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://www.siemens.com/specifications>

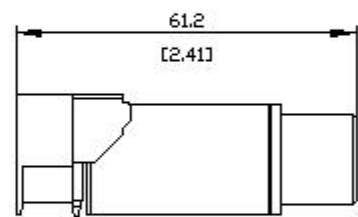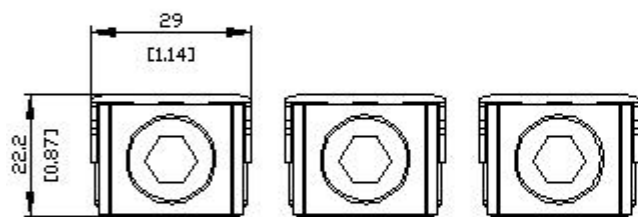

last modified:

4/6/2021 