



Buzzer element, continuous tone or pulsating, adjustable, 85 dB, black, 24 V AC/DC, diameter 70 mm

General technical data			
product brand name		SIRIUS	
product designation		Buzzer element	
type of voltage of the operating voltage		AC/DC	
operating voltage			
• 1 at DC rated value			
• 1 at AC at 50 Hz rated value			
• 1 at AC at 60 Hz rated value		24 V	
relative positive tolerance of the operating voltage		10 %	
relative negative tolerance of the operating voltage		-10 %	
consumed current maximum		25 mA	
type of acoustic signal		continuous tone / pulse tone	
loudness level		85 dB	
service life of acoustic signal device		5 000 h	
tone frequency			
• 1			
material		1.75 kHz	
color		PC	
fastening method		black	
reference code		Bayonet	
• acc. to DIN EN 61346-2		P	
• acc. to IEC 81346-2		P	
Mechanical data			
outer diameter of the signal column element		70 mm	
Ambient conditions			
ambient temperature during operation		-20 ... +50 °C	
protection class IP		IP65	
product function adjustable acoustic signal		Yes	
height		72 mm	
width		70 mm	
Certificates/ approvals			
General Product Approval		EMC	Declaration of Conformity
			other



[UK Declaration of
Conformity](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4420-0FA>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4420-0FA>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4420-0FA>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4420-0FA&lang=en

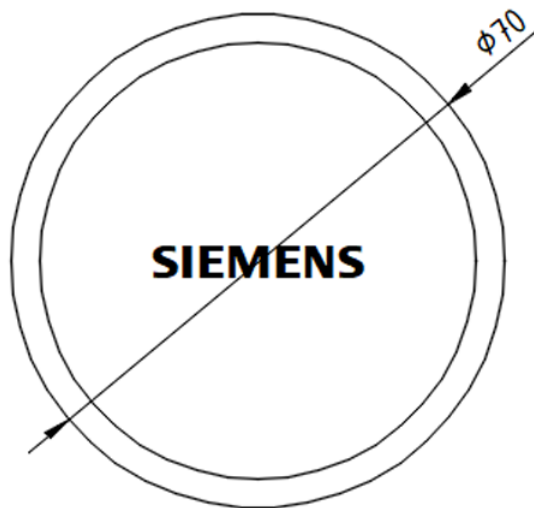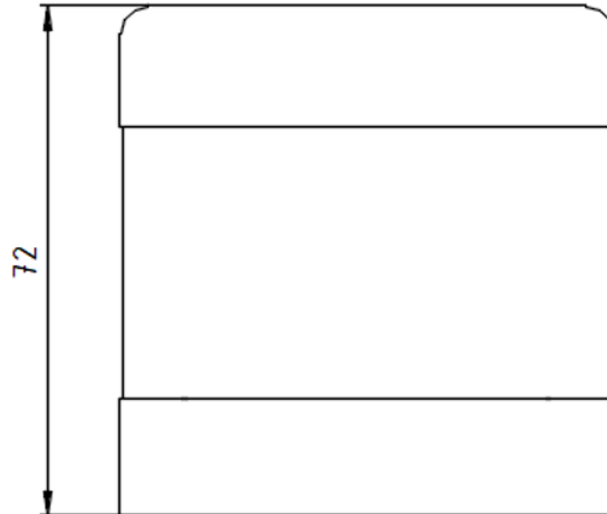

-P

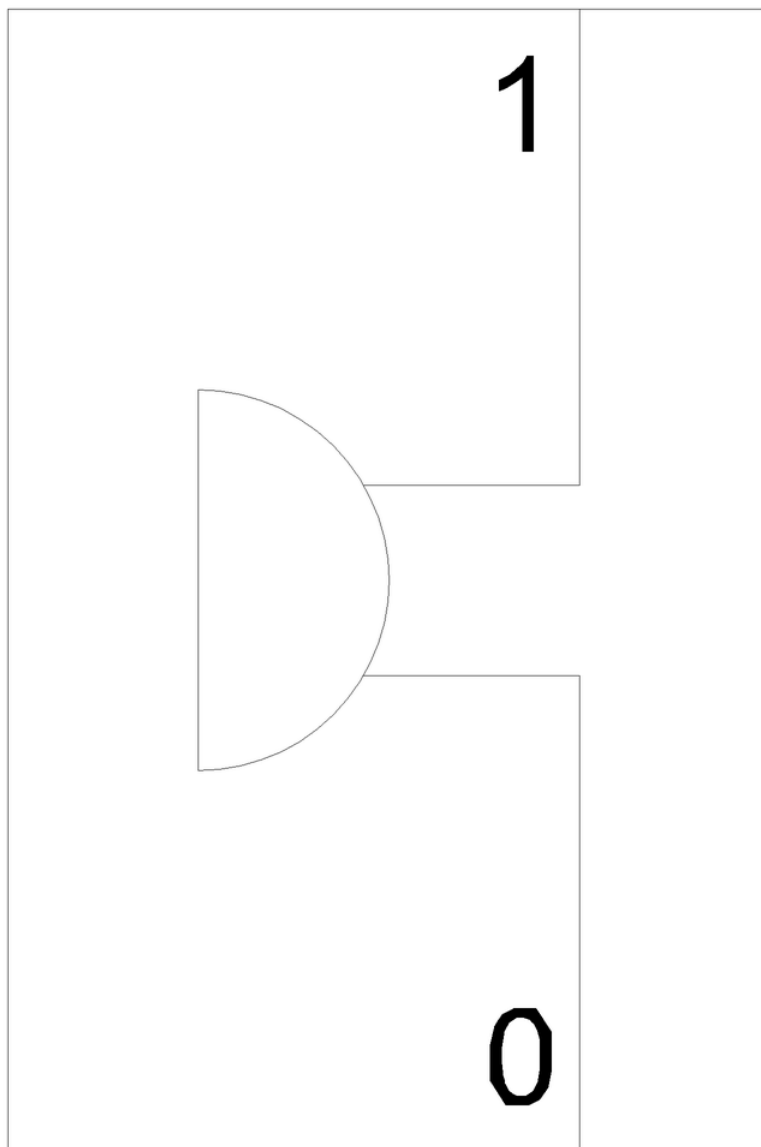

last modified:

12/23/2020 [🔗](#)