



Separate actuator, with vertical fixing for position switch with tumbler 3SE5312/3SE5322 and AS-i 3SF13 and position switch with separate actuator 3SE51/3SE52 and AS-i 3SF11/3SF12

product brand name	SIRIUS		
product designation	actuator		
product type designation	3SE5		
General technical data			
shock resistance	30g / 11 ms		
● acc. to IEC 60068-2-27			
vibration resistance	0.35 mm/5g		
● acc. to IEC 60068-2-6			
mechanical service life (switching cycles) typical	1 000 000		
reference code acc. to IEC 81346-2	T		
active principle	mechanical		
Substance Prohibitance (Date)	01.07.2006 00:00:00		
Drive Head			
design of the actuating element	Actuator with vertical attachment, die-cast zinc		
Ambient conditions			
ambient temperature	-25 ... +85 °C		
● during operation			
● during storage	-40 ... +90 °C		
Installation/ mounting/ dimensions			
mounting position	any		
fastening method	screw fixing		
Certificates/ approvals			
General Product Approval		Functional Safety/Safety of Machinery	Declaration of Conformity



[Type Examination Certificate](#)



EG-Konf.

Declaration of Conformity	Test Certificates	other
---------------------------	-------------------	-------

[UK Declaration of Conformity](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5000-0AV02>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5000-0AV02>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE5000-0AV02>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE5000-0AV02&lang=en

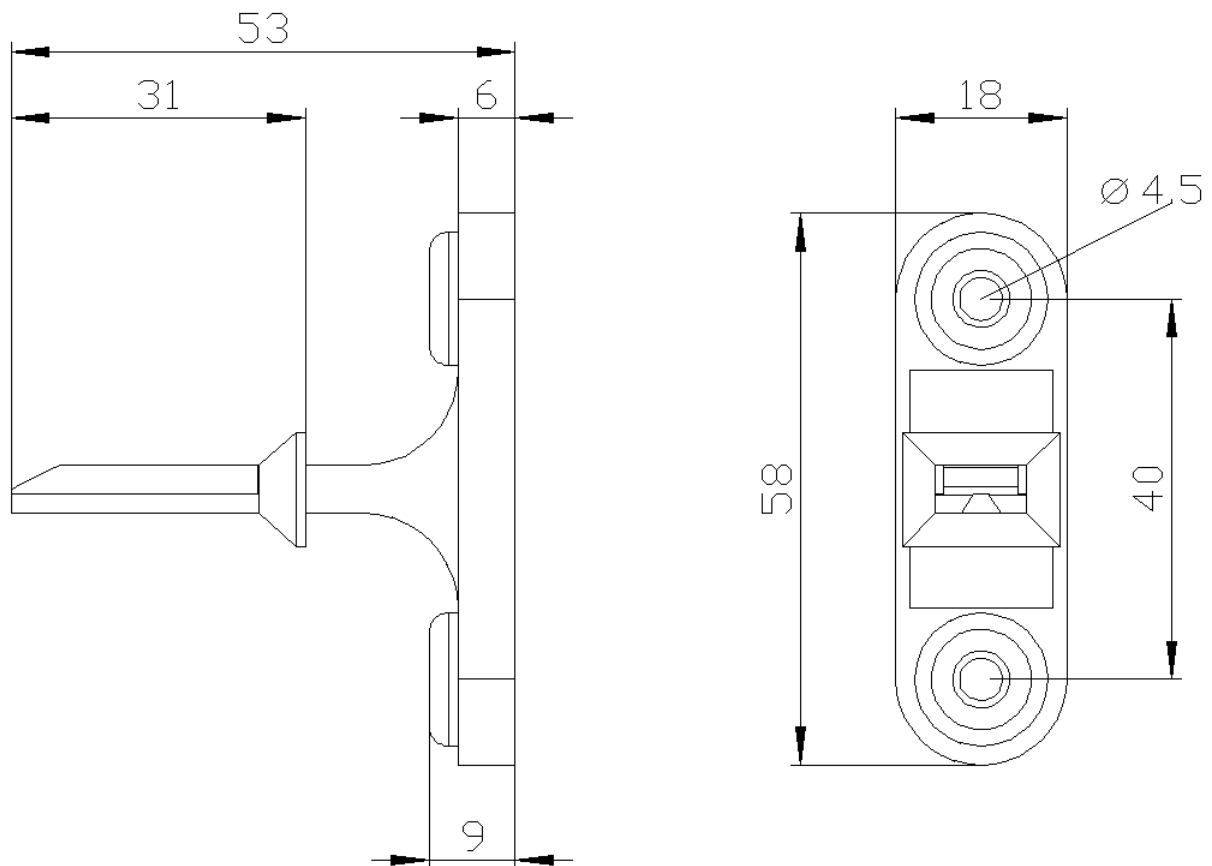

last modified:

12/23/2020 