



expansion module RS485, plug-in, for 7KM PAC3200 / 4200 / 3VA
COM100 / 800

Model				
product brand name		SETRON		
product designation		RS 485 expansion module		
type of voltage supply		via PAC 3200 / PAC4200 / COM100 / 800		
General technical data				
MTBF		222.3 y		
galvanic isolation		Maximum insulation voltage: 500V AC		
reference code / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750		P		
degree of pollution		2 according to IEC 61131		
Protection class				
protection class IP		IP20		
combustibility class acc. to UL 94		V 0		
suitability for use		No		
• reactive power meter				
Connections				
type of electrical connection		screw-type terminals		
Mechanical Design				
height		63 mm		
width		43 mm		
depth		22 mm		
fastening method		pluggable		
Environmental conditions				
ambient temperature / during operation		-5 °C 55 °C		
• minimum				
• maximum				
ambient temperature / during storage		-25 °C 70 °C		
• minimum				
• maximum				
Certificates				
reference code / acc. to DIN EN 61346-2		P		
General Product Approval		EMC	Declaration of Conformity	other

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7KM9300-0AM00-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/7KM9300-0AM00-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9300-0AM00-0AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

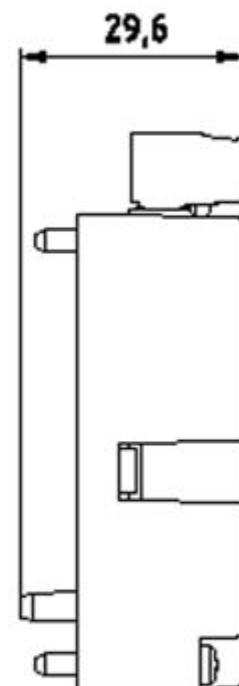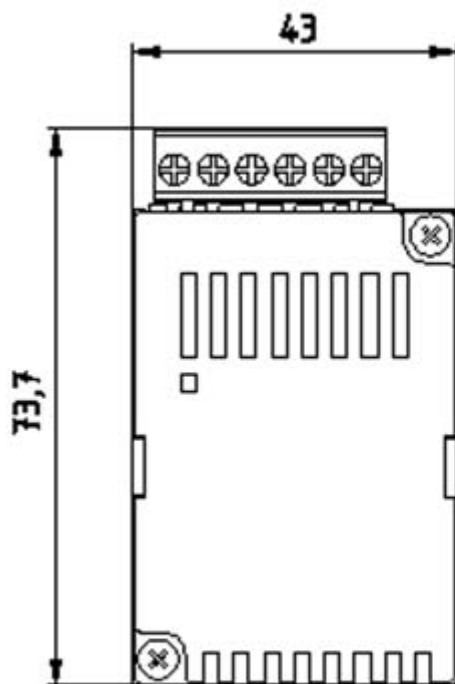

-P

