











Overload relay 3...12 A Electronic For motor protection Size S00, Class 5...30 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset Internal ground fault detection

| | |
|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| product brand name | SIRIUS |
| product designation | solid-state overload relay |
| product type designation | 3RB3 |
| General technical data | |
| size of overload relay | S00 |
| size of contactor can be combined company-specific | S00 |
| power loss [W] for rated value of the current at AC in hot operating state | 0.6 W |
| • per pole | 0.2 W |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation in networks with grounded star point | |
| • between auxiliary and auxiliary circuit | 300 V |
| • between auxiliary and auxiliary circuit | 300 V |
| • between main and auxiliary circuit | 600 V |
| • between main and auxiliary circuit | 690 V |
| shock resistance | 15g / 11 ms |
| • acc. to IEC 60068-2-27 | 15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 9g / 11 ms |
| vibration resistance | 1-6 Hz, 15 mm; 6-500 Hz, 20 m/s ² ; 10 cycles |
| thermal current | 12 A |
| recovery time after overload trip | |
| • with automatic reset typical | 3 min |
| • with remote-reset | 0 min |
| • with manual reset | 0 min |
| type of protection according to ATEX directive 2014/34/EU | Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p] |
| certificate of suitability according to ATEX directive 2014/34/EU | PTB 09 ATEX 3001 |
| reference code acc. to IEC 81346-2 | F |
| Substance Prohibition (Date) | 01.10.2009 00:00:00 |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -40 ... +80 °C |
| • during transport | -40 ... +80 °C |
| temperature compensation | -25 ... +60 °C |

| | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| relative humidity during operation | 10 ... 95 % |
| Main circuit | |
| number of poles for main current circuit | 3 |
| adjustable current response value current of the current-dependent overload release | 3 ... 12 A |
| operating voltage <ul style="list-style-type: none"> rated value for remote-reset function at DC at AC-3 rated value maximum | 690 V 24 V 690 V |
| operating frequency rated value | 50 ... 60 Hz |
| operational current rated value | 12 A |
| operating power <ul style="list-style-type: none"> for 3-phase motors at 400 V at 50 Hz for AC motors at 500 V at 50 Hz for AC motors at 690 V at 50 Hz | 1.5 ... 5.5 kW 1.5 ... 5.5 kW 2.2 ... 7.5 kW |
| Auxiliary circuit | |
| design of the auxiliary switch | integrated |
| number of NC contacts for auxiliary contacts <ul style="list-style-type: none"> note | 1 for contactor disconnection |
| number of NO contacts for auxiliary contacts <ul style="list-style-type: none"> note | 1 for message "tripped" |
| number of CO contacts for auxiliary contacts | 0 |
| operational current of auxiliary contacts at AC-15 <ul style="list-style-type: none"> at 24 V at 110 V at 120 V at 125 V at 230 V | 4 A 4 A 4 A 4 A 3 A |
| operational current of auxiliary contacts at DC-13 <ul style="list-style-type: none"> at 24 V at 60 V at 110 V at 125 V at 220 V | 2 A 0.55 A 0.3 A 0.3 A 0.11 A |
| Protective and monitoring functions | |
| trip class | CLASS 5E, 10E, 20E and 30E adjustable |
| design of the overload release | electronic |
| response value current of the grounding protection minimum | 0.75 x IMotor |
| response time of the grounding protection in settled state | 1 000 ms |
| operating range of the grounding protection relating to current set value <ul style="list-style-type: none"> minimum maximum | IMotor > lower current setting value IMotor < upper current setting value x 3.5 |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor <ul style="list-style-type: none"> at 480 V rated value at 600 V rated value | 12 A 12 A |
| contact rating of auxiliary contacts according to UL | B600 / R300 |
| Short-circuit protection | |
| design of the fuse link <ul style="list-style-type: none"> for short-circuit protection of the main circuit <ul style="list-style-type: none"> with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required | gG: 50 A, RK5: 45 A gG: 50 A, J: 45 A fuse gG: 6 A |
| Installation/ mounting/ dimensions | |
| mounting position | any |

| | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| fastening method | Contactor mounting | |
| height | 79 mm | |
| width | 45 mm | |
| depth | 73 mm | |
| Connections/ Terminals | | |
| product component removable terminal for auxiliary and control circuit | Yes | |
| type of electrical connection <ul style="list-style-type: none">for main current circuitfor auxiliary and control circuit | screw-type terminals screw-type terminals | |
| arrangement of electrical connectors for main current circuit | Top and bottom | |
| type of connectable conductor cross-sections <ul style="list-style-type: none">for main contacts<ul style="list-style-type: none">solidsolid or strandedfinely stranded with core end processingat AWG cables for main contacts | 1x (0.5 ... 4 mm²), 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 4 mm²) 1x (0,5 ... 4 mm²), 2x (0,5 ... 1,5 mm²), 2x (0,75 ... 4 mm²) 1x (0.5 ... 2.5 mm²), 2x (0.5 ... 2.5 mm²) 1x (20 ... 12), 2x (20 ... 12) | |
| type of connectable conductor cross-sections <ul style="list-style-type: none">for auxiliary contacts<ul style="list-style-type: none">solidsolid or strandedfinely stranded with core end processingat AWG cables for auxiliary contacts | 1x (0.5 ... 4 mm²), 2x (0.5 ... 2.5 mm²) 1x (0,5 ... 4 mm²), 2x (0,5 ... 2,5 mm²) 1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.5 mm²) 1x (20 ... 14), 2x (20 ... 14) | |
| tightening torque <ul style="list-style-type: none">for main contacts with screw-type terminalsfor auxiliary contacts with screw-type terminals | 0.8 ... 1.2 N·m 0.8 ... 1.2 N·m | |
| design of screwdriver shaft | Diameter 5 to 6 mm | |
| size of the screwdriver tip | Pozidriv PZ 2 | |
| design of the thread of the connection screw <ul style="list-style-type: none">for main contactsof the auxiliary and control contacts | M3 M3 | |
| Safety related data | | |
| protection class IP on the front acc. to IEC 60529 | IP20 | |
| touch protection on the front acc. to IEC 60529 | finger-safe, for vertical contact from the front | |
| Communication/ Protocol | | |
| type of voltage supply via input/output link master | No | |
| Electromagnetic compatibility | | |
| conducted interference <ul style="list-style-type: none">due to burst acc. to IEC 61000-4-4due to conductor-earth surge acc. to IEC 61000-4-5due to conductor-conductor surge acc. to IEC 61000-4-5due to high-frequency radiation acc. to IEC 61000-4-6 | 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 2 kV (line to earth) corresponds to degree of severity 3 1 kV (line to line) corresponds to degree of severity 3 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz | |
| field-based interference acc. to IEC 61000-4-3 | 10 V/m | |
| electrostatic discharge acc. to IEC 61000-4-2 | 6 kV contact discharge / 8 kV air discharge | |
| Display | | |
| display version for switching status | Slide switch | |
| Certificates/ approvals | | |
| General Product Approval | EMC | For use in hazardous locations |



| Declaration of Conformity | Test Certificates | Marine / Shipping |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  EG-Konf. | Special Test Certificate Type Test Certificates/Test Report |  ABS  BUREAU VERITAS  LRS |
| Marine / Shipping | other | |
|  PRS  RINA  RMRS  DNV GL | Confirmation | |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3113-4SB0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3113-4SB0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3113-4SB0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3113-4SB0&lang=en


Characteristic: Tripping characteristics, I_t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RB3113-4SB0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3113-4SB0&objecttype=14&gridview=view1>

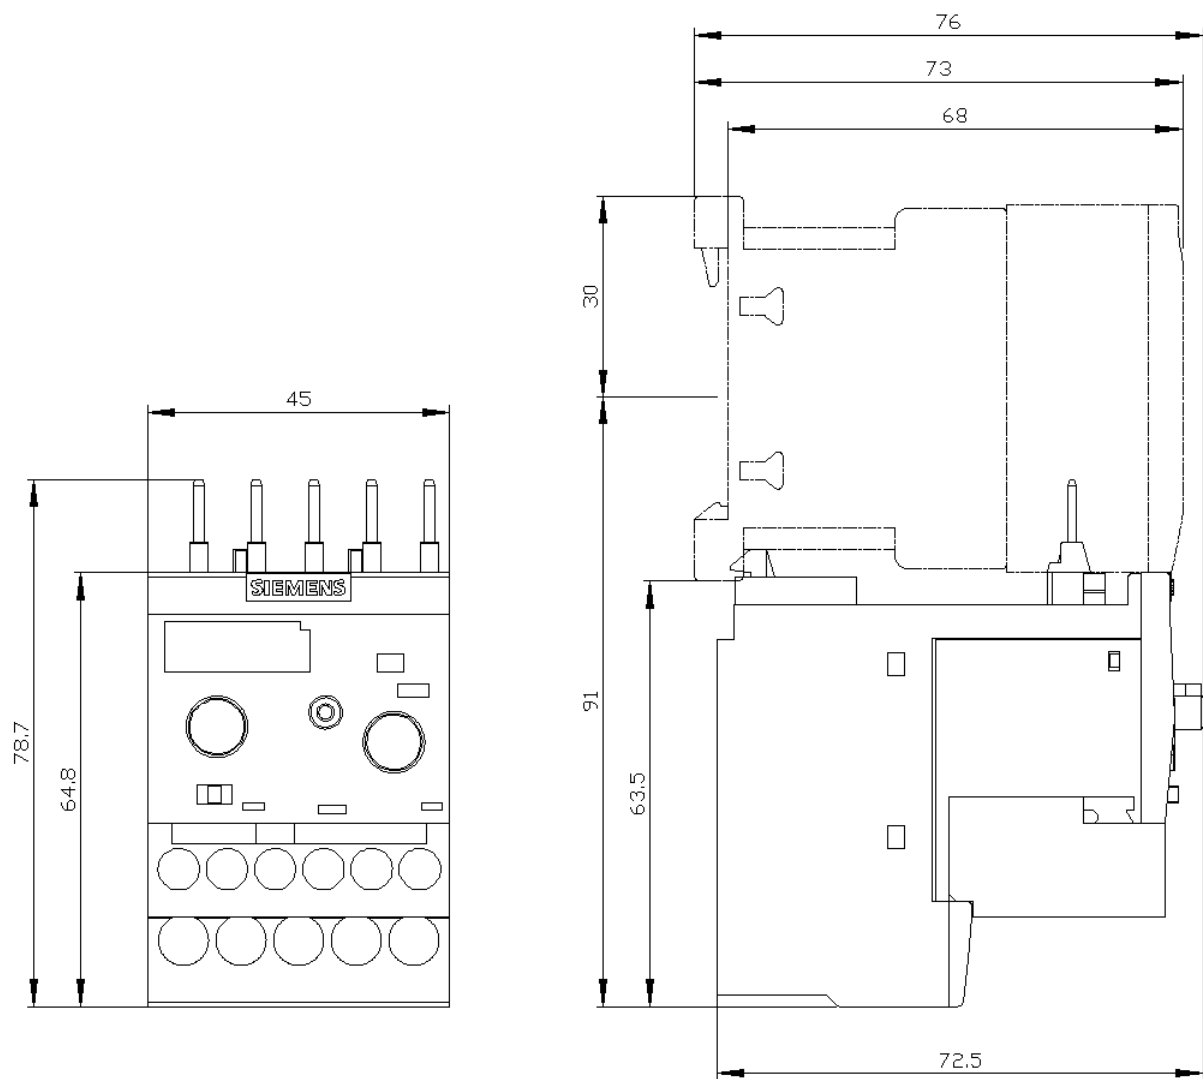

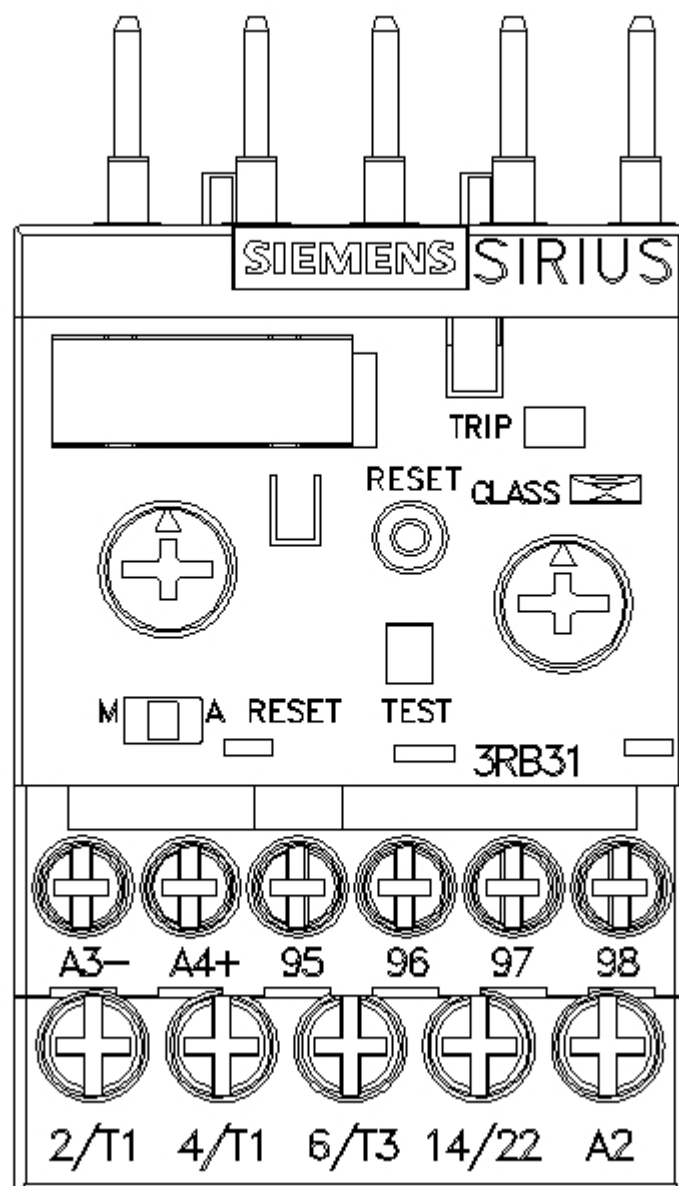

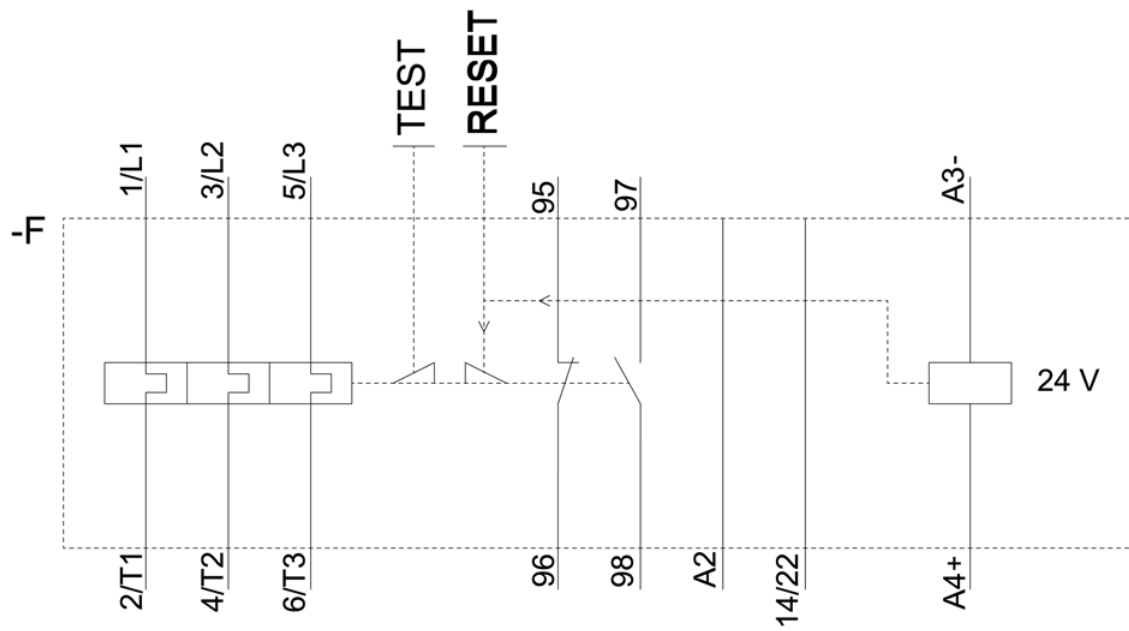

last modified:

12/15/2020 