



Basic unit SIMOCODE pro V PN, Ethernet/PROFINET IO, PN system redundancy, OPC UA server, Web server, transmission rate 100 Mbps, 2 x bus connection via RJ45, 4I/3O freely parameterizable, Us: 24 V DC, input for thermistor connection Monostable relay outputs, expandable by extension modules

| | |
|--|--------------------------------|
| product brand name | SIRIUS |
| product designation | Motor management system |
| design of the product | basic unit 3 |
| product type designation | SIMOCODE pro V PN |
| General technical data | |
| product function | |
| • bus communication | Yes |
| • data acquisition function | Yes |
| • diagnostics function | Yes |
| • password protection | Yes |
| • test function | Yes |
| • maintenance function | Yes |
| product component | |
| • input for thermistor connection | Yes |
| • digital input | Yes |
| • input for analog temperature sensors | No |
| • input for ground fault detection | No |
| • relay output | Yes |
| product extension | |
| • temperature monitoring module | Yes |
| • current measuring module | Yes |
| • current/voltage measuring module | Yes |
| • fail-safe digital I/O module | Yes |
| • ground-fault monitoring module | Yes |
| • control unit with display | Yes |
| • control unit | Yes |
| • analog I/O module | Yes |
| consumed active power | 3.9 W |
| insulation voltage with degree of pollution 3 at AC rated value | 300 V |
| surge voltage resistance rated value | 4 000 V |
| protection class IP | IP20 |
| shock resistance | |
| • acc. to IEC 60068-2-27 | 15g / 11 ms |
| • vibration resistance | 1-6 Hz / 15 mm; 6-500 Hz / 2 g |
| switching capacity current of the NO contacts of the relay outputs at AC-15 | |
| • at 24 V | 6 A |

| | |
|---|--|
| <ul style="list-style-type: none"> • at 120 V • at 230 V | 6 A 3 A |
| switching capacity current of the NO contacts of the relay outputs at DC-13 | |
| <ul style="list-style-type: none"> • at 24 V • at 60 V • at 125 V | 2 A 0.55 A 0.25 A |
| mechanical service life (switching cycles) typical | 10 000 000 |
| electrical endurance (switching cycles) typical | 100 000 |
| buffering time in the event of power failure | 0.02 s |
| reference code acc. to IEC 81346-2 | F |
| continuous current of the NO contacts of the relay outputs | |
| <ul style="list-style-type: none"> • at 50 °C • at 60 °C | 6 A 5 A |
| type of input characteristic | Type 1 in accordance with EN 61131-2 |
| Substance Prohibition (Date) | 01.03.2017 00:00:00 |
| certificate of suitability | |
| <ul style="list-style-type: none"> • IECEx • according to ATEX directive 2014/34/EU | Yes; IECEx PTB 18.0004X BVS 06 ATEX F001, PTB 18 ATEX 5003 X |
| explosion device group and category according to ATEX directive 2014/34/EU | II (2) G, II (2) D, I (M2) / I (1G/M2), II (1/2) G, II (1G/2D) |
| Electromagnetic compatibility | |
| EMC emitted interference acc. to IEC 60947-1 | class A |
| EMC immunity acc. to IEC 60947-1 | corresponds to degree of severity 3 |
| conducted interference | |
| <ul style="list-style-type: none"> • due to burst acc. to IEC 61000-4-4 • due to conductor-earth surge acc. to IEC 61000-4-5 • due to conductor-conductor surge acc. to IEC 61000-4-5 • due to high-frequency radiation acc. to IEC 61000-4-6 | 2 kV (power ports) / 1 kV (signal ports) 2 kV 1 kV 10 V |
| field-based interference acc. to IEC 61000-4-3 | 10 V/m |
| electrostatic discharge acc. to IEC 61000-4-2 | 6 kV contact discharge / 8 kV air discharge |
| conducted HF interference emissions acc. to CISPR11 | corresponds to degree of severity A |
| field-bound HF interference emission acc. to CISPR11 | corresponds to degree of severity A |
| Inputs/ Outputs | |
| product function | |
| <ul style="list-style-type: none"> • parameterizable inputs • parameterizable outputs | Yes Yes |
| number of inputs | 4 |
| <ul style="list-style-type: none"> • for thermistor connection | 1 |
| number of digital inputs with a common reference potential | 4 |
| digital input version type 1 acc. to IEC 61131 | Yes |
| input voltage at digital input at DC rated value | 24 V |
| number of outputs | 3 |
| number of semiconductor outputs | 0 |
| number of outputs as contact-affected switching element | 3 |
| switching behavior | monostable |
| type of relay outputs | Monostable |
| wire length for digital signals maximum | 300 m |
| wire length for thermistor connection | |
| <ul style="list-style-type: none"> • with conductor cross-section = 0.5 mm² maximum • with conductor cross-section = 1.5 mm² maximum • with conductor cross-section = 2.5 mm² maximum | 50 m 150 m 250 m |
| Protective and monitoring functions | |
| product function | |
| <ul style="list-style-type: none"> • asymmetry detection • blocking current evaluation | Yes Yes |

| | |
|--|--------------------------|
| • power factor monitoring | Yes |
| • ground fault detection | Yes |
| • phase failure detection | Yes |
| • phase sequence recognition | Yes |
| • voltage detection | Yes |
| • monitoring of number of start operations | Yes |
| • overvoltage detection | Yes |
| • overcurrent detection 1 phase | Yes |
| • undervoltage detection | Yes |
| • undercurrent detection 1 phase | Yes |
| • active power monitoring | Yes |
| product function | |
| • current detection | Yes |
| • overload protection | Yes |
| • evaluation of thermistor motor protection | Yes |
| total cold resistance number of sensors in series maximum | 1.5 k Ω |
| response value of thermoresistor | 3 400 ... 3 800 Ω |
| • of the short-circuit control | 9 Ω |
| release value of thermoresistor | 1 500 ... 1 650 Ω |
| Motor control functions | |
| product function | |
| • parameterizable overload relay | Yes |
| • circuit breaker control | Yes |
| • direct start | Yes |
| • reverse starting | Yes |
| • star-delta circuit | Yes |
| • star-delta reversing circuit | Yes |
| • Dahlander circuit | Yes |
| • Dahlander reversing circuit | Yes |
| • pole-changing switch circuit | Yes |
| • pole-changing switch reversing circuit | Yes |
| • slide control | Yes |
| • valve control | Yes |
| Communication/ Protocol | |
| • protocol is supported PROFIBUS DP protocol | No |
| • protocol is supported PROFINET IO protocol | Yes |
| • protocol is supported PROFI-safe protocol | Yes |
| • protocol is supported Modbus RTU | No |
| • protocol is supported EtherNet/IP | No |
| • protocol is supported OPC UA Server | Yes |
| • protocol is supported LLDP | Yes |
| • protocol is supported Address Resolution Protocol (ARP) | Yes |
| • protocol is supported SNMP | Yes |
| • protocol is supported HTTPS | Yes |
| • protocol is supported NTP | Yes |
| • protocol is supported Media Redundancy Protocol (MRP) | Yes |
| • product function is supported Device Level Ring (DLR) | No |
| number of interfaces | |
| • acc. to PROFINET | 2 |
| • acc. to PROFIBUS | 0 |
| • according to Ethernet/IP | 0 |
| product function | |
| • web server | Yes |
| • shared device | Yes |
| • at the Ethernet interface Autocrossover | Yes |

| | |
|--|---|
| <ul style="list-style-type: none"> • at the Ethernet interface Autonegotiation | Yes |
| <ul style="list-style-type: none"> • at the Ethernet interface Autosensing | Yes |
| <ul style="list-style-type: none"> • Media Redundancy Protocol for Planned Duplication (MRPD) | Yes |
| <ul style="list-style-type: none"> • is supported PROFINET system redundancy | Yes; In conjunction with SIMATIC PCS 7 CPU 410-5H |
| <ul style="list-style-type: none"> • supports PROFINergy measured values | Yes |
| <ul style="list-style-type: none"> • supports PROFINergy shutdown | Yes |
| transfer rate maximum | 100 Mbit/s |
| PROFINET conformity class | B |
| identification & maintenance function | |
| <ul style="list-style-type: none"> • I&M0 - device-specific information | Yes |
| <ul style="list-style-type: none"> • I&M1 – higher level designation/location designation | Yes |
| <ul style="list-style-type: none"> • I&M2 - installation date | Yes |
| <ul style="list-style-type: none"> • I&M3 - comment | Yes |
| type of electrical connection of the communication interface | 2x RJ45 |
| Installation/ mounting/ dimensions | |
| mounting position | any |
| fastening method | screw and snap-on mounting |
| height | 111 mm |
| width | 45 mm |
| depth | 124 mm |
| required spacing | |
| <ul style="list-style-type: none"> • top | 40 mm |
| <ul style="list-style-type: none"> • bottom | 40 mm |
| <ul style="list-style-type: none"> • left | 0 mm |
| <ul style="list-style-type: none"> • right | 0 mm |
| Connections/ Terminals | |
| product component removable terminal for auxiliary and control circuit | Yes |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • solid | 1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²) |
| <ul style="list-style-type: none"> • finely stranded with core end processing | 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> • at AWG cables solid | 1x (20 ... 12), 2x (20 ... 14) |
| <ul style="list-style-type: none"> • at AWG cables stranded | 1x (20 ... 14), 2x (20 ... 16) |
| tightening torque with screw-type terminals | 0.8 ... 1.2 N·m |
| tightening torque [lbf·in] with screw-type terminals | 7 ... 10.3 lbf·in |
| Ambient conditions | |
| installation altitude at height above sea level | |
| <ul style="list-style-type: none"> • 1 maximum | 2 000 m |
| <ul style="list-style-type: none"> • 2 maximum | 3 000 m; max. +50 °C (no protective separation) |
| <ul style="list-style-type: none"> • 3 maximum | 4 000 m; max. +40 °C (no protective separation) |
| ambient temperature | |
| <ul style="list-style-type: none"> • during operation | -25 ... +60 °C |
| <ul style="list-style-type: none"> • during storage | -40 ... +80 °C |
| <ul style="list-style-type: none"> • during transport | -40 ... +80 °C |
| environmental category | |
| <ul style="list-style-type: none"> • during operation acc. to IEC 60721 | 3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| <ul style="list-style-type: none"> • during storage acc. to IEC 60721 | 1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4 |
| <ul style="list-style-type: none"> • during transport acc. to IEC 60721 | 2K2, 2C1, 2S1, 2M2 |
| relative humidity | |
| <ul style="list-style-type: none"> • during operation | 5 ... 95 % |
| contact rating of auxiliary contacts according to UL | B300 / R300 |
| Short-circuit protection | |
| design of short-circuit protection per output | Fuse links: gG 6 A, quick-response 10 A (IEC 60947-5-1), miniature circuit-breaker C char.: 1.6 A (IEC 60947-5-1) or 6 A (I _K < 500 A) |
| Safety related data | |

| | |
|--|--|
| touch protection against electrical shock | finger-safe |
| Galvanic isolation | |
| (electrically) protective separation acc. to IEC 60947-1 | All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information) |

| | |
|---|------|
| Control circuit/ Control | |
| product function soft starter control | Yes |
| type of voltage of the control supply voltage | DC |
| control supply voltage at DC | |
| • rated value | 24 V |
| control supply voltage 1 at DC rated value | 24 V |
| operating range factor control supply voltage rated value at DC | |
| • initial value | 0.85 |
| • full-scale value | 1.2 |

| | | |
|--------------------------------|-----|--------------------------------|
| Certificates/ approvals | | |
| General Product Approval | EMC | For use in hazardous locations |



| | | |
|--------------------------------|---------------------------|-------------------|
| For use in hazardous locations | Declaration of Conformity | Test Certificates |
|--------------------------------|---------------------------|-------------------|



| | |
|-------------------|-------------------|
| Test Certificates | Marine / Shipping |
|-------------------|-------------------|






other



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7011-1AB00-0>
 Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7011-1AB00-0>
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3UF7011-1AB00-0>
 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7011-1AB00-0&lang=en
 Test report No. A0258, protective separation
<https://support.industry.siemens.com/cs/ww/en/view/109748152>

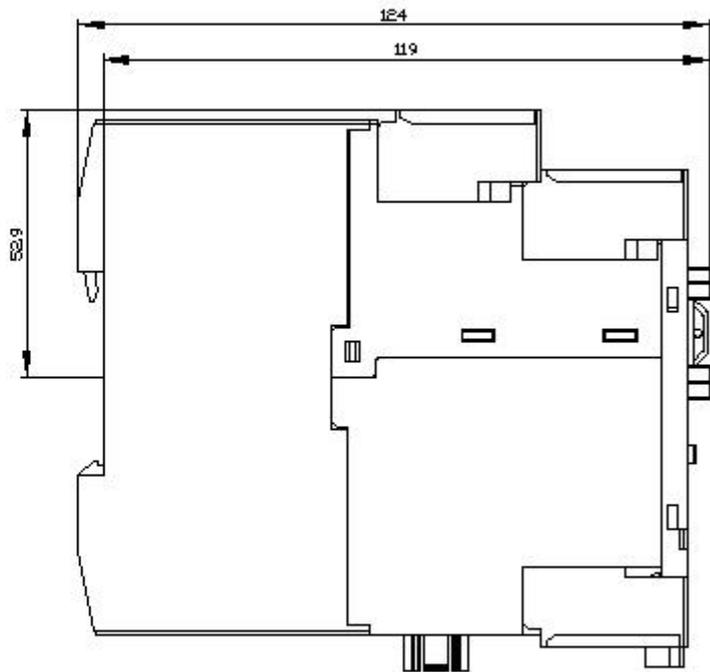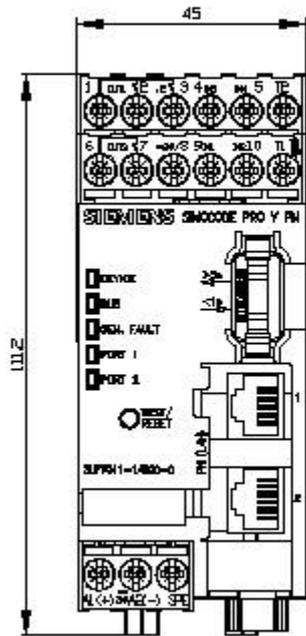

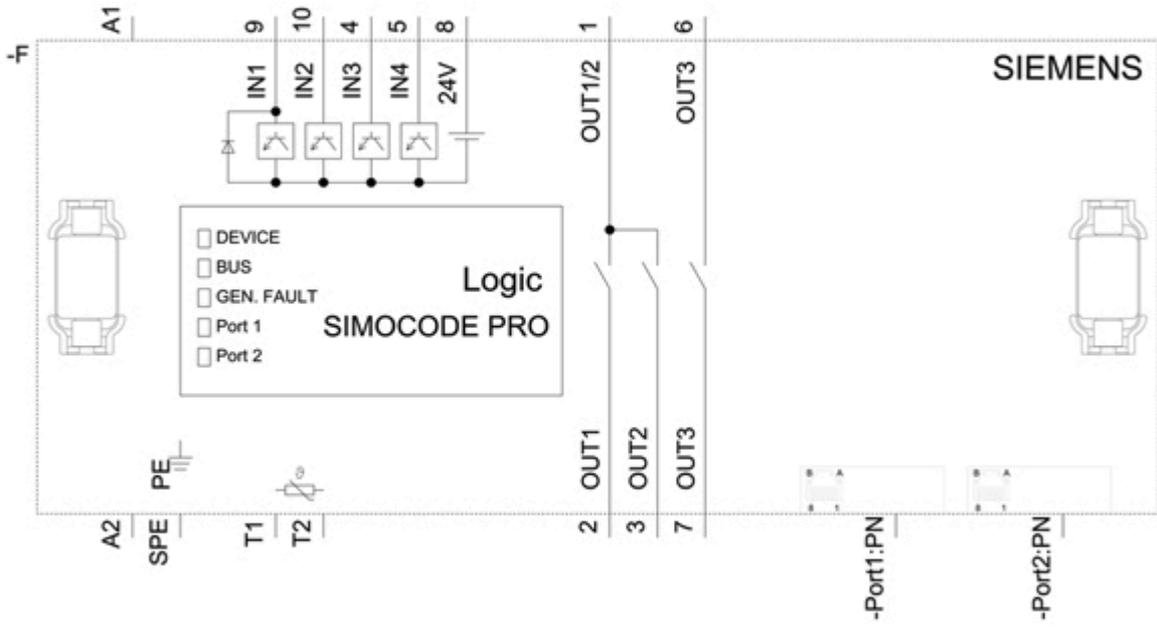

last modified:

12/23/2020