

Solenoid rectangular small



product brand name	SIRIUS
product designation	Magnetically operated switch
design of the product	Coded magnet, rectangular
product type designation	3SE67
suitability for use safety-related circuits	Yes
General technical data	
product function	
• positive opening	No
• cross-circuit/short-circuit recognition	No
protection class IP	IP67
reference code acc. to IEC 81346-2	S
Substance Prohibance (Date)	01.07.2006 00:00:00
height of the sensor	13 mm
length of the sensor	33 mm
width of the sensor	25 mm
mechanical installation condition for sensor	no flush installation possible
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
Enclosure	
design of the housing	block
material of the enclosure	plastic
Contact	
switching frequency	5 Hz
Safety related data	
Safety Integrity Level (SIL) acc. to IEC 61508	3
performance level (PL) acc. to EN ISO 13849-1	e
category acc. to EN 954-1	4
Ambient conditions	
ambient temperature during operation	-25 ... +70 °C
Inputs/ Outputs	
type of switching output	Reed contacts
Display	
evaluation unit required	yes
Installation/ mounting/ dimensions	
fastening method	screw fixing
Certificates/ approvals	



[UK Declaration of
Conformity](#)



other

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE6704-3BA>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE6704-3BA>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE6704-3BA>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE6704-3BA&lang=en

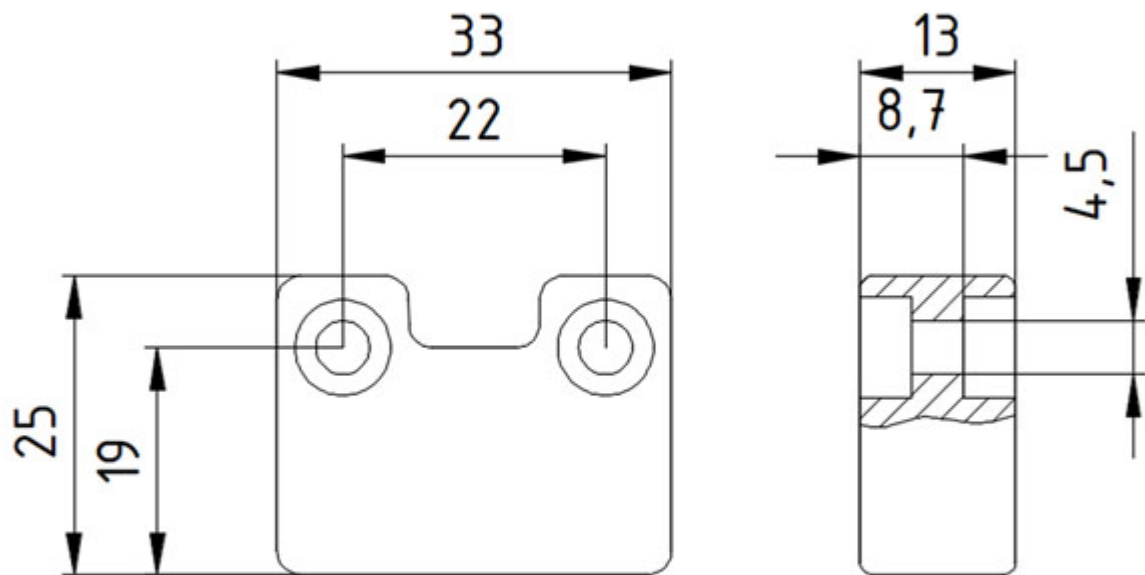

last modified:

12/23/2020 