



Integrated signal lamp, continuous light, green, 12-230 V AC/DC, Diameter 70 mm

General technical data			
product designation		Continuous light element	
type of voltage of the operating voltage		AC/DC	
operating voltage			
• at DC rated value		12 ... 230 V	
• at AC at 50 Hz rated value		12 ... 230 V	
• at AC at 60 Hz rated value		12 ... 230 V	
relative positive tolerance of the operating voltage		10 %	
relative negative tolerance of the operating voltage		-10 %	
consumed active power		5 W	
reference code acc. to IEC 81346-2		P	
fastening method		Bayonet / flush mounting	
material		PC; PC/ABS; PA	
color		green	
Mechanical data			
product component light source		No	
type of electrical connection		screw-type terminals	
outer diameter of the signal column element		75 mm	
Lamp			
socket design		BA 15d	
design of the optical signal		continuous light	
type of light source		filament lamp / LED	
Ambient conditions			
ambient temperature during operation		-20 ... +60 °C	
protection class IP		IP65	
depth		31 mm	
height		66 mm	
width		75 mm	
Certificates/ approvals			
General Product Approval		EMC	Declaration of Conformity
			other



[Miscellaneous](#)



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD5300-1AC>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD5300-1AC>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD5300-1AC>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD5300-1AC&lang=en

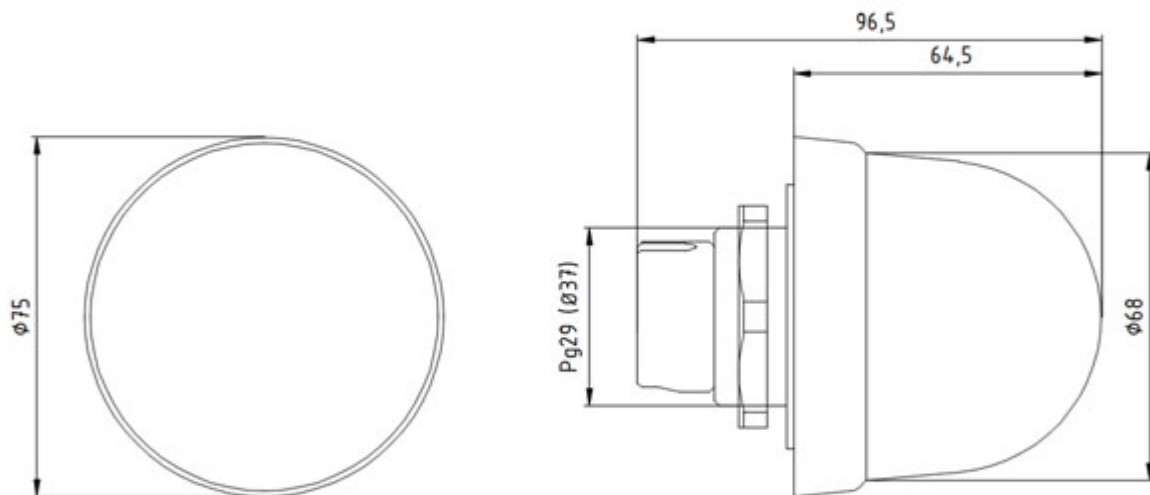

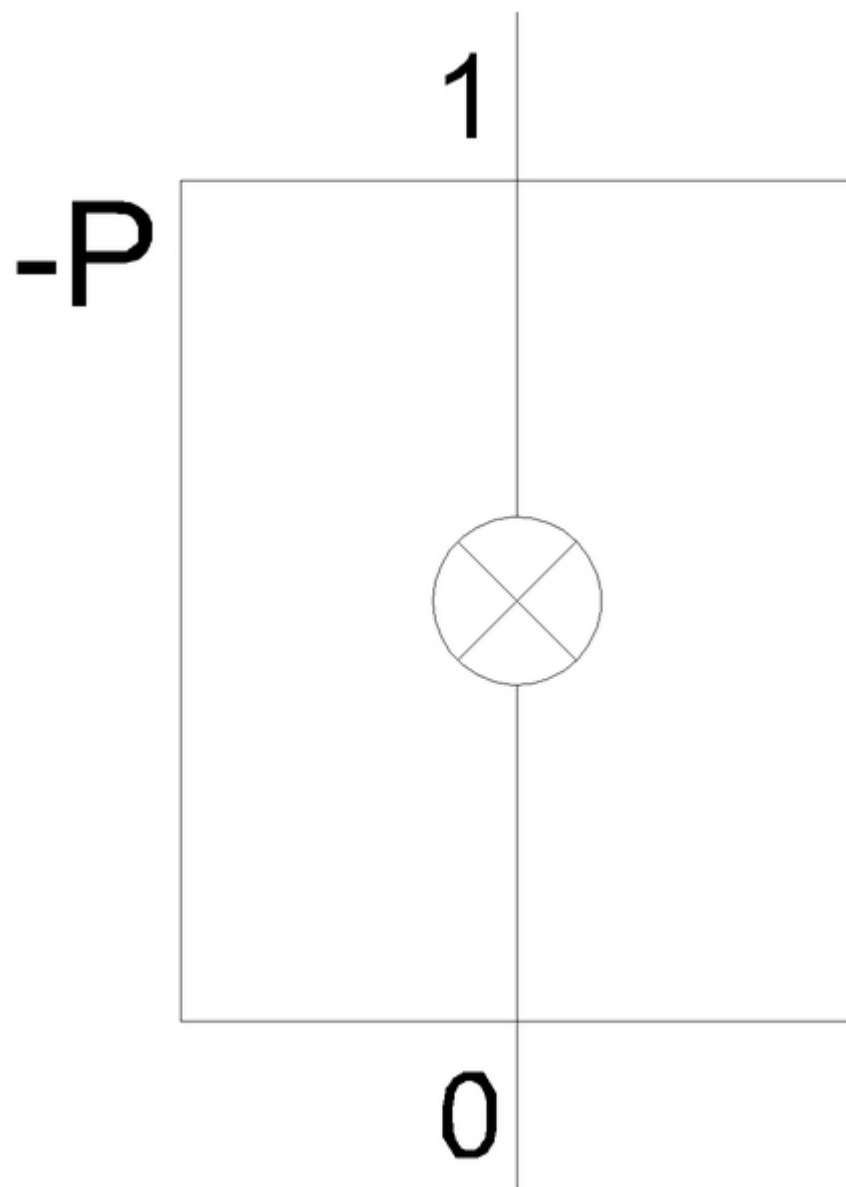

last modified:

2/25/2021 [🔗](#)