



Single-flash light element, w. built-in electronic flash, red, 115 V AC,
Diameter 70 mm

General technical data			
product brand name		SIRIUS	
product designation		Flashlight element	
design of the optical signal		flash light	
type of voltage of the operating voltage		AC	
operating voltage		115 V 115 V	
• 1 at AC at 50 Hz rated value			
• 1 at AC at 60 Hz rated value			
relative positive tolerance of the operating voltage		10 %	
relative negative tolerance of the operating voltage		-10 %	
material		PC	
color		red	
fastening method		Bayonet	
reference code		P P	
• acc. to DIN EN 61346-2			
• acc. to IEC 81346-2			
Mechanical data			
outer diameter of the signal column element		70 mm	
Lamp			
product component light source		Yes	
type of light source		Xenon gas discharge lamp	
flash frequency		1 Hz	
number of flashes of light element		4 000 000	
light intensity		11 507 cd	
Ambient conditions			
ambient temperature during operation		-20 ... +50 °C	
protection class IP		IP65	
height		65.5 mm	
width		70 mm	
Certificates/ approvals			
General Product Approval		EMC	Declaration of Conformity
			other



[UK Declaration of
Conformity](#)



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4440-0CB>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4440-0CB>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4440-0CB>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4440-0CB&lang=en

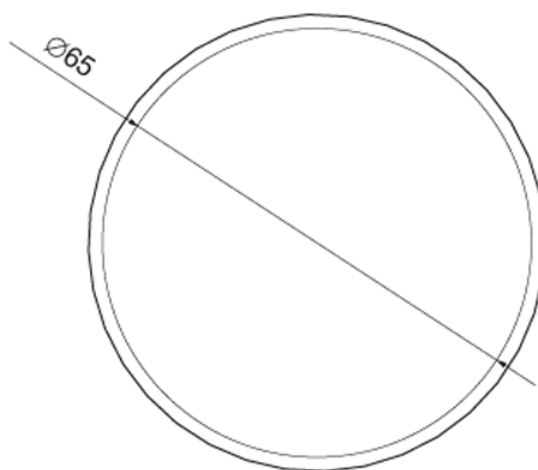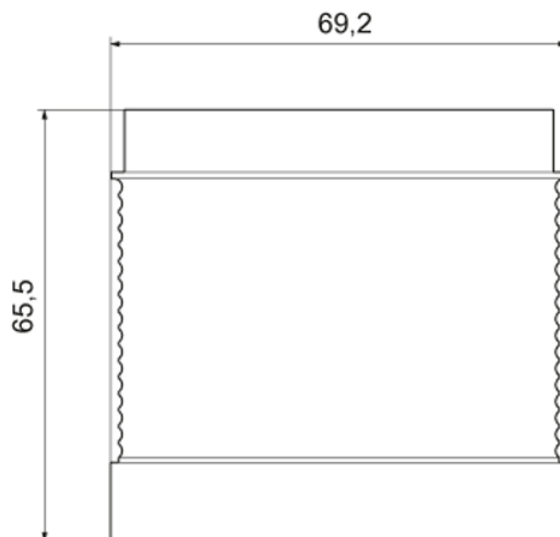

-P

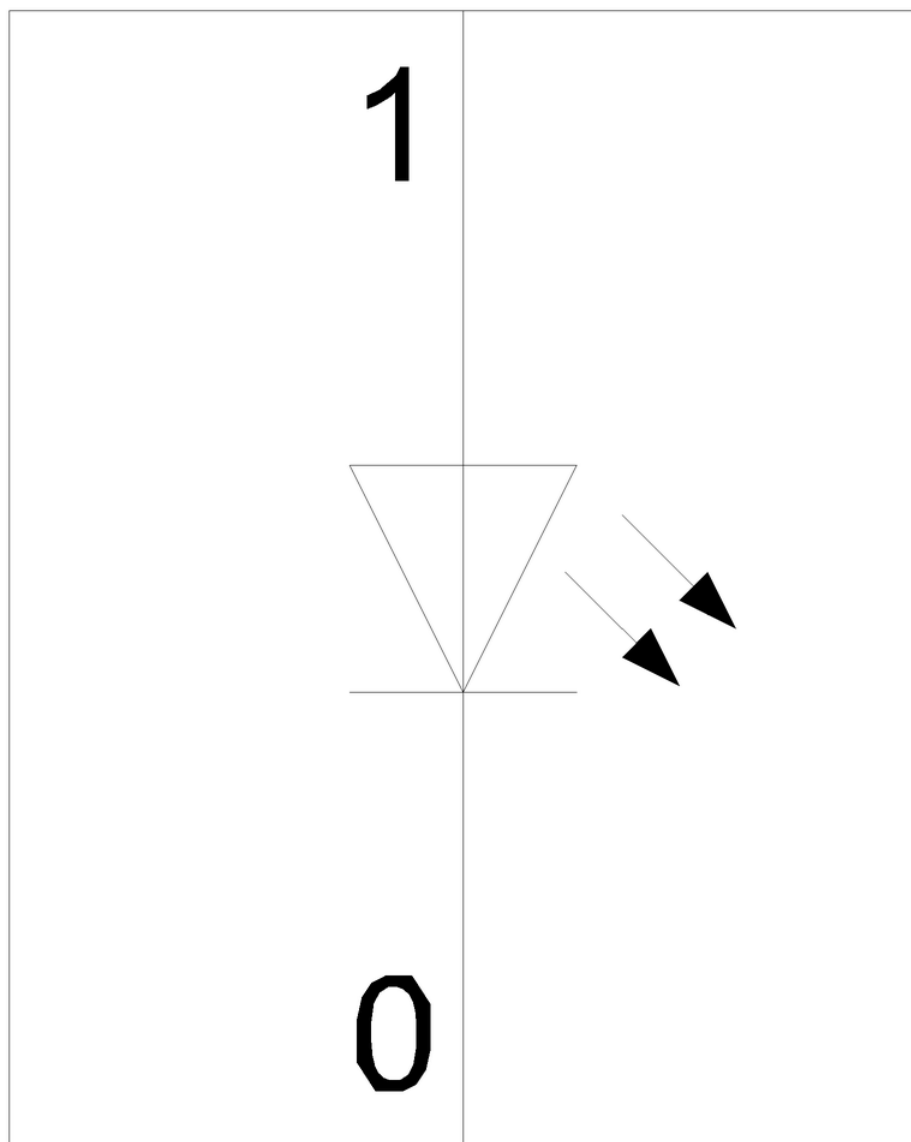

last modified:

12/23/2020 