



Continuous light element, clear, 12-230 V AC/DC, 70 mm diameter, base BA 15d without light element

General technical data				
product brand name		SIRIUS		
product designation		Continuous light element		
design of the optical signal		continuous light		
type of voltage of the operating voltage		AC/DC		
operating voltage		12 ... 230 V 12 ... 230 V 12 ... 230 V		
• at DC rated value				
• at AC at 50 Hz rated value				
• at AC at 60 Hz rated value				
material		PC		
color		clear		
fastening method		Bayonet		
reference code		P P		
• acc. to DIN EN 61346-2				
• acc. to IEC 81346-2				
Mechanical data				
outer diameter of the signal column element		70 mm		
Lamp				
product component light source		No		
type of light source		filament lamp / LED		
light intensity		1.31 cd		
light intensity		1.01 ... 1.78 cd		
socket design		BA 15d		
Ambient conditions				
ambient temperature during operation		-20 ... +60 °C		
protection class IP		IP65		
height		65.5 mm		
width		70 mm		
Certificates/ approvals				
General Product Approval		EMC	Declaration of Conformity	other



[UK Declaration of Conformity](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4400-1AE>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4400-1AE>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4400-1AE>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4400-1AE&lang=en

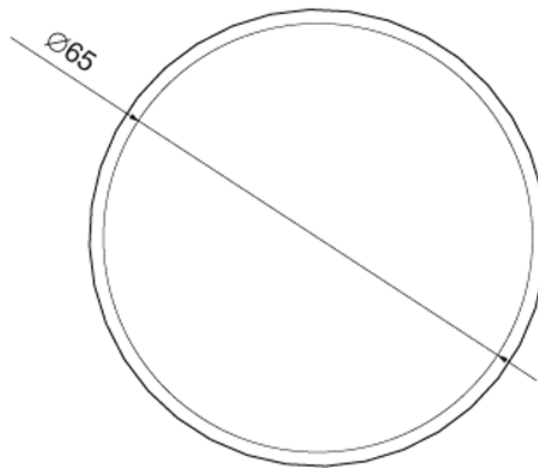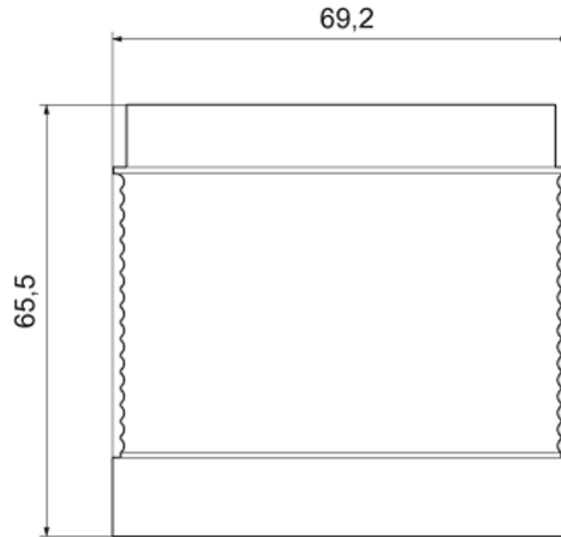

-P

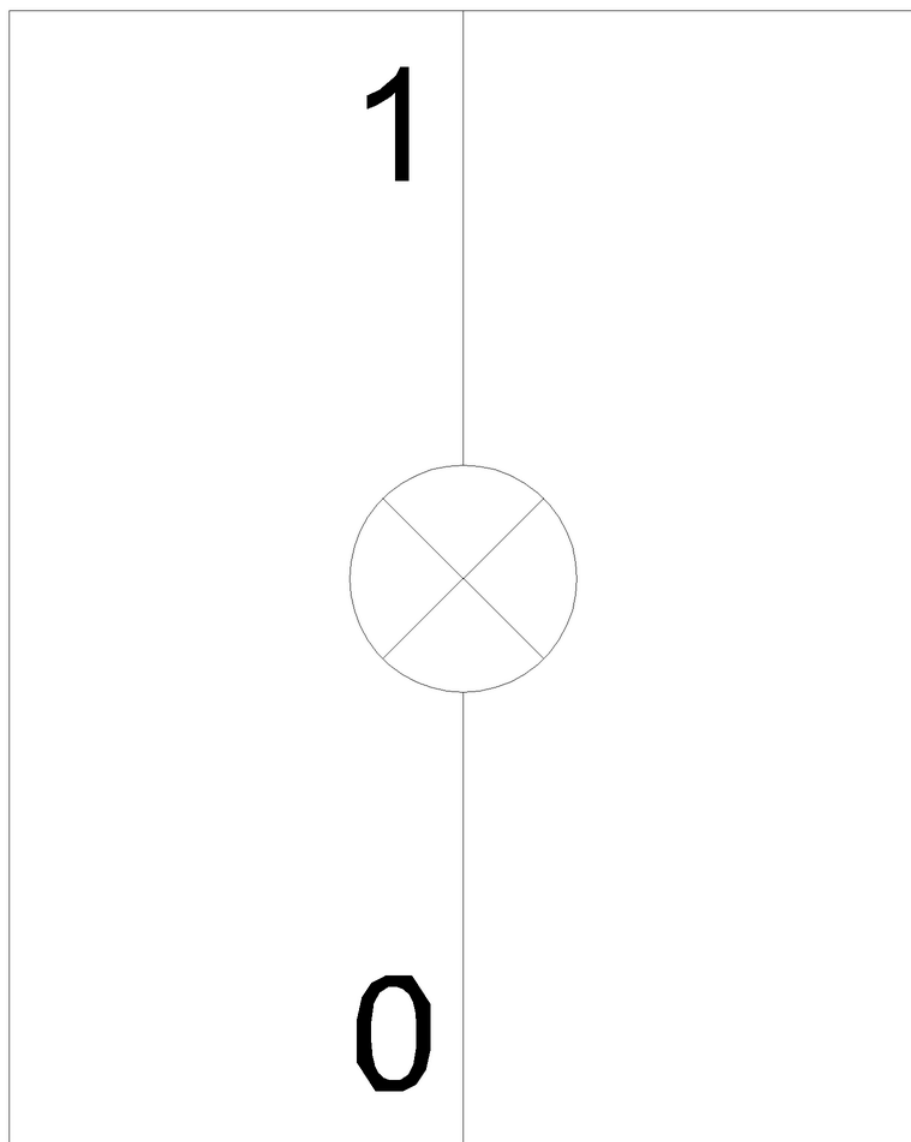

last modified:

2/25/2021 