



Illuminated pushbutton, 22 mm, round, plastic, blue, pushbutton, flat, momentary contact type, with holder, 1 NO, LED module with integrated LED 24 V AC/DC, screw terminal

|                                                 |                                    |
|-------------------------------------------------|------------------------------------|
| product brand name                              | SIRIUS ACT                         |
| product designation                             | Illuminated pushbuttons            |
| design of the product                           | Complete unit                      |
| product type designation                        | 3SU1                               |
| product line                                    | Plastic, black, 22 mm              |
| manufacturer's article number                   |                                    |
| • of supplied contact module at position 1      | <a href="#">3SU1400-1AA10-1BA0</a> |
| • of supplied LED module                        | <a href="#">3SU1401-1BB50-1AA0</a> |
| • of the supplied holder                        | <a href="#">3SU1500-0AA10-0AA0</a> |
| • of the supplied actuator                      | <a href="#">3SU1001-0AB50-0AA0</a> |
| number of command points                        | 1                                  |
| <b>Actuator</b>                                 |                                    |
| design of the actuating element                 | Button, flat                       |
| principle of operation of the actuating element | momentary contact type             |
| product extension optional light source         | Yes                                |
| color of the actuating element                  | blue                               |
| material of the actuating element               | plastic                            |
| shape of the actuating element                  | round                              |
| outer diameter of the actuating element         | 29.45 mm                           |
| number of contact modules                       | 1                                  |
| <b>Front ring</b>                               |                                    |
| product component front ring                    | Yes                                |
| design of the front ring                        | Standard                           |
| material of the front ring                      | plastic                            |
| color of the front ring                         | black                              |
| <b>Holder</b>                                   |                                    |
| material of the holder                          | Plastic                            |
| <b>Display</b>                                  |                                    |
| number of LED modules                           | 1                                  |
| <b>General technical data</b>                   |                                    |
| product function positive opening               | No                                 |
| product component light source                  | Yes                                |
| insulation voltage rated value                  | 320 V                              |
| degree of pollution                             | 3                                  |
| type of voltage of the operating voltage        | AC/DC                              |
| surge voltage resistance rated value            | 4 kV                               |
| protection class IP                             | IP66, IP67, IP69(IP69K)            |

|                                                           |                                                                                                                                           |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| • of the terminal                                         | IP20                                                                                                                                      |
| <b>degree of protection NEMA rating</b>                   | 1, 2, 3, 3R, 4, 4X, 12, 13                                                                                                                |
| <b>shock resistance</b>                                   |                                                                                                                                           |
| • acc. to IEC 60068-2-27                                  | sinusoidal half-wave 50g / 11 ms                                                                                                          |
| • for railway applications acc. to DIN EN 61373           | Category 1, Class B                                                                                                                       |
| <b>vibration resistance</b>                               |                                                                                                                                           |
| • acc. to IEC 60068-2-6                                   | 10 ... 500 Hz: 5g                                                                                                                         |
| • for railway applications acc. to DIN EN 61373           | Category 1, Class B                                                                                                                       |
| <b>operating frequency maximum</b>                        | 3 600 1/h                                                                                                                                 |
| mechanical service life (switching cycles) typical        | 3 000 000                                                                                                                                 |
| electrical endurance (switching cycles) typical           | 10 000 000                                                                                                                                |
| <b>thermal current</b>                                    | 10 A                                                                                                                                      |
| <b>reference code acc. to IEC 81346-2</b>                 | S                                                                                                                                         |
| <b>continuous current of the C characteristic MCB</b>     | 10 A; for a short-circuit current smaller than 400 A                                                                                      |
| <b>continuous current of the quick DIAZED fuse link</b>   | 10 A                                                                                                                                      |
| <b>continuous current of the DIAZED fuse link gG</b>      | 10 A                                                                                                                                      |
| Substance Prohibitance (Date)                             | 01.10.2014 00:00:00                                                                                                                       |
| <b>operating voltage</b>                                  |                                                                                                                                           |
| • at AC                                                   |                                                                                                                                           |
| — at 50 Hz rated value                                    | 5 ... 500 V                                                                                                                               |
| — at 60 Hz rated value                                    | 5 ... 500 V                                                                                                                               |
| • at DC rated value                                       | 5 ... 500 V                                                                                                                               |
| <b>Power Electronics</b>                                  |                                                                                                                                           |
| <b>contact reliability</b>                                | One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA)                                                |
| <b>Supply voltage</b>                                     |                                                                                                                                           |
| type of voltage of the supply voltage of the light source | AC/DC                                                                                                                                     |
| <b>supply voltage of the light source at AC</b>           |                                                                                                                                           |
| • at 50 Hz rated value                                    | 24 V                                                                                                                                      |
| • at 60 Hz rated value                                    | 24 V                                                                                                                                      |
| supply voltage 1 of the light source at DC rated value    | 24 V                                                                                                                                      |
| <b>Control circuit/ Control</b>                           |                                                                                                                                           |
| <b>inrush current of LED module maximum</b>               | 2 A                                                                                                                                       |
| <b>Auxiliary circuit</b>                                  |                                                                                                                                           |
| <b>design of the contact of auxiliary contacts</b>        | Silver alloy                                                                                                                              |
| <b>number of NC contacts for auxiliary contacts</b>       | 0                                                                                                                                         |
| <b>number of NO contacts for auxiliary contacts</b>       | 1                                                                                                                                         |
| <b>Connections/ Terminals</b>                             |                                                                                                                                           |
| type of electrical connection of modules and accessories  | Screw-type terminal                                                                                                                       |
| <b>type of connectable conductor cross-sections</b>       |                                                                                                                                           |
| • solid with core end processing                          | 2x (0.5 ... 0.75 mm <sup>2</sup> )                                                                                                        |
| • solid without core end processing                       | 2x (1.0 ... 1.5 mm <sup>2</sup> )                                                                                                         |
| • finely stranded with core end processing                | 2x (0.5 ... 1.5 mm <sup>2</sup> )                                                                                                         |
| • finely stranded without core end processing             | 2x (1,0 ... 1,5 mm <sup>2</sup> )                                                                                                         |
| • at AWG cables                                           | 2x (18 ... 14)                                                                                                                            |
| <b>tightening torque of the screws in the bracket</b>     | 1 ... 1.2 N·m                                                                                                                             |
| tightening torque with screw-type terminals               | 0.8 ... 0.9 N·m                                                                                                                           |
| <b>Lamp</b>                                               |                                                                                                                                           |
| <b>type of light source</b>                               | LED                                                                                                                                       |
| <b>color of the light source</b>                          | blue                                                                                                                                      |
| <b>light intensity</b>                                    | 280 ... 710 mcd                                                                                                                           |
| <b>Ambient conditions</b>                                 |                                                                                                                                           |
| <b>ambient temperature</b>                                |                                                                                                                                           |
| • during operation                                        | -25 ... +70 °C                                                                                                                            |
| • during storage                                          | -40 ... +80 °C                                                                                                                            |
| environmental category during operation acc. to IEC 60721 | 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted for all devices behind front panel) |
| <b>Installation/ mounting/ dimensions</b>                 |                                                                                                                                           |

|                                                    |                      |
|----------------------------------------------------|----------------------|
| <b>fastening method</b>                            | front panel mounting |
| • of modules and accessories                       | Front plate mounting |
| <b>height</b>                                      | 40 mm                |
| <b>width</b>                                       | 30 mm                |
| <b>shape of the installation opening</b>           | round                |
| <b>mounting diameter</b>                           | 22.3 mm              |
| <b>positive tolerance of installation diameter</b> | 0.4 mm               |
| <b>mounting height</b>                             | 11 mm                |
| <b>installation width</b>                          | 29.5 mm              |
| <b>installation depth</b>                          | 49.7 mm              |

#### Certificates/ approvals

|                                 |                          |
|---------------------------------|--------------------------|
| <b>General Product Approval</b> | <b>Test Certificates</b> |
|---------------------------------|--------------------------|



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

|                          |              |
|--------------------------|--------------|
| <b>Marine / Shipping</b> | <b>other</b> |
|--------------------------|--------------|



[Confirmation](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1102-0AB50-1BA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1102-0AB50-1BA0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1102-0AB50-1BA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1102-0AB50-1BA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1102-0AB50-1BA0&lang=en)

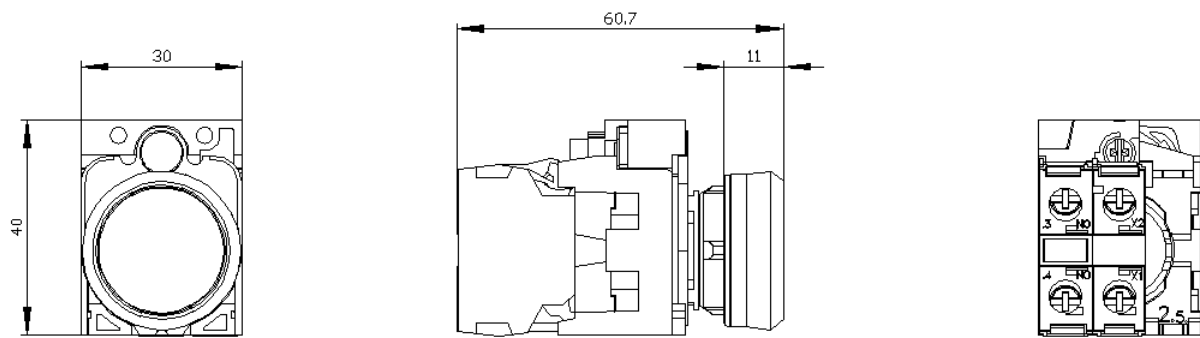

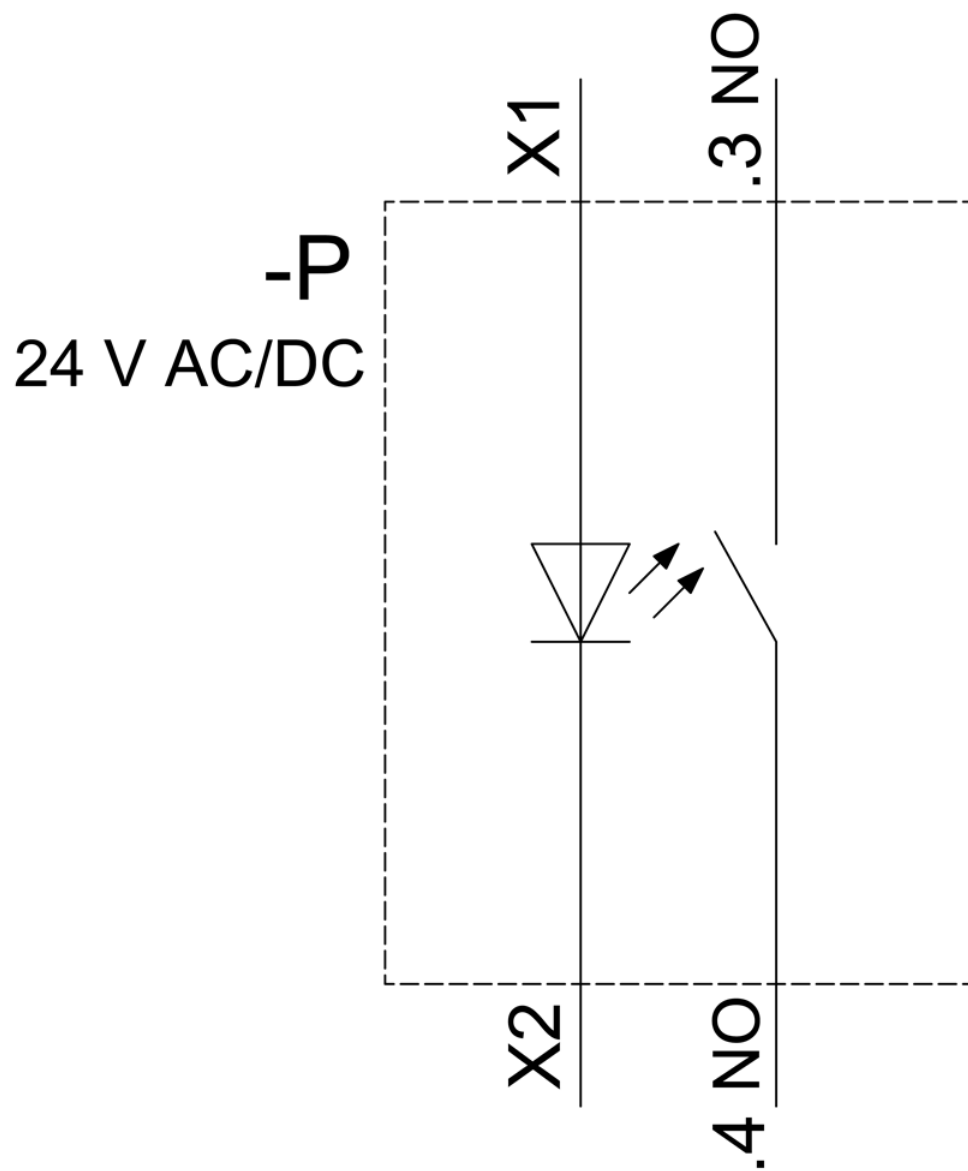

last modified:

7/14/2021 