








Solid-state contactor 1-phase 3RF2 AC 51 / 30 A / 40 °C 48-460 V / 4-30 V
DC short circuit-proof up to 25 A with B miniature circuit breaker

| | |
|--|--|
| product brand name | SIRIUS |
| product designation | solid-state contactor |
| design of the product | single-phase |
| product type designation | 3RF23 |
| manufacturer's article number | |
| <ul style="list-style-type: none"> _1 of the accessories that can be ordered _3 of the accessories that can be ordered _4 of the accessories that can be ordered _5 of the accessories that can be ordered | 3RF2900-3PA88 3RF2900-0EA18 3RF2950-0GA16 3RF2920-0FA08 |
| product designation | |
| <ul style="list-style-type: none"> _1 of the accessories that can be ordered _3 of the accessories that can be ordered _4 of the accessories that can be ordered _5 of the accessories that can be ordered | terminal cover converter load monitoring load monitoring, basis |
| General technical data | |
| product function | short-circuit resistant with B-automatic device |
| power loss [W] for rated value of the current at AC in hot operating state | 33 W |
| <ul style="list-style-type: none"> per pole | 33 W |
| power loss [W] for rated value of the current without load current share typical | 0.6 W |
| insulation voltage rated value | 600 V |
| degree of pollution | 3 |
| type of voltage of the control supply voltage | DC |
| surge voltage resistance of main circuit rated value | 6 kV |
| shock resistance acc. to IEC 60068-2-27 | 15g / 11 ms |
| vibration resistance acc. to IEC 60068-2-6 | 2g |
| reference code acc. to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 28.05.2009 00:00:00 |
| Main circuit | |
| number of poles for main current circuit | 1 |
| number of NO contacts for main contacts | 1 |
| number of NC contacts for main contacts | 0 |
| operating voltage at AC | |
| <ul style="list-style-type: none"> at 50 Hz rated value at 60 Hz rated value | 48 ... 460 V 48 ... 460 V |
| operating frequency rated value | 50 ... 60 Hz |
| operating range relative to the operating voltage at AC | |

| | |
|--|--|
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 40 ... 506 V 40 ... 506 V |
| operational current | |
| <ul style="list-style-type: none"> • at AC-51 rated value • at AC-51 acc. to IEC 60947-4-3 • acc. to UL 508 rated value | 30 A 18.5 A 26 A |
| operational current minimum | 500 mA |
| operational current of the MCB at AC rated value | 25 A |
| rate of voltage rise at the thyristor for main contacts maximum permissible | 1 000 V/μs |
| blocking voltage at the thyristor for main contacts maximum permissible | 1 200 V |
| reverse current of the thyristor | 10 mA |
| derating temperature | 40 °C |
| surge current resistance rated value | 1 150 A |
| I²t value maximum | 6 600 A ² ·s |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | DC |
| control supply voltage 1 | |
| <ul style="list-style-type: none"> • at DC rated value • at DC | 30 V 4 ... 30 V |
| control supply voltage | |
| <ul style="list-style-type: none"> • at DC initial value for signal <1> detection • at DC full-scale value for signal<0> recognition | 4 V 1 V |
| control current at minimum control supply voltage | |
| <ul style="list-style-type: none"> • at DC | 18 mA |
| control current at DC rated value | 20 mA |
| ON-delay time | 1 ms; additionally max. one half-wave |
| OFF-delay time | 1 ms; additionally max. one half-wave |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts | 0 |
| number of NO contacts for auxiliary contacts | 0 |
| number of CO contacts for auxiliary contacts | 0 |
| Installation/ mounting/ dimensions | |
| fastening method | screw and snap-on mounting onto 35 mm standard mounting rail |
| <ul style="list-style-type: none"> • side-by-side mounting | Yes |
| height | 95 mm |
| width | 22.5 mm |
| depth | 120 mm |
| Connections/ Terminals | |
| type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control circuit | screw-type terminals screw-type terminals |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing • at AWG cables for main contacts | 2x (1.5 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²) 2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²), 1x 10 mm ² 2x (14 ... 10) |
| connectable conductor cross-section for main contacts | |
| <ul style="list-style-type: none"> • solid or stranded • finely stranded with core end processing | 1.5 ... 6 mm ² 1 ... 10 mm ² |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary and control contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts | 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²) 1x (AWG 20 ... 12) |

| | |
|--|---|
| AWG number as coded connectable conductor cross section for main contacts | 14 ... 10 |
| tightening torque <ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals | 2 ... 2.5 N·m 0.5 ... 0.6 N·m |
| tightening torque [lbf·in] <ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals | 18 ... 22 lbf·in 4.5 ... 5.3 lbf·in |
| design of the thread of the connection screw <ul style="list-style-type: none"> • for main contacts • of the auxiliary and control contacts | M4 M3 |
| stripped length of the cable <ul style="list-style-type: none"> • for main contacts • for auxiliary and control contacts | 7 mm 7 mm |
| Safety related data | |
| protection class IP on the front acc. to IEC 60529 | IP20 |
| touch protection on the front acc. to IEC 60529 | finger-safe, for vertical contact from the front |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 1 000 m |
| ambient temperature <ul style="list-style-type: none"> • during operation • during storage | -25 ... +60 °C -55 ... +80 °C |
| Electromagnetic compatibility | |
| conducted interference <ul style="list-style-type: none"> • due to burst acc. to IEC 61000-4-4 • due to conductor-earth surge acc. to IEC 61000-4-5 • due to conductor-conductor surge acc. to IEC 61000-4-5 • due to high-frequency radiation acc. to IEC 61000-4-6 | 2 kV / 5 kHz behavior criterion 2 2 kV behavior criterion 2 1 kV behavior criterion 2 140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1 |
| field-based interference acc. to IEC 61000-4-3 | 80 MHz ... 1 GHz 10 V/m, behavior criterion 1 |
| electrostatic discharge acc. to IEC 61000-4-2 | 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 |
| conducted HF interference emissions acc. to CISPR11 | Class A for industrial environment |
| field-bound HF interference emission acc. to CISPR11 | Class B for the domestic, business and commercial environments |
| Short-circuit protection, design of the fuse link | |
| manufacturer's article number <ul style="list-style-type: none"> • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable | 3NE1803-0 5SE1335 3NE8003-1 3NC1032 3NC1450 3NC2263 |
| manufacturer's article number of the gG fuse <ul style="list-style-type: none"> • at NH design usable • at cylindrical design 14 x 51 mm usable • at cylindrical design 22 x 58 mm usable | 3NA6807: These fuses have a smaller rated current than the semiconductor relays 3NW6105-1: These fuses have a smaller rated current than the semiconductor relays 3NW6205-1: These fuses have a smaller rated current than the semiconductor relays |
| manufacturer's article number <ul style="list-style-type: none"> • of DIAZED fuse usable • of NEOZED fuse usable | 5SB2711: These fuses have a smaller rated current than the semiconductor relays 5SE2320: These fuses have a smaller rated current than the semiconductor relays |

Certificates/ approvals

| General Product Approval | EMC | Declaration of Conformity |
|---|---|---|
|  |  |  |
| |  |  |
| | | Miscellaneous |

| Test Certificates | other | Railway |
|--|--|-------------------------------------|
| Type Test Certificates/Test Report | Special Test Certificate | Confirmation |
| | | Vibration and Shock |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2330-1DA44>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2330-1DA44>




Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2330-1DA44>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2330-1DA44&lang=en

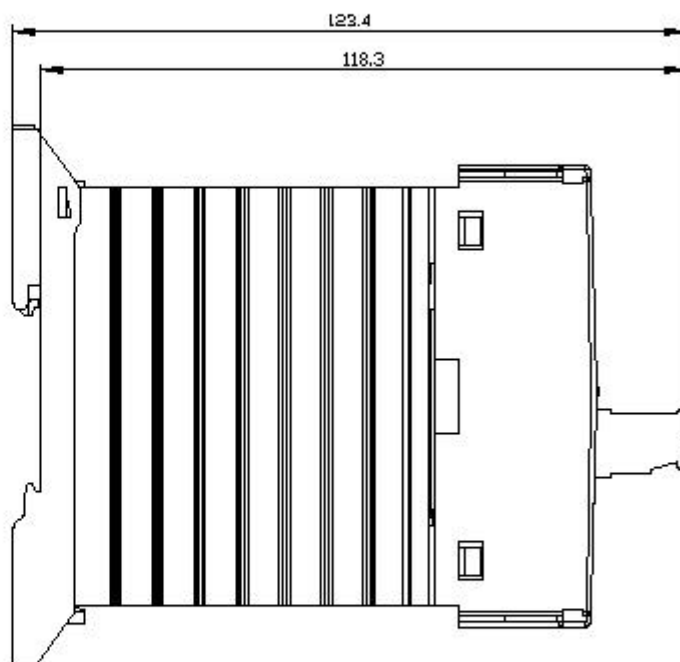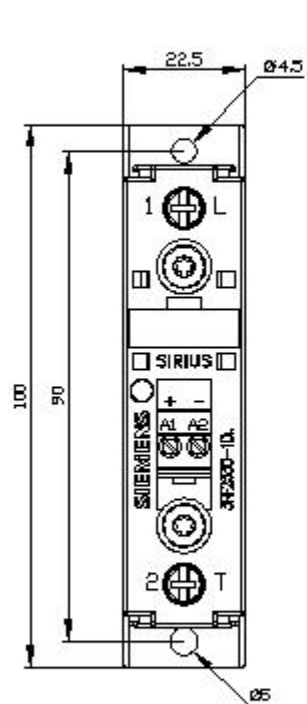

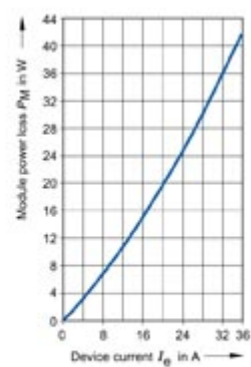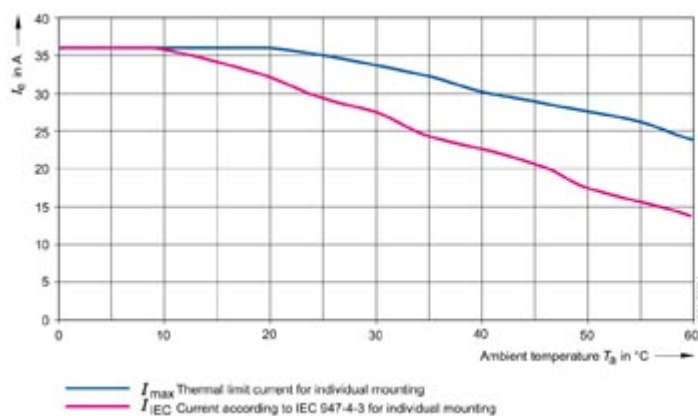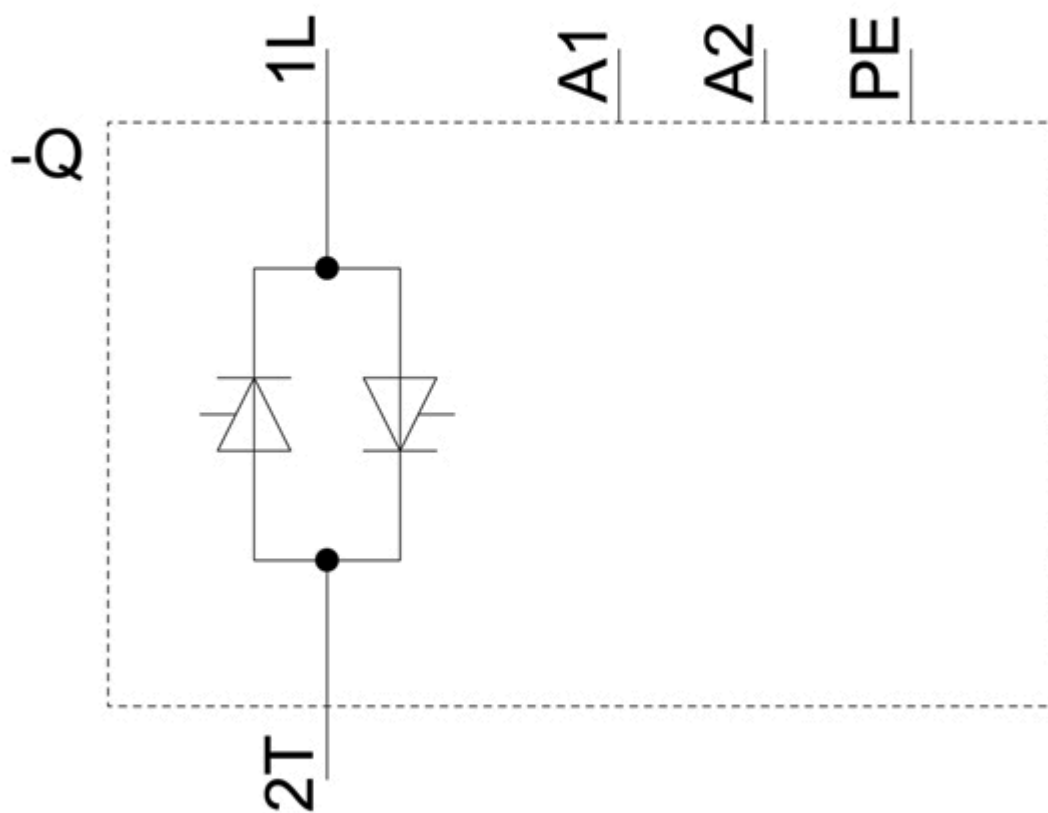

last modified:

5/6/2021 