



AS-i compact module K60 digital 4 DQ, IP67 4 x output, 2 A 24 V DC maximal 4 A for all outputs 4 x M12 socket Y-II assignment Mounting plate 3RK1901-0CA00 must be ordered separately

General technical data	
design of the product	digital I/O modules for operation in the field, IP67 - K60
Type	4 outputs
design of the slave type	standard slave
I/O configuration	8
ID/ID2 code	1/F
Number I/O sockets	4
type of electrical connection of the inputs and outputs	M12 screw-type terminals
AS interface total current input max	270 mA
operating voltage according to AS-Interface specification	26.5 ... 31.6 V
Ground terminal	PIN5 of each M12 socket is connected to the grounding wrist strap in the mounting plate using a pin
Addressing	front addressing socket
Delivery note	the modules are delivered without mounting plate
Note 2	An external additional supply (AUX POWER) of 20 to 30 V DC is required for the supply of the output circuits. The additional supply must comply with VDE 0106 (PELV), protection class III.
Sensor supply	
input voltage	20 ... 30 V
capacity of the sensor supply for all inputs	
• at ambient temperature 40 °C	200 mA
Inputs	
number of digital inputs	0
type of connection technology	2- and 3-wire technology
Input circuit	PNP transistor
type of voltage of the input voltages	DC
Inputs switching level High min	10 V
input current at digital input	
• for signal <1> minimum	6 mA
• with signal <0> maximum	1.5 mA
Inputs	
• sensor supply using AS-Interface	short-circuit and overload resistant
design of the pin assignment of the inputs	Y-II assignment
Outputs	
number of digital outputs	4
type of voltage of output voltages	DC
Outputs external power supply 24 V DC	using black AS-Interface flat cable

ampacity of the semiconductor output at DC-13 at 24 V	2 A
Outputs aggregate current max	4 A
type of switching output	PNP transistor
design of the pin assignment of the outputs	Y-II assignment
Outputs socket assignment	3 = "-", 2/4 = output, 5 = ground terminal
property of the output short-circuit proof	Yes
Outputs • short-circuit protection • induction protection • watchdog	built-in built-in built-in

Assignment of the data bits

Assignment of data bits • socket • socket 2 • socket 3 • socket 4 • socket 5 • socket 6 • socket 7 • socket 8	not assigned (closed) not assigned (closed) not assigned (closed) not assigned (closed) PIN4 = OUT1 (D0), PIN2 = OUT2 (D1) PIN4 = OUT2 (D1) PIN4 = OUT3 (D2), PIN2 = OUT4 (D3) PIN4 = OUT4 (D3)
--	--

Ambient conditions

ambient temperature • during operation • during storage	-25 ... +85 °C -40 ... +85 °C
protection class IP	IP67

Display

Status display • display of I/Os • display of Uaux • display of AS-Interface/diagnostics	yellow LED green LED green/red LED
--	--

Mechanical data

width	60 mm
height	152 mm
depth	29 mm
fastening method	standard rail mounting/wall mounting using mounting plate for K60 compact module
shock resistance	15g / 11 ms

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



[Miscellaneous](#)

Shipping Approval



other



[Confirmation](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1100-1CQ00-0AA3>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1100-1CQ00-0AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1100-1CQ00-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1100-1CQ00-0AA3&lang=en

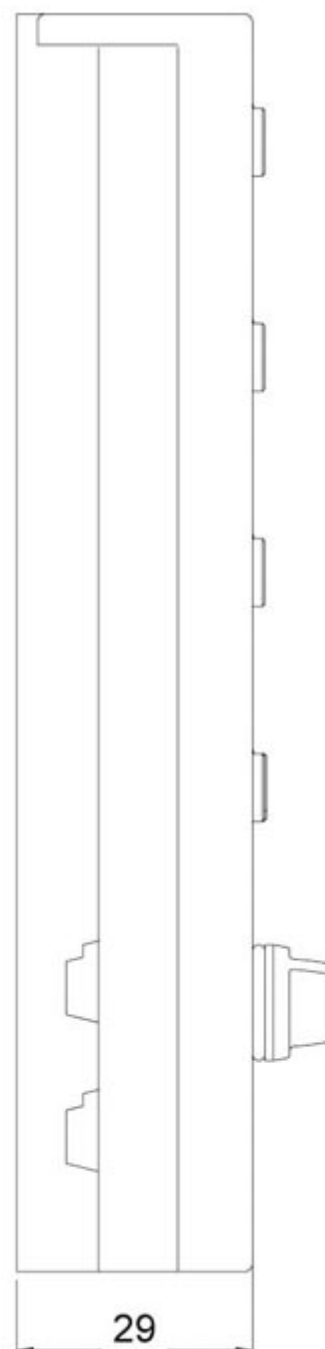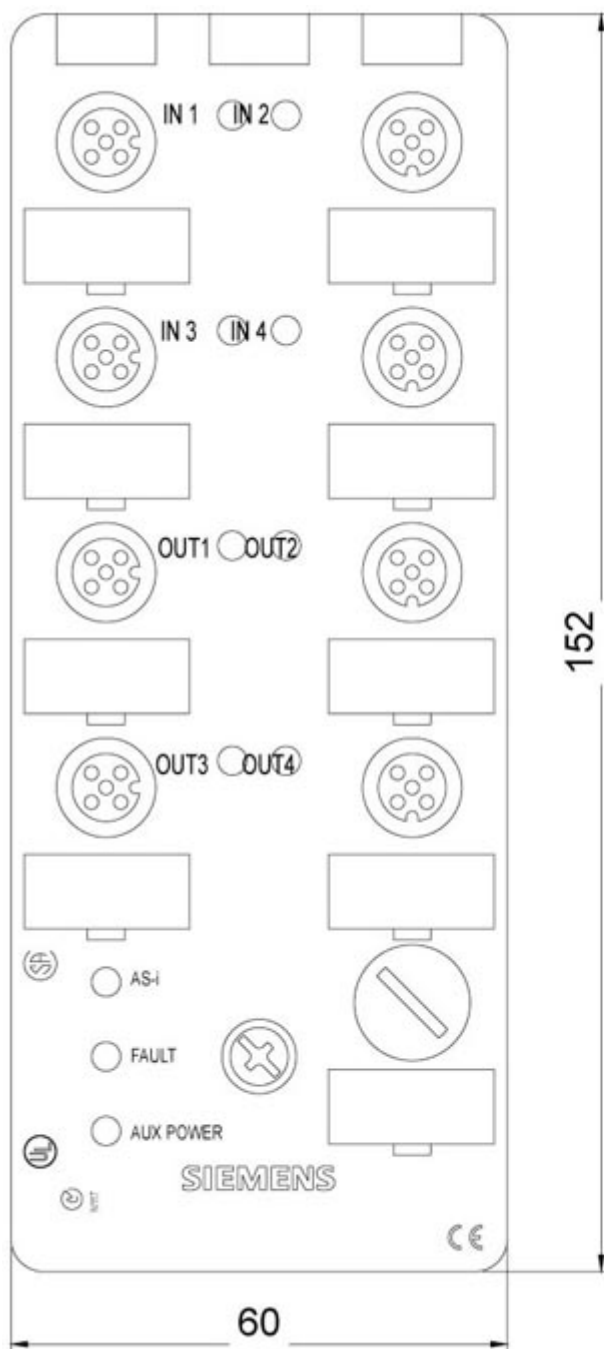

last modified:

3/10/2021 