

Current transformer 20...200 A for 3RB22/23/24 Size S6 Contactor
mounting/stand-alone installation Main circuit: straight-through transformer
Auxiliary circuit: --



product brand name	SIRIUS
product designation	Current measuring module
General technical data	
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	PTB 05 ATEX 3022
Substance Prohibition (Date)	07/01/2006
Main circuit	
adjustable current response value current of the current-dependent overload release	20 ... 200 A
operating voltage	
• at AC-3e rated value maximum	1 000 V
operational current rated value	200 A
operational current at AC-3e at 400 V rated value	200 A
Installation/ mounting/ dimensions	
fastening method	Contactor mounting/stand-alone installation
Connections/ Terminals	
type of electrical connection	
• for main current circuit	straight-through transformers
Safety related data	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Certificates/ approvals	
General Product Approval	For use in hazardous locations



[Confirmation](#)



For use in hazardous locations	Declaration of Conformity	Test Certificates	Marine / Shipping
Explosion Protection Certificate	 EG-Konf.		Special Test Certificate Type Test Certificates/Test Report
			 ABS
Marine / Shipping	other		



[Confirmation](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB2956-2TG2>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB2956-2TG2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB2956-2TG2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB2956-2TG2&lang=en


Characteristic: Tripping characteristics, I_t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RB2956-2TG2/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB2956-2TG2&objecttype=14&gridview=view1>

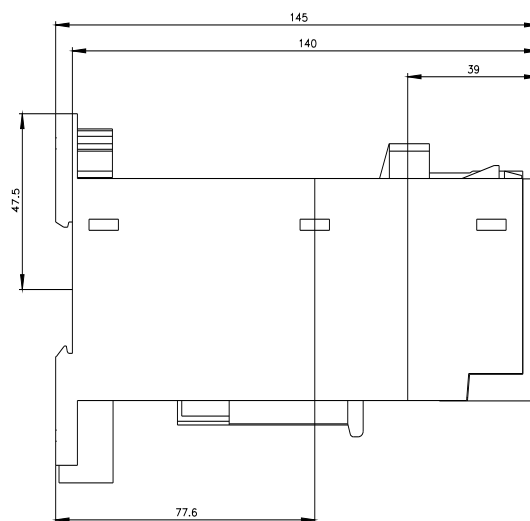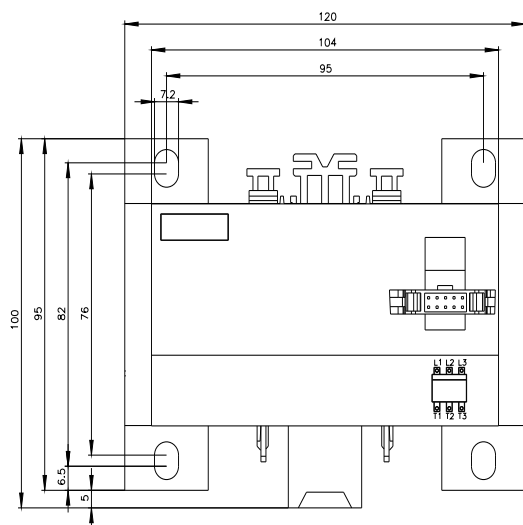

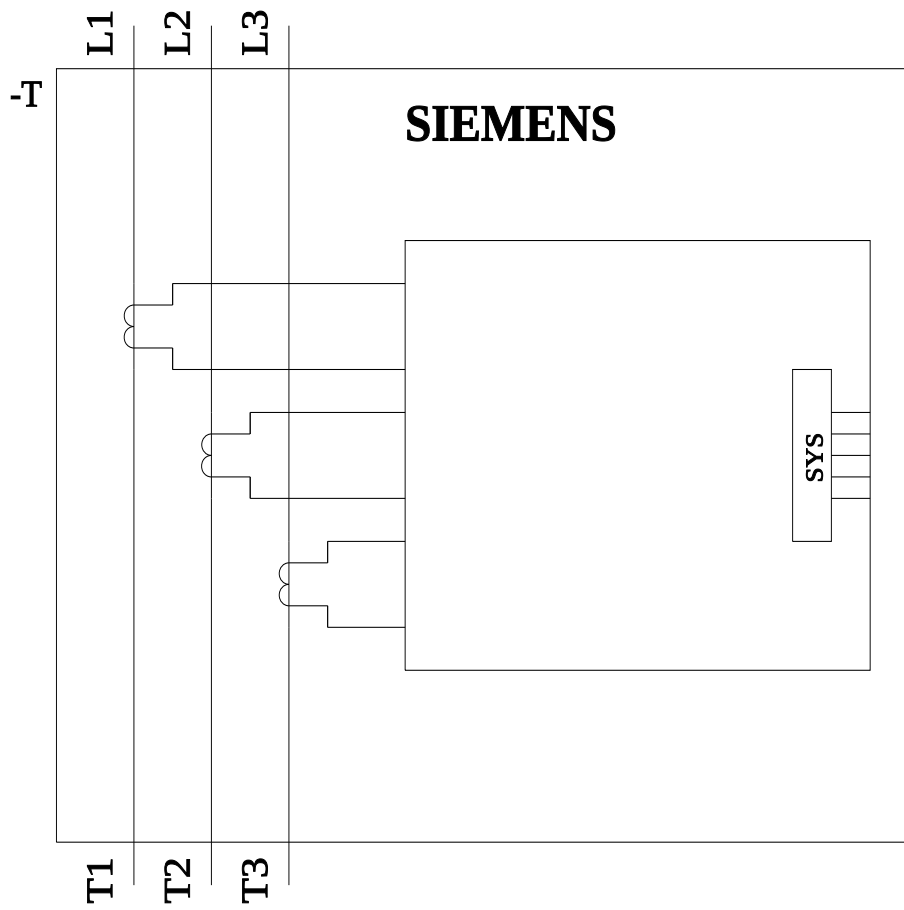

last modified:

2/9/2022 