

Momentary-contact foot switch, 2-pedal without cover, without latching, Metal enclosure IP65, Slow-action contacts 1 NO+1 NC  
Cable entry M25 x 1.5



Product designation	momentary-contact foot switch
Suitability for use safety switch	No

General technical data	
Protection class IP	IP65
Reference code acc. to DIN EN 81346-2	S
Reference code acc. to DIN EN 61346-2	S
Number of switching steps	1
Number of the actuation pedals	2
Minimum actuating force in activation direction	15 N
Number of NC contacts for auxiliary contacts	2
Number of NO contacts for auxiliary contacts	2
Operating current at AC-15	
• at 230 V rated value	16 A
• at 400 V rated value	16 A
Operating current at DC-13	
• at 24 V rated value	3 A
• at 250 V rated value	0.25 A

## Enclosure

<b>Material of the enclosure</b>	metal
<b>Color</b>	
• of the enclosure	black
• of top part of the enclosure	grey

### Actuator

<b>Product feature</b>	
• interlock	No
• Latching	No

### Safety related data

<b>B10 value</b>	
• with high demand rate acc. to SN 31920	1 000 000
<b>Proportion of dangerous failures</b>	
• with low demand rate acc. to SN 31920	50 %
• with high demand rate acc. to SN 31920	50 %
<b>Failure rate [FIT]</b>	
• with low demand rate acc. to SN 31920	100 FIT
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y
<b>Cable entry type</b>	M25 x 1.5

### Ambient conditions

<b>Ambient temperature</b>	
• during operation	-25 ... +80 °C

### Installation/ mounting/ dimensions

<b>Height</b>	68 mm
<b>Width</b>	193 mm
<b>Depth</b>	221 mm

### Certificates/ approvals

## General Product Approval

## Declaration of Conformity



CCC



CSA



UL



EG-Konf.

[Miscellaneous](#)

## Test Certificates

## Marine / Shipping

[Miscellaneous](#)



ABS



LRS



PRS



RINA



DNV-GL  
DNVGL.COM/AF

## other

[Confirmation](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE2932-0AB20>

### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE2932-0AB20>


### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE2932-0AB20>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SE2932-0AB20&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE2932-0AB20&lang=en)



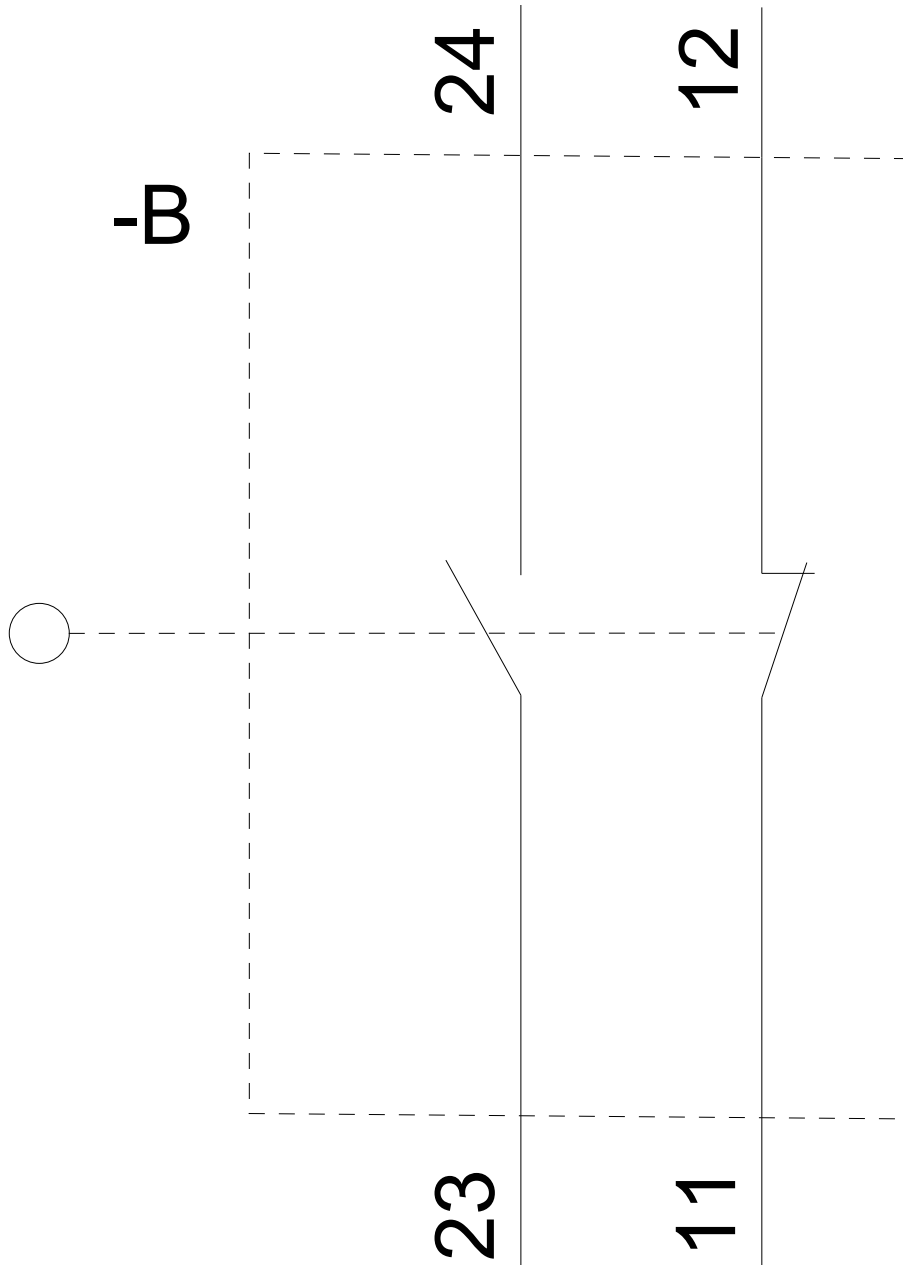

last modified:

03/10/2020