

SIRIUS Compact load feeder DOL starter 690 V 24 V AC/DC 50...60 Hz 8...32 A IP20 Connection main circuit: screw terminal Connection auxiliary circuit: plug-in, without terminals



Product brand name	SIRIUS
Product designation	compact starter
Design of the product	direct starter
Product type designation	3RA61

General technical data	
Product function	
• Control circuit interface to parallel wiring	Yes
Product extension	
• Auxiliary switch	Yes
Power loss [W] for rated value of the current	
• at AC in hot operating state	5.4 W
• at AC in hot operating state per pole	1.8 W
Insulation voltage	
• rated value	690 V
Degree of pollution	3
Surge voltage resistance rated value	6 000 V
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	400 V
• between auxiliary and auxiliary circuit	250 V

• between control and auxiliary circuit	300 V
Protection class IP	IP20
Shock resistance	a=60 m/s ² (6g) with 10 ms per 3 shocks in all axes
Mechanical service life (switching cycles)	
• of the main contacts typical	10 000 000
• of auxiliary contacts typical	10 000 000
• of the signaling contacts typical	10 000 000
Electrical endurance (switching cycles) of auxiliary contacts	
• at DC-13 at 6 A at 24 V typical	30 000
• at AC-15 at 6 A at 230 V typical	200 000
Type of assignment	continuous operation according to IEC 60947-6-2
Reference code acc. to DIN EN 81346-2	Q
Reference code acc. to DIN EN 61346-2	Q

Ambient conditions	
Installation altitude at height above sea level	
• maximum	2 000 m
Relative humidity during operation	10 ... 90 %

Main circuit	
Number of poles for main current circuit	3
Adjustable pick-up value current of the current-dependent overload release	8 ... 32 A
Formula for making capacity limit current	12 x I _e
Formula for interruption capacity limit current	10 x I _e
Mechanical power output for 4-pole AC motor	
• at 400 V rated value	15 kW
• at 500 V rated value	11 kW
• at 690 V rated value	11 kW
Operating voltage	
• at AC-3 rated value maximum	690 V
Operating current	
• at AC at 400 V rated value	32 A
• at AC-43	
— at 400 V rated value	29 A
— at 500 V rated value	17.6 A
— at 690 V rated value	12.8 A
Operating power	
• at AC-3	
— at 400 V rated value	15 kW
• at AC-43	
— at 400 V rated value	15 000 W
— at 500 V rated value	11 000 W

— at 690 V rated value	11 000 W
• (no-load operating)	3 600 1/h
Operating frequency	
• at AC-41 acc. to IEC 60947-6-2 maximum	750 1/h
• at AC-43 acc. to IEC 60947-6-2 maximum	250 1/h

Control circuit/ Control	
Type of voltage	AC/DC
Control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
Control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
Control supply voltage 1	
• at DC rated value	24 V
Holding power	
• at AC maximum	3.5 W
• at DC maximum	3.1 W

Auxiliary circuit	
Number of NC contacts for auxiliary contacts	1
Number of NO contacts for auxiliary contacts	1
Number of CO contacts	
• of the current-dependent overload release for signaling contact	1
Operating current of auxiliary contacts at AC-12 maximum	10 A
Operating current of auxiliary contacts at DC-13	
• at 250 V	0.27 A

Protective and monitoring functions	
(trip class)	CLASS 10 and 20 adjustable
Operational short-circuit current breaking capacity (Ics)	
• at 400 V	53 kA
• at 500 V rated value	1 kA
• at 690 V rated value	1 kA

UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	32 A
Yielded mechanical performance [hp]	
• for three-phase AC motor	
— at 200/208 V rated value	7.5 hp

— at 220/230 V rated value	10 hp
— at 460/480 V rated value	20 hp
Contact rating of auxiliary contacts according to UL	contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300

Short-circuit protection

Product function Short circuit protection	Yes
Design of short-circuit protection	electromagnetic
Design of the fuse link	
<ul style="list-style-type: none"> • for short-circuit protection of the auxiliary switch required 	fuse gL/gG: 10 A
<ul style="list-style-type: none"> • for short-circuit protection of the signaling switch of the short-circuit release required 	6A gL/gG/400V
<ul style="list-style-type: none"> • for short-circuit protection of the signaling switch of the overload release required 	4A gL/gG/400V

Installation/ mounting/ dimensions

<ul style="list-style-type: none"> • (mounting position) 	any
<ul style="list-style-type: none"> • Mounting position recommended 	vertical, on horizontal standard mounting rail
<ul style="list-style-type: none"> • (mounting type) 	screw and snap-on mounting
(height)	170 mm
Width	45 mm
Depth	165 mm

Connections/Terminals

Product function	
<ul style="list-style-type: none"> • removable terminal for main circuit 	Yes
<ul style="list-style-type: none"> • removable terminal for auxiliary and control circuit 	Yes
Type of electrical connection	
<ul style="list-style-type: none"> • for main current circuit 	screw-type terminals
<ul style="list-style-type: none"> • for auxiliary and control current circuit 	plug-in without terminals
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for main contacts 	
<ul style="list-style-type: none"> — solid 	2x (2.5 ... 6 mm ²), 1x 10 mm ²
<ul style="list-style-type: none"> — finely stranded with core end processing 	2x (2.5 ... 6 mm ²)
<ul style="list-style-type: none"> • at AWG conductors for main contacts 	2x (14 ... 10), 1x 8
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for auxiliary contacts 	
<ul style="list-style-type: none"> — solid 	0.5 ... 4 mm ² , 2x (0.5 ... 2.5 mm ²)
<ul style="list-style-type: none"> — finely stranded with core end processing 	0.5 ... 2.5 mm ² , 2x (0.5 ... 1.5 mm ²)
<ul style="list-style-type: none"> • at AWG conductors for auxiliary contacts 	2x (20 ... 14)

Safety related data

B10 value	
------------------	--

<ul style="list-style-type: none"> • with high demand rate acc. to SN 31920 	2 000 000
Proportion of dangerous failures	
<ul style="list-style-type: none"> • with low demand rate acc. to SN 31920 	40 %
<ul style="list-style-type: none"> • with high demand rate acc. to SN 31920 	50 %
Failure rate [FIT]	
<ul style="list-style-type: none"> • with low demand rate acc. to SN 31920 	100 FIT
T1 value for proof test interval or service life acc. to IEC 61508	20 y

Communication/ Protocol

Product function Bus communication	No
Protocol is supported	
<ul style="list-style-type: none"> • IO-Link protocol 	No
Product function Control circuit interface with IO link	No

Electromagnetic compatibility

Conducted interference	
<ul style="list-style-type: none"> • due to burst acc. to IEC 61000-4-4 	4 kV main contacts, 2 kV auxiliary contacts
<ul style="list-style-type: none"> • due to conductor-earth surge acc. to IEC 61000-4-5 	4 kV main contacts, 2 kV auxiliary contacts
<ul style="list-style-type: none"> • due to conductor-conductor surge acc. to IEC 61000-4-5 	2 kV main contacts, 1 kV auxiliary contacts
<ul style="list-style-type: none"> • due to high-frequency radiation acc. to IEC 61000-4-6 	0.15-80Mhz at 10V
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	8 kV
Conducted HF-interference emissions acc. to CISPR11	150 kHz ... 30 MHz Class A
Field-bound HF-interference emission acc. to CISPR11	30 ... 1000 MHz Class A

Supply voltage

Supply voltage required Auxiliary voltage	No
--	----

Certificates/approvals

General Product Approval	EMC	Functional Safety/Safety of Machinery
--------------------------	-----	---------------------------------------



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping	other
-------------------	-------



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA6120-1EB34>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA6120-1EB34>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA6120-1EB34>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA6120-1EB34&lang=en


Characteristic: Tripping characteristics, I^t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RA6120-1EB34/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA6120-1EB34&objecttype=14&gridview=view1>

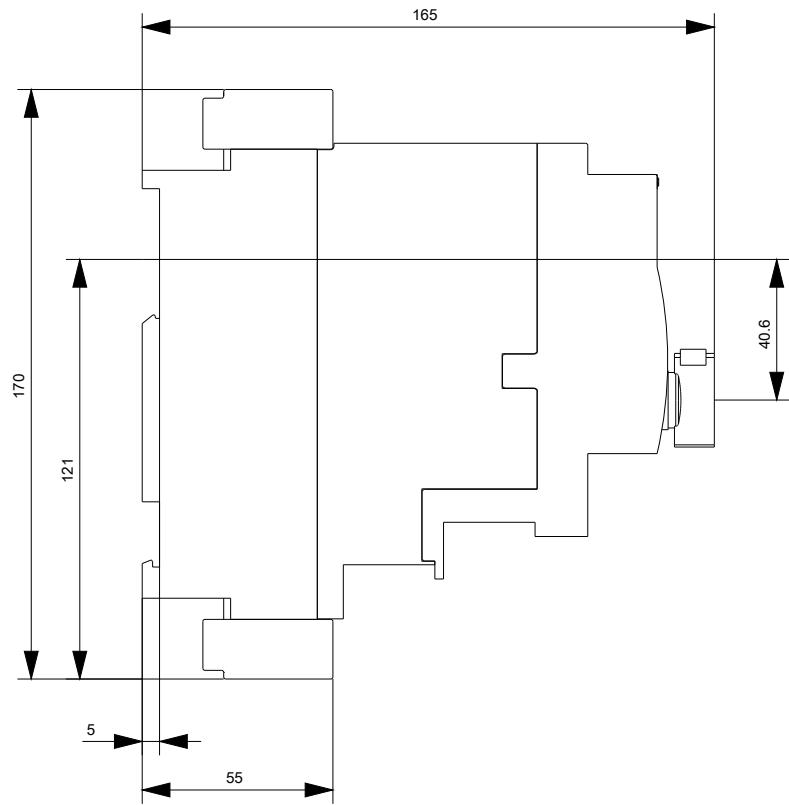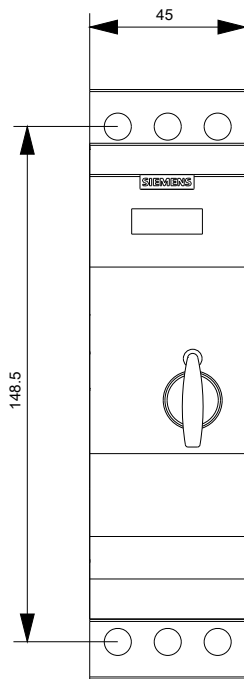

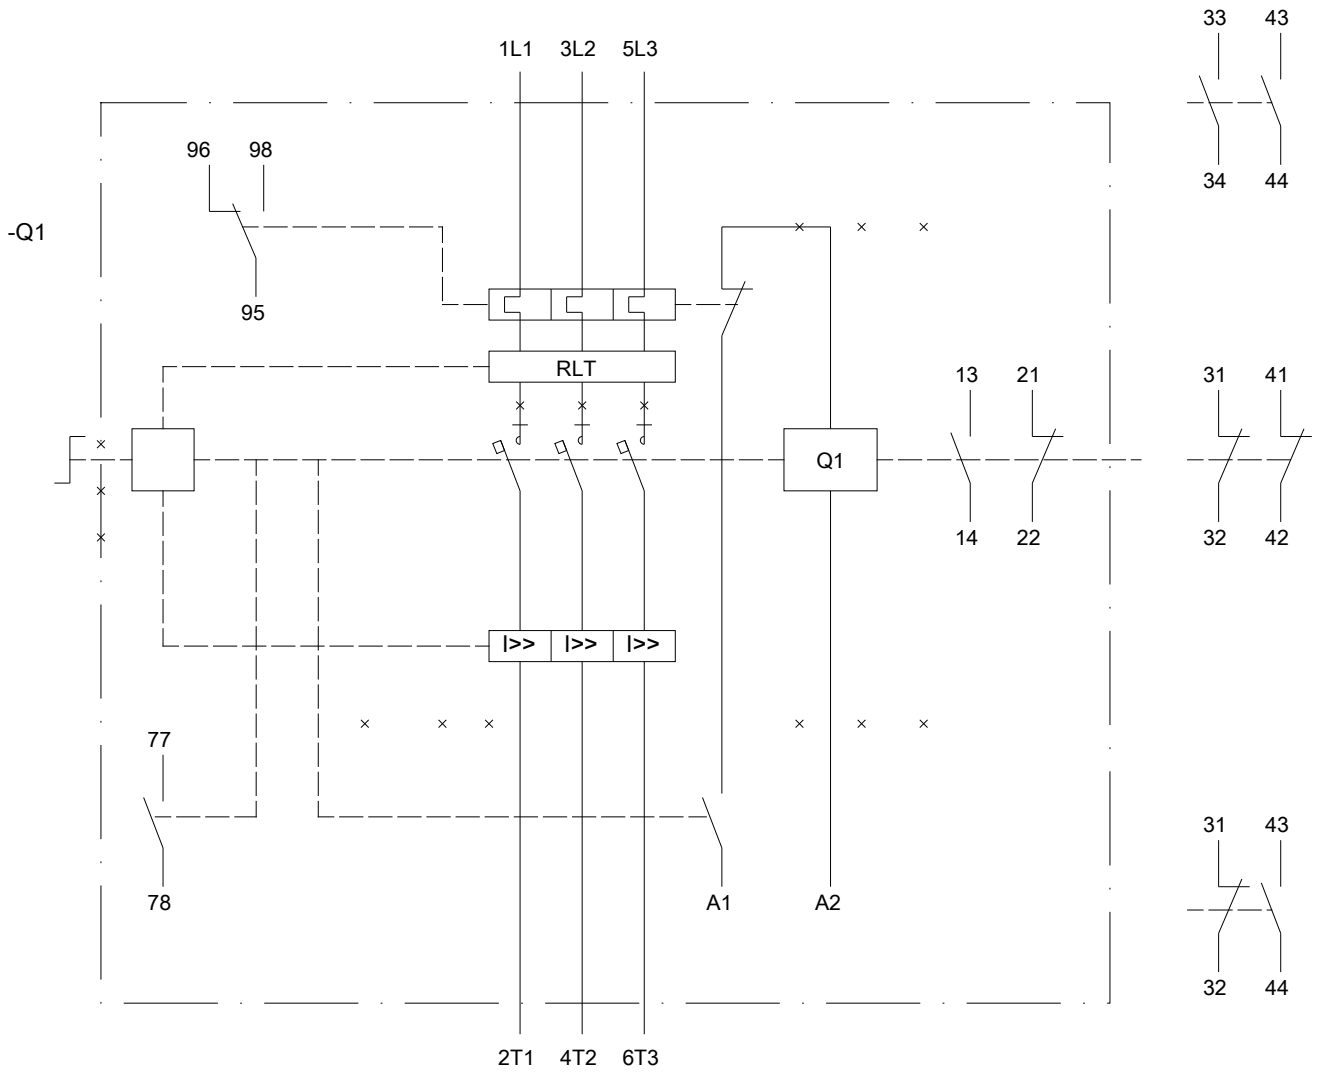

last modified:

04/18/2019