



400A Meter Load Center Combinations


30 Space, 42 Circuit

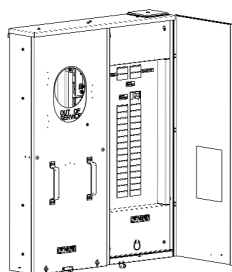


Bolt-on, Underground Feed,
Surface Mount

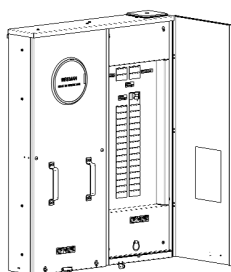


Lever Bypass,
Underground Feed,
Surface Mount

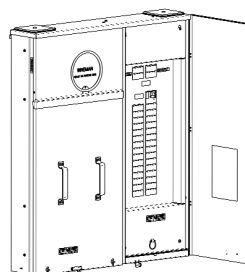

Plug-in, Overhead Feed,
Surface Mount

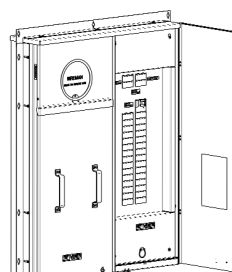

Plug-in, Underground Feed,
Flush Mount

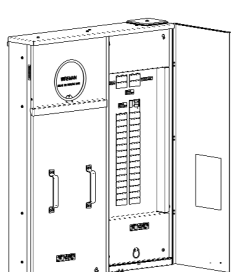

Plug-in, Underground Feed,
Surface Mount



Amps Max.	Socket Rating	Socket Type	Bypass Type	No. of Sp.	No. of Cir.	Feed	Catalog Number	Main Type	Field Added Main Provisions	Mounting	Flush Rail Conversion Kit
400	320	Plug-In	None	30	42	UG	MC3042B1400SD	QNH	QN (200A max)	Surface	ECFRK1
400	320	Plug-In w/ Manual Bypass	Test Block	30	42	UG	MC3042B1400SDS	QNH	QN (200A max)	Surface	ECFRK1
400	320	Lever Bypass	Lever	30	42	UG	MC3042B1400SDL	QNH	QN (200A max)	Surface	ECFRK1
400	320	Bolt-On	Jumper	30	42	UG	MC3042B1400SDB	QNH	QN (200A max)	Surface	ECFRK1
400	320	Plug-In	None	30	42	OH/UG	MC3042B1400SC	QNH	QN (200A max)	Surface	ECFRK2
400	320	Plug-In w/ Manual Bypass	Test Block	30	42	OH/UG	MC3042B1400SCS	QNH	QN (200A max)	Surface	ECFRK2
400	320	Plug-In	None	30	42	UG	MC3042B1400FD	QNH	QN (200A max)	Semi-Flush	ECFRK3*
400	320	Plug-In w/ Manual Bypass	Test Block	30	42	UG	MC3042B1400FDS	QNH	QN (200A max)	Semi-Flush	ECFRK3*

* ECFRK3 is factory-installed on this model.


Features

- 200A factory-installed main breaker
- Provision for a 200A (max) field-installed additional main disconnect
- 22,000 AIC rating
- UL Listed for use only as service entrance equipment
- Meets EUSERC requirements
- Underground or overhead/ underground feed on selected models
- Available plug-in, test block bypass, lever bypass, or bolt-on style meter socket
- Side-hinged, easily removable load center door
- Surface or semi-flush mounting options
- Uses HD type hub

fastfax

SIEMENS


Diagram MC3042B1400SDB

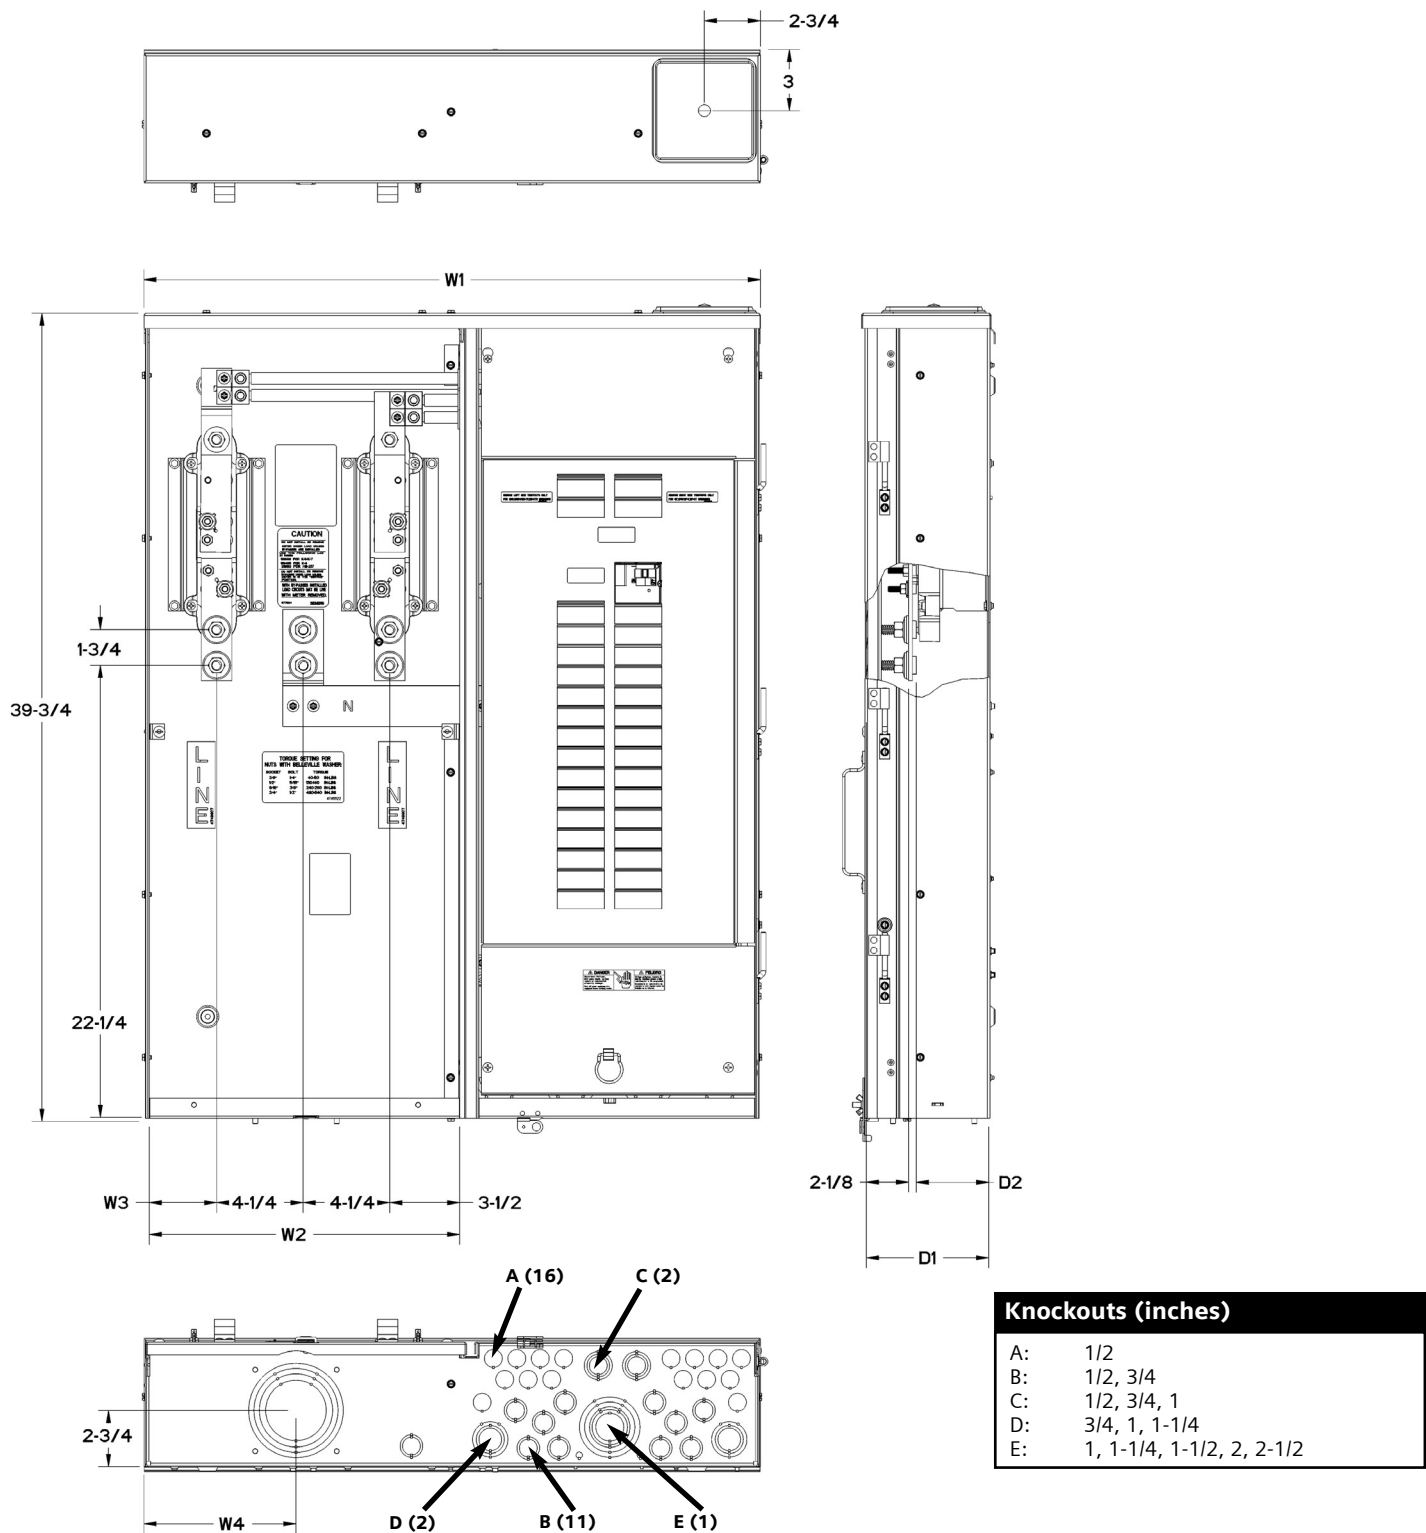

Knockouts (inches)	
A:	1/2
B:	1/2, 3/4
C:	1/2, 3/4, 1
D:	3/4, 1, 1-1/4
E:	1, 1-1/4, 1-1/2, 2, 2-1/2

Dimensions (inches)						
Catalog Number	W1	W2	W3	W4	D1	D2
MC3042B1400SD	30-1/4	15-1/4	3	7-1/2	6	1-1/4
MC3042B1400SDS	30-1/4	15-1/4	3	7-1/2	6	1-1/4
MC3042B1400SDL	30-1/4	15-1/4	3	7-1/2	6	2
MC3042B1400SDB	30-1/4	15-1/4	3	7-1/2	6	3-5/8
MC3042B1400SC	33-1/4	18-1/4	6	10-1/2	6	1-1/4
MC3042B1400SCS	33-1/4	18-1/4	6	10-1/2	6	1-1/4
MC3042B1400FD	30-1/4	15-1/4	3	7-1/2	7	1-1/4
MC3042B1400FDS	30-1/4	15-1/4	3	7-1/2	7	1-1/4


Diagram MC3042B1400SCS

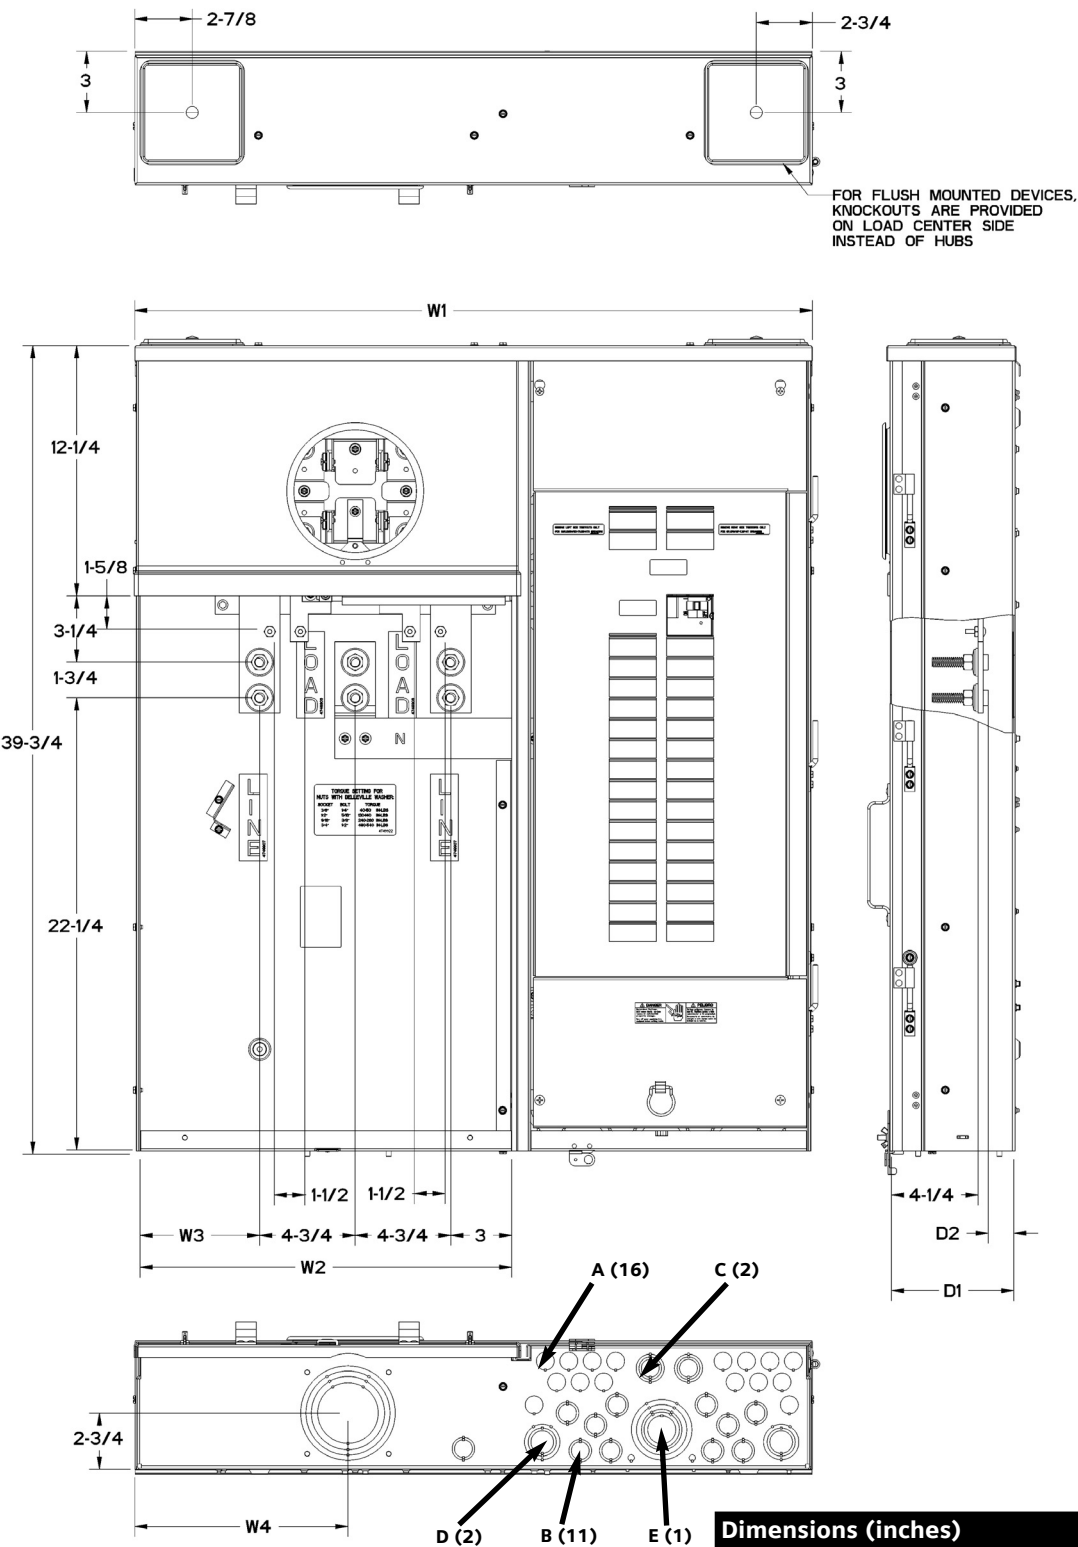

Knockouts (inches)	
A:	1/2
B:	1/2, 3/4
C:	1/2, 3/4, 1
D:	3/4, 1, 1-1/4
E:	1, 1-1/4, 1-1/2, 2, 2-1/2

Dimensions (inches)						
Catalog Number	W1	W2	W3	W4	D1	D2
MC3042B1400SD	30-1/4	15-1/4	3	7-1/2	6	1-1/4
MC3042B1400SDS	30-1/4	15-1/4	3	7-1/2	6	1-1/4
MC3042B1400SDL	30-1/4	15-1/4	3	7-1/2	6	2
MC3042B1400SDB	30-1/4	15-1/4	3	7-1/2	6	3-5/8
MC3042B1400SC	33-1/4	18-1/4	6	10-1/2	6	1-1/4
MC3042B1400SCS	33-1/4	18-1/4	6	10-1/2	6	1-1/4
MC3042B1400FD	30-1/4	15-1/4	3	7-1/2	7	1-1/4
MC3042B1400FDS	30-1/4	15-1/4	3	7-1/2	7	1-1/4

Diagram MC3042B1400SDL

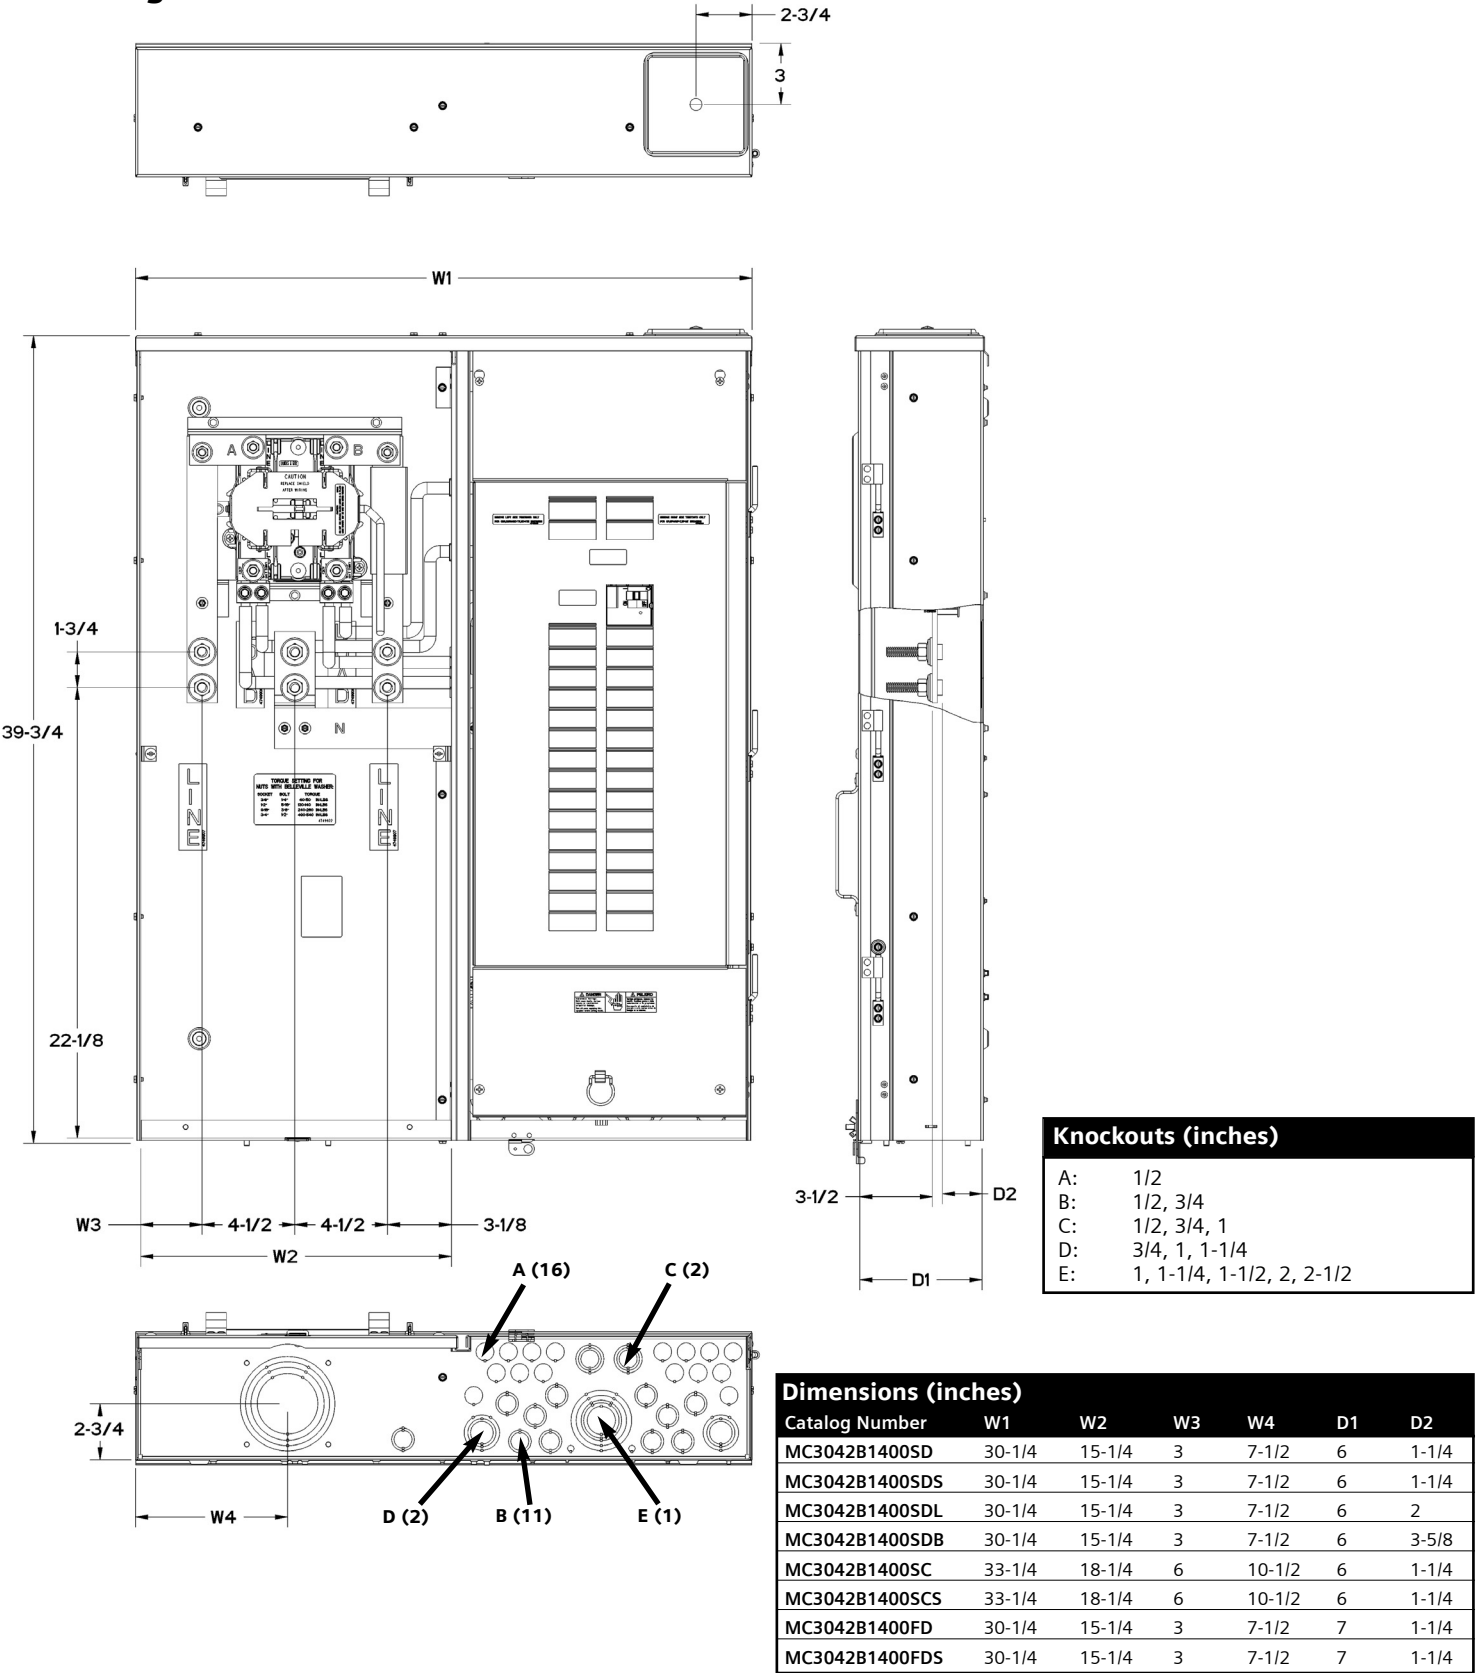

Siemens Energy & Automation, Inc.

3333 Old Milton Parkway
Alpharetta, GA 30005

1-800-964-4114

info.sea@siemens.com

www.sea.siemens.com

©2006 Siemens Energy & Automation, Inc. All Rights Reserved.

Siemens is a registered trademark of Siemens AG. Product names mentioned may be trademarks or registered trademarks of their respective companies. Specifications are subject to change without notice.

RPFL-3042B-1006 Printed in USA