



HALO Commercial

PR8

8-inch Selectable LED Downlight




PR8

The PR8 family with seleCCTable™ technology puts flexibility at your fingertips. Select between 3000K, 3500K or 4000K color temperatures with the flip of a switch. Choose between three housings, five lumen output levels, and three optical distribution options. The PR8 family offers uncommon flexibility in an 8" recessed downlight.

seleCCTable™


Change CCT with the flick of a switch.

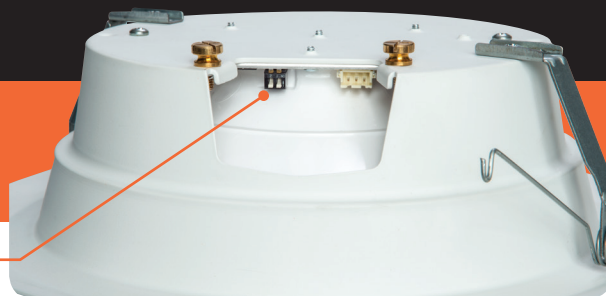

two switches down



one switch up / one switch down

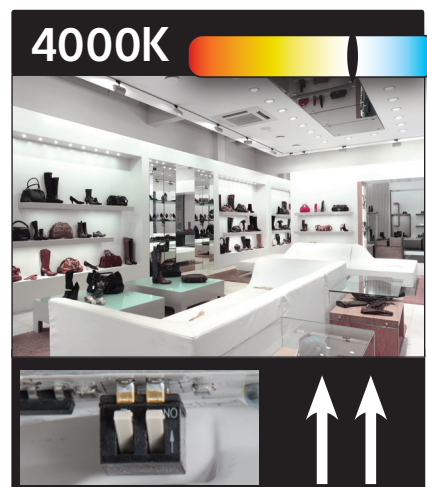

two switches up

Features

- Over 120 lm/w
- 0-10V dimming down to 1%
- Wet location
- Chicago Plenum
- Five year warranty
- 7W and 14W EM backup available
- Light output options:
 - 1000 lumens
 - 1500 lumens
 - 2000 lumens
 - 3000 lumens
 - 4000 lumens

Optical distributions

Field changeable optical distributions






WaveLinX Lite - WTK Tilemount Sensor


- Intuitive Android™ or Apple® iOS® app for basic system code compliant set up and configuration via Bluetooth
- Up to 28 unique areas per project site (WaveLinX Lite Bluetooth network)
- Up to 50 devices for an area, any one of 16 control zones, up to 6 occupancy sets, and custom lighting scenes
- Automatic occupancy or vacancy, sensor sensitivity, daylight dimming, etc. configurable through the app
- Refer to the WaveLinX system specifications for details




WaveLinX Lite WTK Tilemount Wiring Diagram

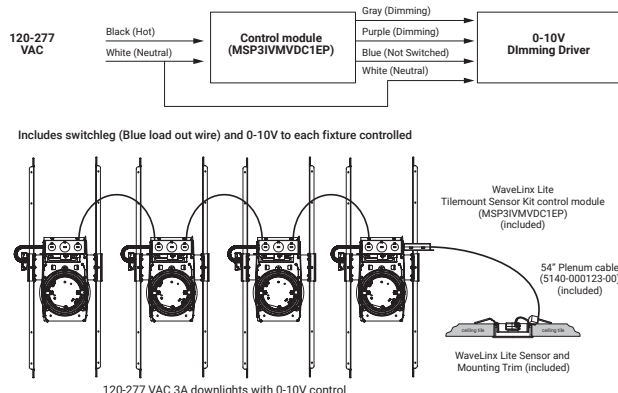

WaveLinX Lite Bluetooth Enabled System

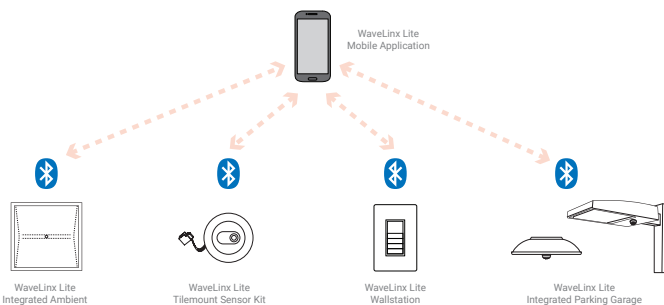


WaveLinX Wireless – WTA Tilemount Sensor




- WaveLinX Wireless functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with Wireless Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations




WaveLinX mobile app settings

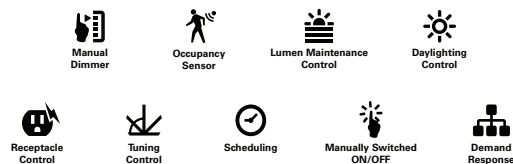

WaveLinX Lite WTA Tilemount Wiring Diagram

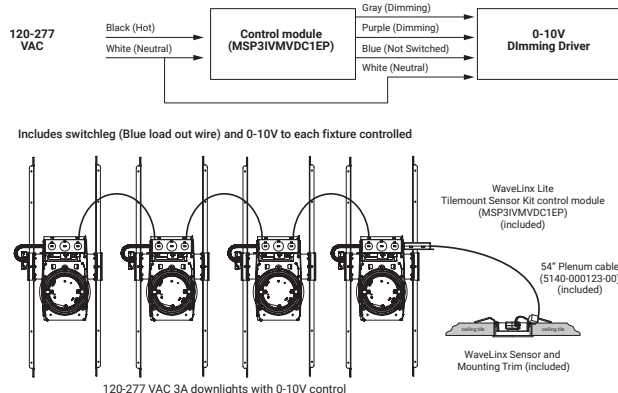

WaveLinX Wireless Trellix Building Management Integration

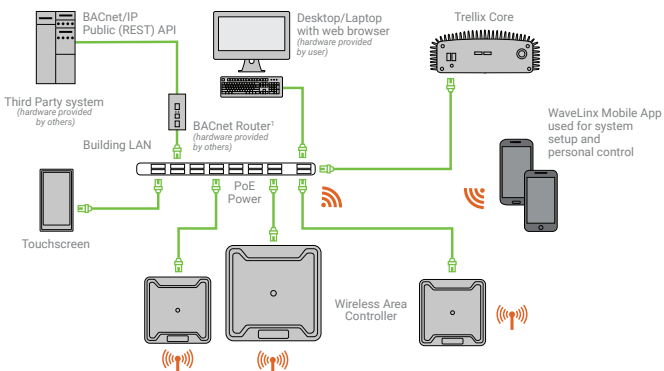

OrderingInformation



New construction/Remodel

FRAME SAMPLE NUMBER: PR840D010

A complete luminaire consists of a frame and LED module, order separately.

Frame	Lumens	Driver	Factory Installed Options
PR8 = 8" aperture LED downlight frame PR8CP = 8" aperture LED downlight frame, CCEA listed for City of Chicago plenum requirements	10 = 1,000 lumens (nominal) 15 = 1,500 lumens (nominal) 20 = 2,000 lumens (nominal) 30 = 3,000 lumens (nominal) 40 = 4,000 lumens (nominal)	D010 = 120-277V 50/60Hz, 0-10V 100% to 1% dimming	REM7 = 7W emergency battery pack with remote test switch and charge indicator light. For use with D010 only. ^{(1) (2)} REM14 = 14W emergency battery pack with remote test switch and charge indicator light. For use with D010 only. ^{(1) (2)} BOD7ST = 7.5 watt Bodine self-test diagnostic emergency module with remote test / indicator light, use with D010 only. ⁽¹⁾ WTA = Factory installed WaveLinX Sensor Kit ^{(1) (3)} WTK = Factory installed WaveLinX Lite Sensor Kit ^{(1) (4)}
		DLV = Low voltage dimming driver (available for 1000, 1500, 2000 lumen values only). DLV for use with Distributed Low Voltage System only, consult. DLVP system specifications and design guide.	REMV7 = 7W low voltage emergency module with remote test switch. For use with DLV only. ^{(1) (2)} REMV14 = 14W low voltage emergency module with remote test switch. For use with DLV only. ^{(1) (2)}
Notes	Notes	Notes	Notes
			(1) Not available with CP version. (2) UL qualified for US only (not Canada). (3) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX system specifications) (4) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite system specifications)



Retrofit/International install from below ceiling

FRAME SAMPLE NUMBER: PR8R40D010

A complete luminaire consists of a frame and LED module, order separately.

Frame	Lumens	Driver	Factory Installed Options
PR8R = 8" aperture LED downlight frame PR8RCP = 8" aperture LED downlight frame, CCEA listed for City of Chicago plenum requirements	10 = 1,000 lumens (nominal) 15 = 1,500 lumens (nominal) 20 = 2,000 lumens (nominal) 30 = 3,000 lumens (nominal) 40 = 4,000 lumens (nominal)	D010 = 120-277V 50/60Hz, 0-10V 100% to 1% dimming	REM7 = 7W emergency battery pack with remote test switch and charge indicator light. For use with D010 only. ^{(1) (2)} REM14 = 14W emergency battery pack with remote test switch and charge indicator light. For use with D010 only. ^{(1) (2)} BOD7ST = 7.5 watt Bodine self-test diagnostic emergency module with remote test / indicator light, use with D010 only ⁽¹⁾ WTA = Factory installed WaveLinX Sensor Kit ^{(1) (3)} WTK = Factory installed WaveLinX Lite Sensor Kit ^{(1) (4)}
		DLV = Low voltage dimming driver (available for 1000, 1500, 2000 lumen values only). DLV for use with Distributed Low Voltage System only, consult DLVP system specifications and design guide	REMV7 = 7W low voltage emergency module with remote test switch. For use with DLV only. ^{(1) (2)} REMV14 = 14W low voltage emergency module with remote test switch. For use with DLV only. ^{(1) (2)}
Notes	Notes	Notes	Notes
			(1) Not available with CP version. (2) UL qualified for US only (not Canada). (3) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX system specifications) (4) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite system specifications)

Surface mount

CYLINDER SAMPLE NUMBER: PR8S40D010MW

A complete luminaire consists of a cylinder and LED module, order separately.



Frame	Lumens	Driver	Finish
PR8S = 8" aperture LED downlight surface mount cylinder	10 = 1,000 lumens (nominal) 15 = 1,500 lumens (nominal) 20 = 2,000 lumens (nominal) 30 = 3,000 lumens (nominal) 40 = 4,000 lumens (nominal)	D010 = 120-277V 50/60Hz, 0-10V 100% to 1% dimming	MW = Matte White MB = Matte Black MMS = Matte Metallic Silver

LED module

MODULE SAMPLE NUMBER: PR8M34MDMW

A complete luminaire consists of a frame and LED module, order separately.

seleCCTable™



LED Module	Shielding	Flange Finish	Accessories
PR8M12 = Downlight LED module for PR8 series, provides 1000, 1500 or 2000 lumens (nominal) depending on connected frame type PR8M34 = Downlight LED module for PR8 series, provides 3000 or 4000 lumens (nominal) depending on connected frame type	MD = Medium distribution plastic lens WD = Wide distribution plastic lens	MW = Matte White MB = Matte Black MMS = Matte Metallic Silver	HB128APK = L channel hanger bar, 26", 'No-Fuss', pair (replacement) RM22 = 22" long wood joist mounting bars, pair PR8WW = Field Installed wall wash optic for PR8M12 and PR8M34 modules PR8MD = Replacement 8" medium distribution lens for PR8M12 and PR8M34 modules PR8WD = Replacement 8" wide distribution lens for PR8M12 and PR8M34 modules PR8TC = Specular clear trim insert for PR8M12 and PR8M34 modules PR8TH = Semi-specular clear trim insert for PR8M12 and PR8M34 modules ABR10P = Oversize trim ring for max 10" ceiling opening - 11.3" flange WTA = Field installed WaveLinX Sensor Kit ^{(1) (3)} WTK = Field installed WaveLinX Lite Sensor Kit ^{(1) (4)}
Notes	Notes	Notes	Notes
			(1) Not available with CP version. (3) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinXsystem specifications) (4) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite system specifications)

Lighting Product Lines

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
HALO
HALO Commercial
Invue
io
IRiS
Lumark
Lumière
McGraw-Edison
Metalux
MWS
Neo-Ray
Portfolio
RSA
Shaper
Streetworks
Sure-Lites

Controls Product Lines

Greengate

Connected Lighting Systems

Fifth Light (Canada Only)
HALO Home
WaveLinx

IoT Platform


Trellix



Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2020 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. BR517002EN
April 2021



All other trademarks are property
of their respective owners.

Product availability, specifications,
and compliances are subject to
change without notice.