

SURE-LITES®

PHOTOLUMINESCENT EXIT SIGNS



FEATURES:

- Heavy Duty, All-Aluminum Construction
- No Electrical Power Consumption
 - utilizes photoluminescent “glow-in-the-dark” technology
- Environmentally Friendly Design
 - non-toxic, non-flammable, non-radioactive
- Fast Installation
 - non-electrical, no wiring required
- 25+ Year Life Expectancy

SPECIFICATION FEATURES

Electrical

Non-Electrical, ideal for areas where electrical wiring is either difficult or unavailable.

Energizes from fluorescent lighting

90 minutes of illumination with a legible viewing distance of at least 50 feet

Minimum 5 foot-candle external unfiltered illumination must be present on the sign at all times of building occupancy

Housing Construction

Heavy duty aluminum housing is impact resistant, corrosion proof and flame-retardant

High-brightness strontium oxide aluminate photoluminescent pigment is applied directly onto housing

Non-Radioactive and Non-Toxic

Ceiling, Wall or End Mounting

Universal, field selectable chevrons

Code Compliance


UL 924 Listed, meets Life Safety NFPA 101, ULC Listed, Most State and Local Codes

Warranty

Exit: 5 years

Rated Life: 25+ years

DIMENSIONS

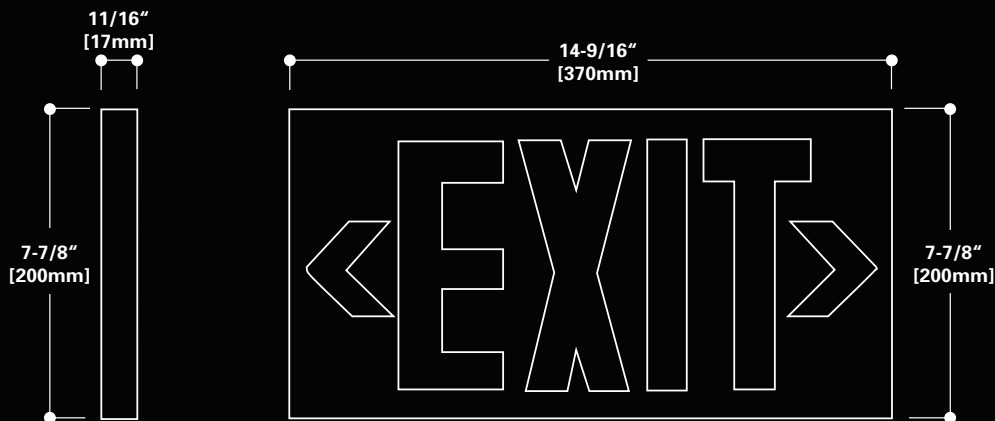

ORDERING INFORMATION

SAMPLE NUMBER: PHL1RBA

PHL				
Family PHL=Photoluminescent Exit	Face Option 1=Single 2=Double	Letter Colors (Outline) R=Red G=Green	Housing Color Blank=Same as Letter Color BA=Brushed Aluminum	Accessories PHLS=Clear Acrylic Shield PHLJ=Large Canopy (J-Box)

