



APX/APXH Thermoplastic LED Exit



APX



APXH

The APX series is a fully code compliant, thermoplastic LED solution for exit needs. The series has universal mounting flexibility (ceiling, wall, end), has field selectable red or green letters, single or double-sided faces and directional chevrons. Options include a white or black housing and remote capacity that can power the APWR LED remote series.

Features	Benefits
LED source with nickel cadmium battery	Up to 10 years with no maintenance
Universal mount; single or double sided	Ease of ordering & installation
Optional remote capacity to drive	Design flexibility; labor and material savings

Certification/Warranty
UL 924 damp location listed
NFPA/NEC/OSHA/CEC code compliant
5-year product warranty
7-year prorated battery warranty



T20 Certified to California Title 20 Appliance Database



Ordering Information


SAMPLE NUMBER: APX6R, APX6G, APX6RBK, APX6GBK, APX7R, APX7G, APX7RBK, APX7GBK

Series	Battery	Face Options	Letter Colors	Housing Color
APX = All-Pro exit	6 = no battery (AC only) 7 = nickel cadmium battery	_ = Universal	R = red (while supplies last) G = green (while supplies last) RG = selectable red or green	_ = white BK = black

SAMPLE NUMBER: APXH7R, APXH7G, APXH7RBK, APXH7GBK

Series	Battery	Face Options	Letter Colors	Housing Color	Remote Heads Powered
APXH = All-Pro exit w/remote capacity	7 = nickel cadmium battery	_ = Universal	R = red (while supplies last) G = green (while supplies last) RG = selectable red or green	_ = white BK = black	2 = two 3.6 V LED heads 4 = four 3.6 V LED heads

Series	Remote Heads Powered	Housing Color
APWR = All-Pro emergency remote	1 = one LED head 2 = two LED heads	_ = White BK = Black

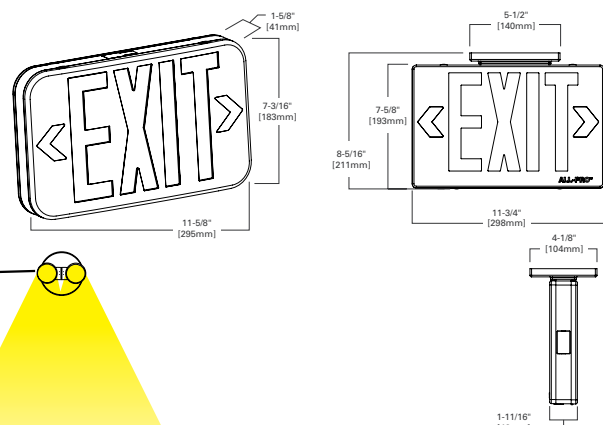

Spacing

APXH7R2
(Remotes not included)



17'
spacing

APXH7R4
(Remotes not included)



17'
spacing



17'
spacing

APC/APCH Thermoplastic LED Exit

Red/Green Selectable coming soon



APC



APC_BK

The APC series is a fully code compliant, thermoplastic LED solution for exit and emergency needs. The series has universal mounting flexibility (ceiling, wall, end), has field selectable red or green letters, single or double-sided faces and directional chevrons. The LED emergency heads can be side or top mounted and will run for a minimum of 90 minutes. Options include a white or black housing and remote capacity that can power the APWR LED remote series.

Features	Benefits
LED source with nickel cadmium battery	Up to 10 years with no maintenance
Universal mount; single or double sided	Ease of ordering & installation
Optional remote capacity to drive 2 or 4 LED heads	Up to 34 feet of indoor/outdoor egress coverage

Certification/Warranty
UL 924 damp location listed
NFPA/NEC/OSHA/CEC code compliant
5-year product warranty
7-year prorated battery warranty



Ordering Information

SAMPLE NUMBER: APXH7R, APXH7G, APXH7RBK, APXH7GBK



Series	Remote Heads Powered	Battery	Face Options	Letter Colors	Housing Color
APC = All-Pro exit/emergency combo	 _ = no remote heads H = two 3.6 V LED heads	7 = nickel cadmium battery	_ = Universal	R = red (while supplies last) G = green (while supplies last) RG = selectable red or green	_ = white BK = black

Series	Remote Heads Powered	Housing Color
APWR = All-Pro emergency remote	1 = one LED head 2 = two LED heads	_ = White BK = Black

Spacing

APC

APC with remote
(Remote not included)

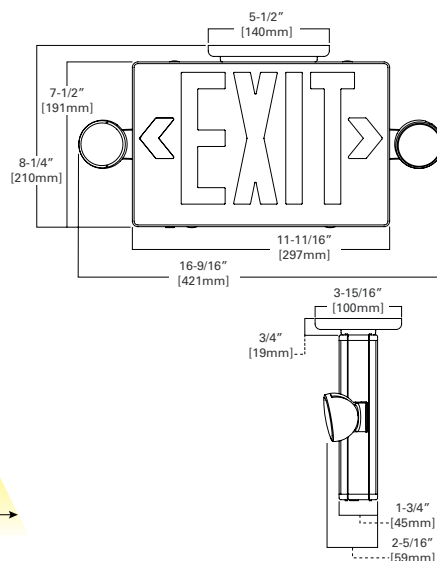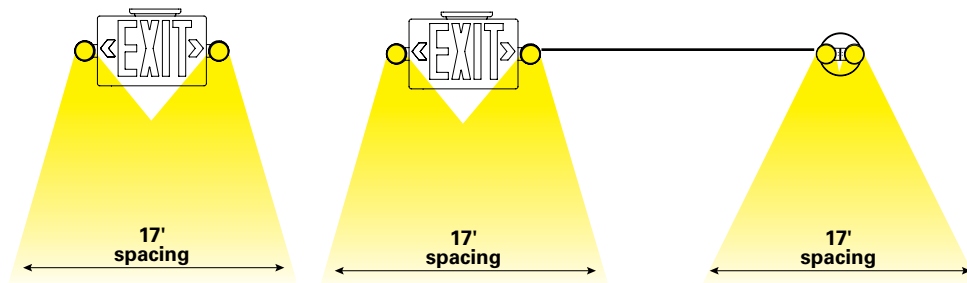

APELMINI Polycarbonate LED Emergency



APELMINI



The APELMINI is a fully code compliant, compact 5-1/4" x 4-3/4" polycarbonate LED emergency light. The LED emergency heads will run for a minimum of 90 minutes. It has an improved design to reduce installation time with a universal j-box mounting pattern, 3 conduit entry points and snap fit housing construction.

Features	Benefits
LED source with nickel cadmium battery	Up to 10 years with no maintenance
Adjustable heads	Design flexibility
Compact design: 5-1/4" x 4-3/4"	Better design aesthetics
Junction box mount and 3 conduit entry points	Multiple installation options

Certification/Warranty
UL 924 damp location listed
NFPA/NEC/OSHA/CEC code compliant
5-year product warranty
7-year prorated battery warranty



T20 Certified to California Title 20 Appliance Database





Ordering Information

SAMPLE NUMBER: APELMINI

Series	Size	Housing Color
APEL = All-Pro emergency light	MINI = J-box size	- = White

Spacing

APELMINI

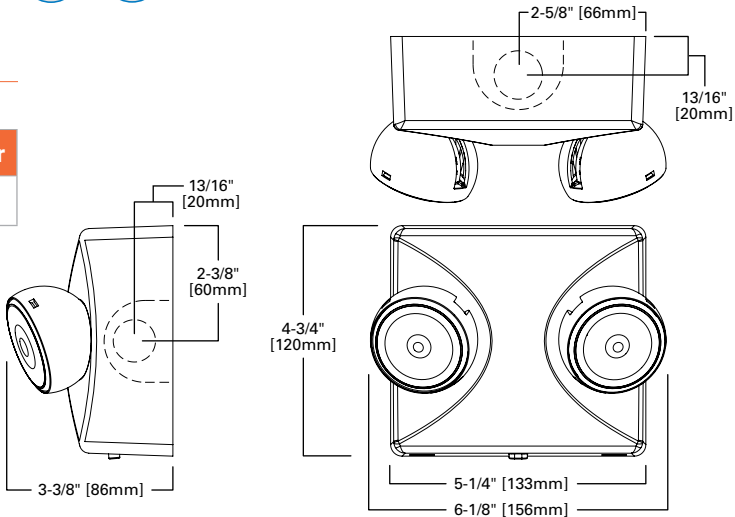

APEL/APELH2 Polycarbonate LED Emergency



APEL



APELBK

The APEL series is a fully code compliant, polycarbonate LED solution for emergency needs. The LED emergency heads will run for a minimum of 90 minutes. The universal j-box mounting pattern and snap fit housing construction significantly reduce installation time. Options include a white or black housing and remote capacity that can power the APWR LED remote series.

Features	Benefits
LED source with nickel cadmium battery	Up to 10 years with no maintenance
Adjustable heads	Design flexibility
Optional remote capacity to drive 2 LED heads	Up to 34 feet of indoor/outdoor egress coverage


Certification/Warranty
UL 924 damp location listed
NFPA/NEC/OSHA/CEC code compliant
5-year product warranty
7-year prorated battery warranty




Ordering Information

SAMPLE NUMBER: APEL, APELBK, APELH2, APELH2BK

Series	Remote Heads Powered	Housing Color
APEL = All-Pro emergency light	 _ = no LED heads H2 = two LED heads	 _ = White BK = Black
APWR = All-Pro emergency remote	 1 = one LED head 2 = two LED heads	 _ = White BK = Black

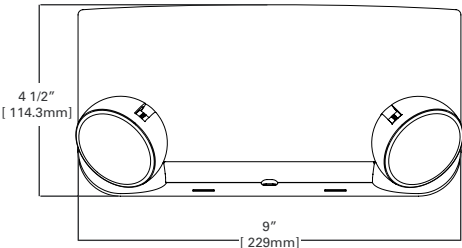

Spacing

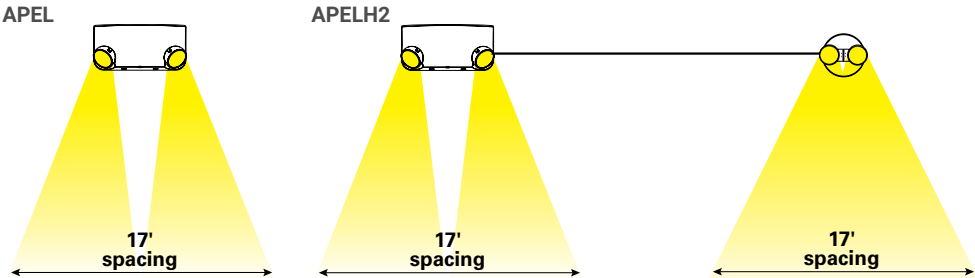

AP2SQLED30 Thermoplastic Square LED Head Emergency



AP2SQLED30



The AP2SQLED30 is a fully code compliant, next generation square head LED solution for emergency needs. The adjustable LED emergency heads provide up to 30 feet of egress coverage and will run for a minimum of 90 minutes. The universal j-box mounting pattern and snap fit housing construction significantly reduce installation time.

Features	Benefits
LED source with nickel cadmium battery	Up to 10 years with no maintenance
Adjustable heads	Design flexibility
Up to 30 feet emergency egress coverage	Fewer fixtures required

Certification/Warranty
UL 924 wet location listed
NFPA/NEC/OSHA/CEC code compliant
5-year product warranty
7-year prorated battery warranty





Ordering Information

SAMPLE NUMBER: AP2SQLED30

Series	Heads	Battery	Coverage	Catalog Numbers
AP = All-Pro	2SQLED = two square LED heads	_ = Nickel Cadmium battery	30 = 30 feet	AP2SQLED30

Spacing

AP2SQLED30

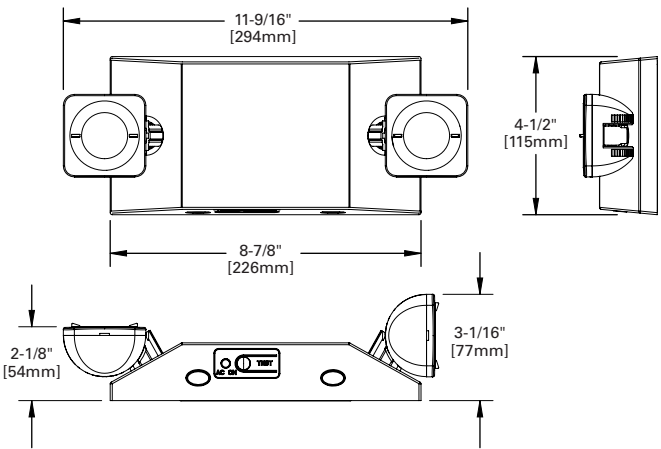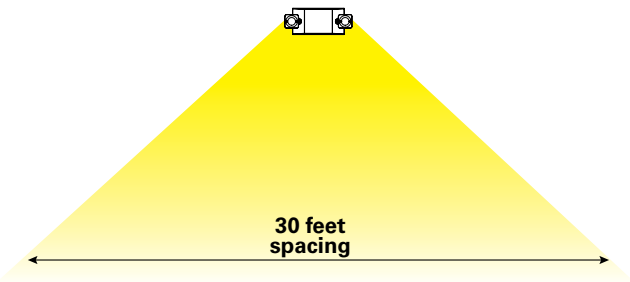

APWR



APWR2



APWR2BK

The APWR series is fully code compliant, polycarbonate LED solution for emergency needs. The heads are fully adjustable and available with a white or black housing. This product is wet location listed and suitable for outdoor applications.

Features	Benefits
LED source	Up to 10 years with no maintenance
Adjustable heads	Design flexibility
Wet location capable	Up to 17 feet of indoor/outdoor egress coverage

Certification/Warranty
UL 924 wet location listed
NFPA/NEC/OSHA code compliant
5-year product warranty






Ordering Information

SAMPLE NUMBER: APWR1, APWR2, APWR1BK, APWR2BK

Series	Remote Heads Powered	Housing Color
APWR = All-Pro emergency remote	1 = one LED head 2 = two LED heads	= White BK = Black

Spacing

APWR

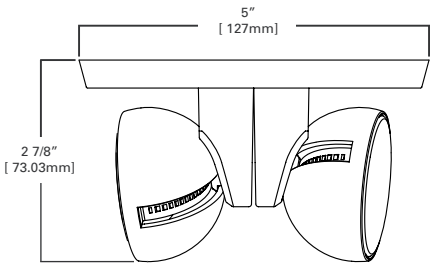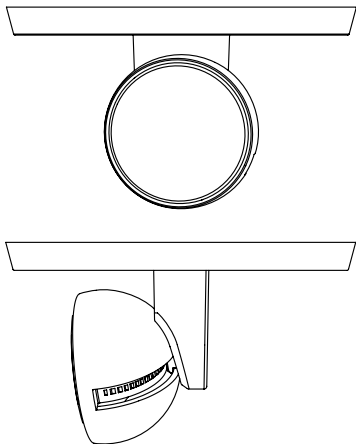

EPBLED LED Emergency battery pack



The EPBLED series enables electrical contractors to add a UL924 code compliant emergency option to an existing LED fixture. While compatible with almost any LED fixture that has an accessible driver, this series offers guaranteed quality and compatibility with Eaton products.

Features	Benefits
Field installable	Meet emergency code with no aesthetic impact
Satisfies all wiring configurations as conduit and test button are included	Design ease; less SKU's to stock
7 watt or 14 watt output creates 600 to 2500 lumens in emergency mode	Design flexibility; superior egress coverage
Laser test feature enables simplified NFPA testing	Labor savings

Certification/Warranty
UL 924 Classified
NFPA/NEC/OSHA/CEC code compliant
Guaranteed compatibility w/Eaton Fixtures
5-year product warranty
7-year prorated battery warranty




T20 Certified to California Title 20 Appliance Database



Ordering Information

SAMPLE NUMBER: EBPLED7W

Series	Output	Run Time
EBPLED = LED emergency battery pack	7W = 7 Watt	_ = 90 minute -3H = 180 minute
	14W = 14 Watt	_ = 90 minute

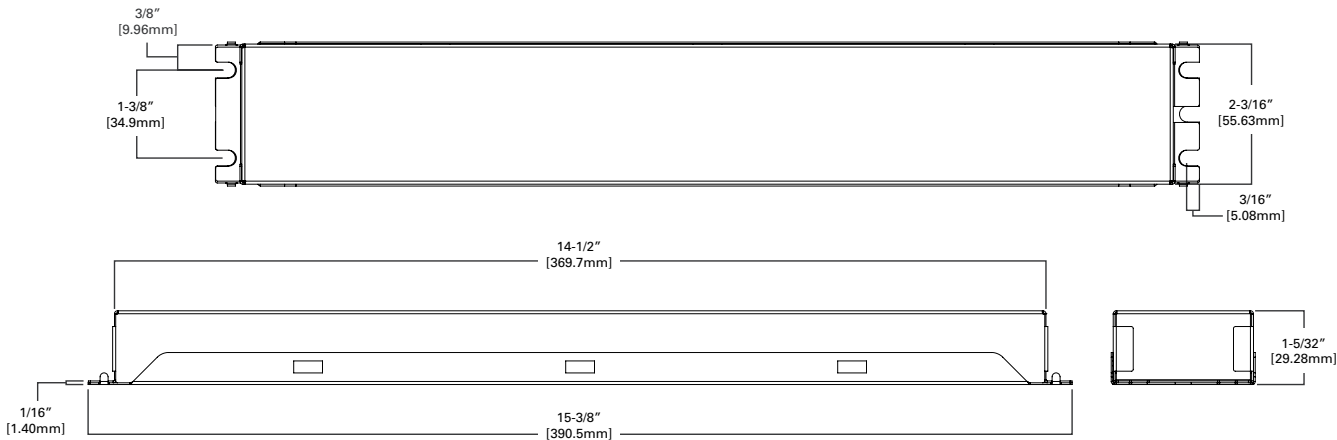

Lighting Brands

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
HALO
HALO Commercial
Invue
iO
Iris
Lumark
Lumière
McGraw-Edison
Metalux
MWS
Neo-Ray
Portfolio
PrentaLux - 3D Printed Lighting
RSA
Shaper
Streetworks
Sure-Lites
Telensa

Controls Brands

Greengate
Fifth Light
Intelligent Lighting Controls

**Connected Lighting Systems
and Smart Spaces Platform**

WaveLinx



Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.

© 2023 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. BR505016EN
November 8, 2023 3:52 PM