Twist-Lock® Devices
15A, 250V, 2 Pole, 3 Wire Grounding Valise® Plug

HUBBELL

Features

- Two captive multiple drive assembly screws
- Totally insulated impact and crush resistant nylon body
- Powerful cord grips prevent conductor slippage and strain on wiring terminals

15A 250V
NEMA L6-15P
UL/CSA
1.5 HP

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Yellow nylon.	.220"-.660" (5.6-16.8)	783585236650	HBL4573VY

Listings

Listed to UL 498
Fed.Spec. W-C-596
Certified to CSA C22.2 No.42

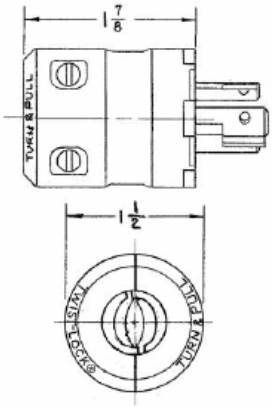

Specifications

Housing	Nylon
Cable Inserts	Polyphenylene Oxide
Blades	Brass
Terminal Screws	#6-32 Brass (Phillips / Slotted / Robertson)
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Steel - Zinc plated

Performance

Electrical

Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

Mechanical

Terminal Accommodation	#18 AWG - #12 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498

Environmental

Flammability	HB or better per UL 94 or CSA 22.2 No. 0.6
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)

Accessories

Connector	HBL4579VY
Duplex Receptacle	HBL4550
Single Receptacle	HBL4560
Flanged Receptacle	HBL4585C

Resources

Customer Use Drawing
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484
Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

HUBBELL®
Wiring Device-Kellems