

COLUMBIA LIGHTING

is a recognized leader in providing quality and innovation at value. Columbia Lighting manufactures an array of commercial and industrial luminaires, leading the industry with exceptional efficacy, optical performance and quality.

INDOOR TABLE OF CONTENTS

COLUMBIA LIGHTING 10	CNW 18	VAPORTITE
CCL 11	CWP 18	PRODUCT SELECTION GUIDE 28
CFP 12	CRW 19	CLB 30
CBT 13	CUC 19	LINEAR HIGH BAY
PANELS & TROFFERS	WRAPS	PRODUCT SELECTION GUIDE 31
PRODUCT SELECTION GUIDE 14	PRODUCT SELECTION GUIDE 20	CRN2 32
CTK 16	CSL 22	CRB 33
RETROFIT	STRIPS	ROUND HIGH BAY
PRODUCT SELECTION GUIDE 17	PRODUCT SELECTION GUIDE 24	PRODUCT SELECTION GUIDE 34
	CVT 26	




CCL


CENTER-LENS TROFFER

The CCL is an efficient LED troffer with architectural style and appearance.

- Frosted acrylic lens
- Fully assembled for quick installation
- Universal voltage, 120-277V
- 0-10V Dimming
- Up to 118 lumens per watt
- IC rated

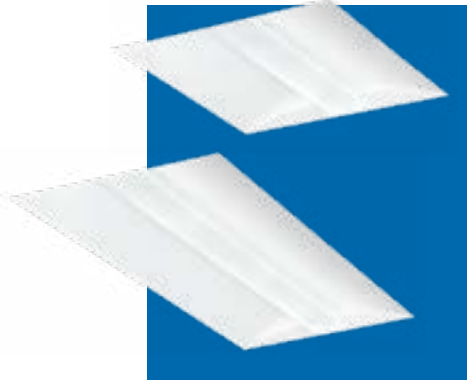

Classroom Layout

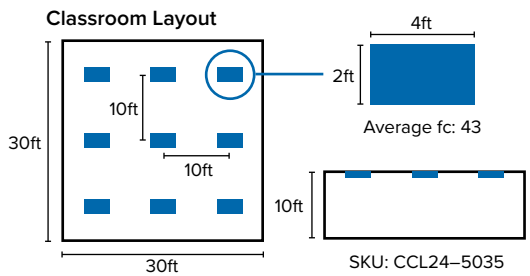

SKU: CCL24-5035

Fixture	Length	Width	Height	Weight
2'x2'	23.8in.	23.8in.	4.0in.	15lbs.
2'x4'	47.8in.	23.8in.	4.0in.	20lbs.




Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
2'x2'													
93077477	CCL22-3335	78531127503	3223	3500K	112	29		•	•	•	40	2 Lamp T8	PKA8TBHS
93077478	CCL22-3340	78531127510	3345	4000K	116	29	•	•	•	•	40	2 Lamp T8	PBRBS4UZ
2'x4'													
93077479	CCL24-5035	78531127527	5001	3500K	114	44	•	•	•	•	20	3 Lamp T8	PMRJBMVH
93077480	CCL24-5040	78531127534	5191	4000K	118	44	•	•	•	•	20	3 Lamp T8	PQVJUNK8
Accessories													
FK22	FK22	78531000752	—	—			•	•	•	•	—	—	—
FK24	FK24	78531038991	—	—			•	•	•	•	—	—	—

CFP

EDGE-LIT FLAT PANEL

The CFP offers Edge-Lit LED technology in a sleek flat panel design.

- Switchable Lumen technology
- Switchable CCT: 3500/4000/5000K
- Recessed or surface mount
- Universal voltage, 120–277V
- Flex and battery back up available in 5–10 day Quick-Ship program
- 0–10V Dimming
- IC rated

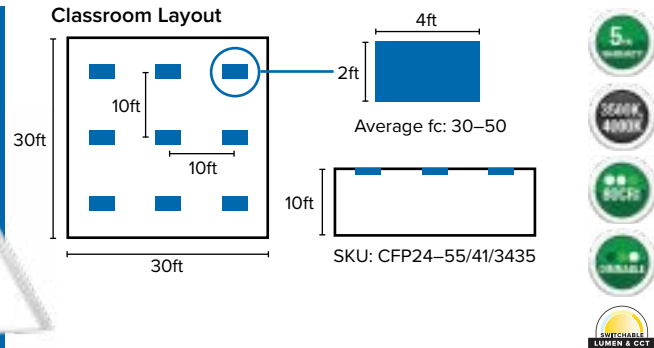

Fixture	Length	Width	Height	Weight
1'x4' Recessed	47.7in.	11.8in.	1.6in.	7.7lbs.
2'x2' Recessed	23.7in.	23.7in.	1.6in.	8.2lbs.
2'x4' Recessed	47.7in.	23.7in.	1.6in.	15.1lbs.

* Weights will differ for HE SKU luminaires.

Part #	Catalog #	UPC	Setting	Lumens			LPW			Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
				3500K	4000K	5000K	3500K	4000K	5000K		CA	GA	IL	NJ			
1'x4'																	
93133730	CFP14-LSCS	840141401867	LOW	3516	3540	3478	119	120	118	29	•	•		20	2 Lamp T5 or T8	Yes; #TBD	
			MED	4204	4257	4163	117	119	116	36							
			HIGH	5617	5706	5522	112	113	110	50							
2'x2'																	
93133732	CFP22-LSCS	840141401874	LOW	3174	3225	3137	131	133	129	24	•	•		40	2 or 3 Lamp T8	Yes; #TBD	
			MED	3603	3679	3562	128	131	127	28							
			HIGH	4381	4477	4291	124	127	122	35							
93133734	CFP22-33CS-HE	840141421933	—	3620	3699	3617	125	128	125	29	•	•		40	2 or 3 Lamp T8		
2'x4'																	
93133736	CFP24-LSCS	840141401881	LOW	3394	3387	3279	134	133	129	25	•	•		20	2 or 3 Lamp T8	Yes; #TBD	
			MED	4291	4318	4231	129	130	127	33							
			HIGH	6011	6065	5856	122	123	119	49							
93133738	CFP24-41CS-HE	840141421971	—	4428	4507	4420	127	129	126	35	•	•		20	2 or 3 Lamp T8	Yes; #TBD	
93133740	CFP24-75CS	840141421995	—	7509	7742	7388	121	125	119	62	•	•		20	3 Lamp T8	Yes; #TBD	


Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
93114032	CFP22-40/33/2835	78531140977	4000, 3300, 2800	3500K	108, 113, 115	40, 30, 25	•	•	•	•	56	2 Lamp T8	PKQBM9G7
93114033	CFP22-40/33/2840	78531140984	4000, 3300, 2800	4000K	125, 131, 133	40, 30, 26	•	•	•	•	56	2 or 3 Lamp T8	PSB40AA2
2'x4'													
93114034	CFP24-55/41/3435	78531140991	5500, 4100, 3400	3500K	122, 125, 128	50, 40, 31	•	•	•	•	28	2 or 3 Lamp T8	PXE068MB
93114035	CFP24-55/41/3440	78531141004	5500, 4100, 3400	4000K	102, 104, 107	49, 39, 30	•	•	•	•	28	2 or 3 Lamp T8	P2FVDW6D
	10-Day Quick-Ship options:												
	Add ELL14 (Emergency Battery Pack Installed, 1400 Lumens) or C588 (5-wire Flex) to any stocked option. Examples: CFP14-55/41/3435-ELL14; CFP14-55/41/3435-C588												
Accessories													
93078803	PLD10M	782520869335	—	—	—	—	•	•	•	•	—	—	—
93080406	PLRTS	782520869410	—	—	—	—	•	•	•	•	—	—	—
FK14	FK14	78531000745	—	—	—	—	•	•	•	•	—	—	—
FK22	FK22	78531000752	—	—	—	—	•	•	•	•	—	—	—
FK24	FK24	78531038991	—	—	—	—	•	•	•	•	—	—	—
93094847	SRPSMK-14	78531133283	—	—	—	—	•					—	—
93094848	SRPSMK-22	78531133290	—	—	—	—	•					—	—
93094849	SRPSMK-24	78531133306	—	—	—	—	•					—	—
93093113	CFPCM36Y SC5F-KIT	78531133023	—	—	—	—		•				—	—

CBT

BACK-LIT TROFFER

Affordable LED lensed troffer with smooth even illumination. Shallow height is ideal for tight plenum applications.

- Switchable Lumen / CCT technology
- Recessed or surface mount
- Smooth even illumination
- Universal Voltage, 120-277V
- 0-10 Dimming up to 10%
- IC rated

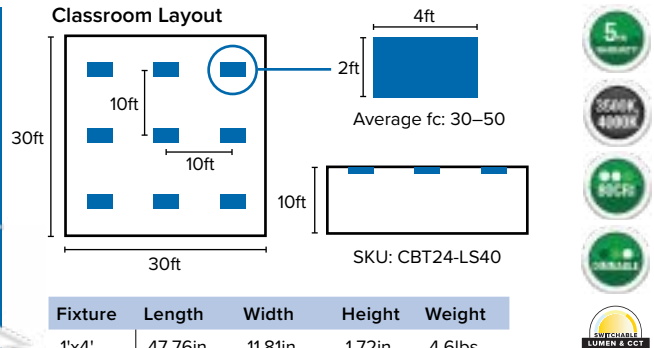

Fixture	Length	Width	Height	Weight
1'x4'	47.76in.	11.81in.	1.72in.	4.6lbs
2'x2'	23.74in.	23.74in.	1.71in.	4.4lbs.
2'x4'	47.76in.	23.74in.	1.72in.	8.8lbs.

Part #	Catalog #	UPC	Setting	Lumens			LPW			Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
				3500K	4000K	5000K	3500K	4000K	5000K		CA	GA	IL	NJ			
1'x4'																	
93133181	CBT14-LSCS	840141401867	LOW	3068	3175	3120	24	128	132	130	•	•		28	2 Lamp T8	P4CXIG0P	
			MED	3473	3611	3563	28	124	129	127						PHZAH9G4	
			HIGH	4500	4731	4587	38	118	124	120						PO90YZID	
93138699	CBT14-LSCS-ELL10	840141403984	LOW	3068	3175	3120	24	128	132	130	•	•		28	2 Lamp T8	—	
			MED	3473	3611	3563	28	124	129	127							
			HIGH	4500	4731	4587	38	118	124	120							
2'x2'																	
93133182	CBT22-LSCS	840141401874	LOW	3044	3154	3097	24	127	131	129	•	•		56	2 U-Lamp or 3 Lamp T8	P4R9FX8S	
			MED	3445	3583	3497	28	124	128	125						P1QPSVS7	
			HIGH	4490	4702	4545	38	118	124	120						PPMPYJ99	
93138700	CBT22-LSCS-ELL10	840141403991	LOW	3044	3154	3097	24	127	131	129	•	•		56	2 U-Lamp or 3 Lamp T8	—	
			MED	3445	3583	3497	28	124	128	125							
			HIGH	4490	4702	4545	38	118	124	120							
2'x4'																	
93133183	CBT24-LSCS	840141401881	LOW	3595	3733	3702	28	130	135	134	•	•		28	2 or 3 Lamp T8	PTAV7RNV	
			MED	4951	5185	5090	38	130	136	134						PND02SPB	
			HIGH	5937	6211	6053	48	123	129	125						P7AIOHNS	
93133547	CBT24-75CS	840141403083	—	7611	8018	7823	65	117	123	120	•	•		28	2 or 3 Lamp T8	PNOML57Q	
93138701	CBT24-LSCS-ELL10	840141404004	LOW	3595	3733	3702	28	130	135	134	•	•		28	2 or 3 Lamp T8	—	
			MED	4951	5185	5090	38	130	136	134							
			HIGH	5937	6211	6053	48	123	129	125							
93139176	CBT24-75CS-ELL10	840141404257	—	7611	8018	7823	65	117	123	120	•	•		28	2 or 3 Lamp T8	—	

Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
2'x2'													
93123035	CBT22-LS35	840141400037	4400, 3300, 2750	3500K	115, 120, 124	38, 28, 24	•	•	•		56	2 U-Lamp or 3 Lamp T8	PV29MP4J
93123036	CBT22-LS40	840141400044	4400, 3300, 2750	4000K	117, 121, 125	38, 28, 24	•	•	•		56	2 U-Lamp or 3 Lamp T8	PSW73VGT
2'x4'													
93123037	CBT24-LS35	840141400051	5500, 4400, 3300	3500K	126, 132, 130	48, 38, 28	•	•	•		28	2 or 3 Lamp T8	PO6K0WYL
93123038	CBT24-LS40	840141400068	5500, 4400, 3300	4000K	128, 133, 131	48, 38, 28	•	•	•		28	2 or 3 Lamp T8	PSHXJPQ0
Accessories													
FK14	FK14	78531000745	—	—	—	—	•	•	•	•	—	—	—
FK22	FK22	78531000752	—	—	—	—	•	•	•	•	—	—	—
FK24	FK24	78531038991	—	—	—	—	•	•	•	•	—	—	—
93123039	SRPSMK14	840141400075	—	—	—	—	•	•	•		—	—	—
93123040	SRPSMK22	840141400082	—	—	—	—	•	•	•		—	—	—
93123041	SRPSMK24	840141400099	—	—	—	—	•	•	•		—	—	—

PANELS & TROFFERS

PRODUCT SELECTION GUIDE

		GOOD			BETTER			BEST		
		tradeSELECT  CBT Back-Lit Troffer			tradeSELECT  CFP Edge-Lit Flat Panel			High-Spec Panel  Scaler™ Edge-Lit Flat Panel		
FEATURES	Sizes	1x4	2x2	2x4	1x4	2x2	2x4	1x4	2x2	2x4
		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	CRI	80+			80+			80+		
	CCT	3500K, 4000K, 5000K			3500K, 4000K, 5000K			3000K, 3500K, 4000K, 5000K		
	SpectraSync™ Color Tuning Technology	–			–			3000–5000K		
	Switchable Technology	Switchable Lumen & CCT			Switchable Lumen & CCT			–		
	SpectraSAFE™ Integrated Surveillance	–			–			–		
	Lumen Range	2970–8018			2876–7742			1492–8995		
	Mounting	Recessed	Surface	Cable	Recessed	Surface	Cable	Recessed	Surface	Cable
		Yes	Yes	–	Yes	Yes	Yes	Yes	Yes	Yes
	Dimming	1–10V Dimming to 10%			0–10V Dimming to 10%			0–10V Dimming to 1% and Dim to Dark		
	Emergency Battery Pack	–			Yes			Yes		
	DTS (UL924 Bypass)	–			–			Yes		
	Flex	–			Yes			Yes		
	Efficacy (maximum LPW)	136			137			145		
	DLC® DesignLights Consortium	Standard			Premium			Standard & Premium		
INTEGRATED CONTROLS	Standalone Occupancy & Daylighting	–			–			–		
	NX Standalone Occupancy & Daylighting	–			–			–		
	NX Networked Occupancy & Daylighting	–			–			–		
	PowerHUBB™	–			–			–		
USES	Applications	Education, Healthcare, Office, Retail			Education, Healthcare, Office, Retail, Cleanroom (ISO Class 5–9 Rating)			Education, Healthcare, Office, Retail, Cleanroom (ISO Class 5–9 Rating)		

DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org




CTK

TROFFER RETROFIT KIT

Retrofit for existing prismatic or parabolic troffers with integrated assembly for easy installation.

- High efficiency frosted polycarbonate lens
- Fits most standard housings
- 0-10V Dimming to 10%

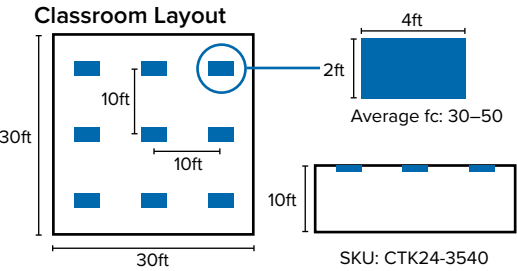

Fixture	Length	Width	Height	Weight
2'x2'	22.5 in.	22.5 in.	3.07 in.	3.9 lbs.
2'x4'	48 in.	22.5 in.	3.07 in.	6.4 lbs.



Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
2'x2'													
93123046	CTK22–2835	840141400143	2800	3500K	127	21	•	•			40	2 Lamp T8	PLC8II87J2HW
93123047	CTK22–2840	840141400150	2800	4000K	127	21	•	•			40	2 Lamp T8	PLO29ODI5ZJ9
93123044	CTK22–3335	840141400129	3300	3500K	124	25	•	•			40	2 Lamp T8	PLHJ5XR0LHI2
93123045	CTK22–3340	840141400136	3300	4000K	124	25	•	•			40	2 Lamp T8	PLEQAMLGWAWC
93123042	CTK22–4035	840141400105	4000	3500K	125	32	•	•			40	3 Lamp T8	PLABNOJ7ZJCN
93123043	CTK22–4040	840141400112	4000	4000K	125	32	•	•			40	3 Lamp T8	PLY2YEJR6U3S
2'x4'													
93123052	CTK24–2535	840141400204	2500	3500K	128	20	•	•			20	1 Lamp T8	–
93123053	CTK24–2540	840141400211	2500	4000K	130	20	•	•			20	1 Lamp T8	–
93123050	CTK24–3535	840141400181	3500	3500K	125	28	•	•			20	1 Lamp T8	PLCV00ZH9RX8
93123051	CTK24–3540	840141400198	3500	4000K	125	28	•	•			20	1 Lamp T8	PL2HPYGGH4DE
93123048	CTK24–4435	840141400167	4400	3500K	126	35	•	•			20	2 Lamp T8	PLTDFS3BF59U
93123049	CTK24–4440	840141400174	4400	4000K	126	35	•	•			20	2 Lamp T8	PLV8R4XKDFMK

RETROFIT

PRODUCT SELECTION GUIDE

PRODUCT SELECTION GUIDE		GOOD		BETTER	
		tradeSELECT  CTK		Mid-Spec Retrofit Kit  SLK	
FEATURES	Sizes	2x2	2x4	2x2	2x4
		Yes	Yes	Yes	Yes
	CRI	80+		80+	
	CCT	3500K, 4000K		3000K, 3500K, 4000K, 5000K	
	SpectraSync™ Color Tuning Technology	–		2700K–5000K, 2700K–6500K	
	Switchable Technology	Switchable Lumen & CCT		–	
	Lumen Range	2551–4536		1545–6200	
	Dimming	0–10V Dimming to 10%		0–10V plus others	
	Emergency	Field Install		Yes	
	DTS (UL924 Bypass)	–		Yes	
	Efficacy (maximum LPW)	130		141	
	DLC® DesignLights Consortium	Standard & Premium		Premium	
Buy America(n) Solutions	–		TAA FAR §52.225-11		
INTEGRATED CONTROLS	Standalone Occupancy & Daylighting	–		Yes	
	NX Standalone Occupancy & Daylighting	–		Yes	
	NX Networked Occupancy & Daylighting	–		–	
	PowerHUBB™	–		–	
USES	Applications	Education, Healthcare, Office, Retail		Education, Healthcare, Office, Retail	


DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

CNW

NARROW WRAP

An attractive narrow wrap with decorative end caps and a polished look, suitable for many applications.

- Frosted acrylic lens
- Fully assembled for quick installation
- Efficient 4' LED narrow utility wrap
- 116 lumens per watt

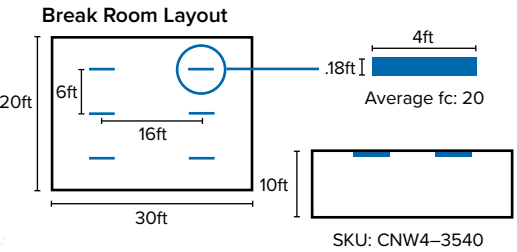

Length	Width	Height	Weight
47.6in.	5.3in.	2.1in.	4.08lbs.




CWP

WRAP LUMINAIRE

Efficient general lighting solution with wide housing ideal for retrofit applications.

- Sturdy frosted acrylic lens
- Universal voltage, 120-277V
- 0-10V Dimming

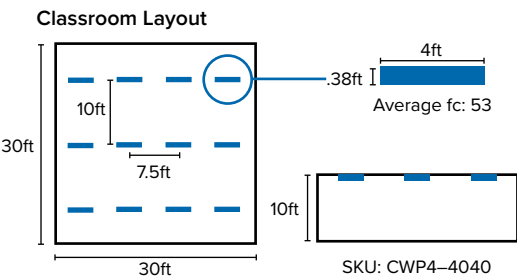

Length	Width	Height	Weight
48.0 in.	9.0 in.	4.5 in.	10.8 lbs.





Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
93075545	CWP4-4035	78531127480	4584	3500K	124	37	•	•	•	•	33	2 Lamp T8	PK3QCUC2
93075546	CWP4-4040	78531127497	4584	4000K	124	37	•	•	•	•	33	2 Lamp T8	PBX1ZHW2

CRW

ROUND WRAP

The CRW is a versatile round wrap with decorative end caps.

- Switchable Lumen and CCT technology
- Frosted acrylic lens
- Up to 153 lumens per watt
- 0-10V Dimming

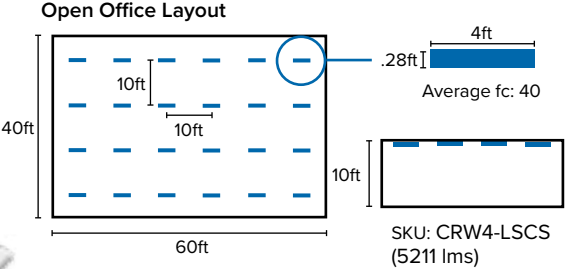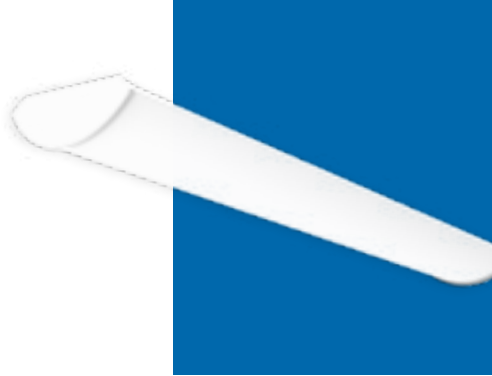

Length	Width	Height	Weight
46.0in.	9.7in.	3.4in.	6.83lbs.



Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
93123054	CRW4-LSCS	840141400228	5200, 4556, 3864	3500K	133, 136, 149	40	•	•			30	1 or 2 Lamp T8 or 1 Lamp T5HO	PBOQKBKD
			5240, 4590, 3892	4000K	141, 149, 160	27							
			5280, 4624, 3920	5000K	137, 145, 156	33							

* Consult Factory

CUC

COMMERCIAL LED UNDERCABINET

Sleek LED undercabinet luminaire with a variety of applications.

- Switchable CCT technology
- Durable polycarbonate lens
- Forward Phase or Electronic Low Voltage dimming
- Direct wire or plug-and-play
- 120V



CUC4-ED120 Mounted at 20" from surface
Workspace desktop foot candles

Fixture	Length	Width	Fixture	Weight
CUC1	11.5in.	3.33in.	1.0in.	1.0lbs.
CUC2	23.5in.	3.33in.	1.0in.	1.9lbs.
CUC3	35.5in.	3.33in.	1.0in.	2.9lbs.
CUC4	47.5in.	3.33in.	1.0in.	3.5lbs.



Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Carton Qty
							CA	GA	IL	NJ	
93124554	CUC1-CS-ED120	840141420387	443, 468, 444	3000/3500/4000K	61, 66, 62	7, 7, 7	•	•			4
93124555	CUC2-CS-ED120	840141420394	896, 943, 910	3000/3500/4000K	62, 67, 63	15, 14, 15	•	•			4
93124556	CUC3-CS-ED120	840141420400	1176, 1211, 1186	3000/3500/4000K	61, 65, 62	19, 19, 19	•	•			4
93124557	CUC4-CS-ED120	840141420417	1628, 1666, 1627	3000/3500/4000K	25, 24, 25	66, 70, 66	•	•			4
Accessories											
93097061	CUC-13CC	078531133634	–	–			•	•			10
93097062	CUC-24CC	078531133641	–	–			•	•			10
93097060	CUC-5F-120-CP	078531133627	–	–			•	•			10

WRAPS

PRODUCT SELECTION GUIDE

GOOD									
FEATURES	tradeSELECT  CNW			tradeSELECT  CWP			tradeSELECT  CRW		
	2'	4'	8'	2'	4'	8'	2'	4'	8'
	Length	–	Yes	–	Yes	–	–	Yes	–
	Width	5.3"			9"			9.7"	
	Continuous Row	–			–			–	
	Lumens (maximum)	3507			4584			5880	
	Efficacy (maximum LPW)	116			124			153	
	Life Rating	54,000 hours @ L70			54,000 hours @ L70			54,000 hours @ L70	
	CRI	80+			80+			80+	
	CCT	4000K			4000K			3500K, 4000K, 5000K	
	SpectraSync™ Color Tuning Technology	–			–			–	
	Switchable Technology	–			–			Lumen & CCT	
	SpectraSAFE™ Integrated Surveillance	–			–			–	
	Lens	Frosted Acrylic			Frosted Acrylic			Frosted Acrylic	
	Dimming	0–10V Dimming to 10%			0–10V Dimming to 10%			0–10V Dimming to 10%	
INTEGRATED CONTROLS	Emergency Battery Pack	–			–			–	
	DLC® DesignLights Consortium	Standard			Standard			Premium	
	Buy America(n) Solutions	–			–			–	
	Standalone Occupancy & Daylighting	–			–			–	
USES	NX Standalone Occupancy & Daylighting	–			–			–	
	NX Networked Occupancy & Daylighting	–			–			–	
USES	PowerHUBB™	–			–			–	
	Applications	Education, Office, Retail, Warehouse			Education, Healthcare, Office, Warehouse			Education, Healthcare, Office, Retail, Warehouse	

DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org



BETTER			BEST		
Mid-Spec Wrap  LAW			High-Spec Wrap  RLW		
2'	4'	8'	2'	4'	8'
Yes	Yes	–	Yes	Yes	Yes
8.31"			8.5"		
–			Yes		
7263			14,711		
125			144		
60,000 hours @ L80			60,000 hours @ L80		
80+			80+, 90		
3000K, 3500K, 4000K, 5000K			3000K, 3500K, 4000K, 5000K		
–			Yes		
–			–		
–			Yes		
Acrylic, Frosted Overlay			Frosted Acrylic		
0–10V Dimming to 1% and Dim to Dark			0–10V Dimming to 1% and Dim to Dark		
Yes			Yes		
Standard			Standard		
–			TAA FAR §52.225-11		
–			Yes		
–			Yes		
–			–		
–			Yes		
Education, Healthcare, Office, Warehouse			Education, Healthcare, Office, Retail, Warehouse		



CSL
LENSED STRIPLIGHT

The CSL is an attractive narrow striplight with LED technology and a wide range of applications.

- Switchable Lumen & CCT technology
- Frosted acrylic lens
- Surface or suspended mount
- Fully assembled for quick installation
- Universal voltage, 120-277V
- 0-10V Dimming

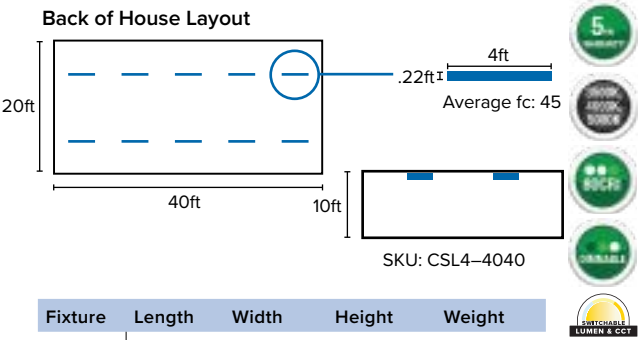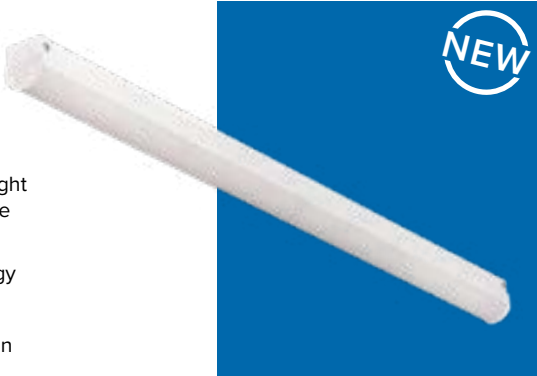

Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
4'													
93134385	CSL4—LSCS	840141403625	5400,4800,4000	3500,4000,5000K	120,128,135	45,38,30	•				120	2 Lamp T8	PTH54URX
8'													
93134386	CSL8—LSCS	840141403632	9300,8200,7400	3500,4000,5000K	116,115,123	80,72,60	•				120	4 Lamp T8	P67H7F6G



STRIPS

PRODUCT SELECTION GUIDE

PRODUCT SELECTION GUIDE		GOOD			BETTER					
		tradeSELECT  CSL			Mid-Spec Strip			Mid-Spec Strip		
					 LCS			 LCL		
FEATURES	Length	2'	4'	8'	2'	4'	8'	2'	4'	8'
		–	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Continuous Row	–			–			–		
	Lumens (maximum)	9900			23,274			21,354		
	Efficacy (maximum LPW)	137			153			144		
	Lens	Frosted Acrylic			None			Frosted Acrylic		
	Emergency Battery Pack	–			Yes			Yes		
	CRI	80+			80+			80+		
	SpectraSAFE™	–			–			–		
	Switchable Technology	Lumen & CCT			–			–		
	SpectraSync™ Color Tuning Technology	–			–			–		
	DLC® DesignLights Consortium	Standard			Premium			Premium		
	Buy America(n) Solutions	–			–			TAA FAR §52.225-11		
INTEGRATED CONTROLS	Standalone Occupancy & Daylighting	–			–			–		
	NX Standalone Occupancy & Daylighting	–			–			–		
	NX Networked Occupancy & Daylighting	–			–			–		
	PowerHUBB™	–			–			–		
USES	Applications	Education, Healthcare, Office, Retail, Industrial			Education, Healthcare, Office, Retail, Industrial Yes			Education, Healthcare, Office, Retail, Industrial		

DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org


BEST		
High-Spec Strip		
 MPS		
2'	4'	8'
Yes	Yes	Yes
Yes		
17,490		
148		
None, Frosted Acrylic, Polycarbonate		
Yes		
80+/90		
Yes		
–		
Yes		
Premium		
TAA FAR §52.225-11		
Yes		
Yes		
Yes		
Yes		
Education, Healthcare, Office, Retail, Industrial		




CVT
VAPORTITE

A narrow body linear vaportite that offers Switchable Lumen outputs and multiple mounting options for easy installation in both retrofits and new construction.

- IP65/66 rated
- Up to 161 lumens per watt
- -40°C to 40°C
- Switchable Lumen technology
- Universal voltage, 120-277V
- 0-10V Dimming to 10%

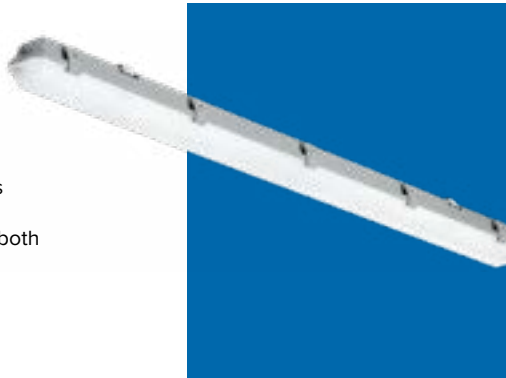

Cold Storage Layout

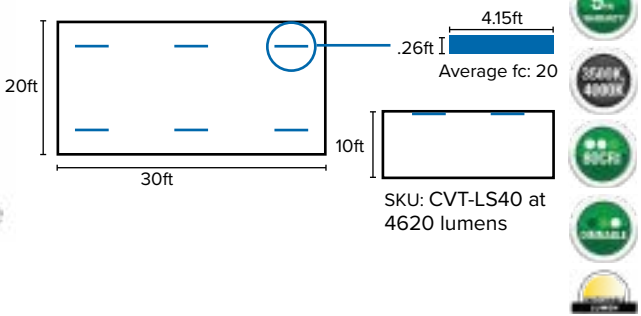

Length	Width	Height	Weight
49.8in.	3.4in.	3.4in.	4.4lbs.

Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
93123404	CVT4-LS40	840141400242	7000, 5800, 4500	4000K	155, 158, 160	48, 38, 29	•	•			24	3, 2, 2 T8 Lamp	PZF65FVJ



VAPORTITE

PRODUCT SELECTION GUIDE

PRODUCT SELECTION GUIDE				GOOD			BETTER					
				tradeSELECT  CVT			Mid-Spec Vaportite  LXEN			Mid-Spec Vaportite  LXEM		
FEATURES	Length	2'	4'	8'	2'	4'	8'	2'	4'	8'		
		–	Yes	–	–	Yes	Yes	Yes	Yes	Yes		
	Certifications	IP65, IP66, Wet Location			IP65, IP66, IP67, Wet Location, UL Sanitation			IP65, IP66, IP67, Wet Location, UL Sanitation, IK10 with polycarbonate lens				
	Lumens Range (Switchable)	4620–7460			2000–4300			2145–22,473				
	Efficacy (maximum LPW)	29–48			111–116			96–143				
	Mounting Height	8'–12'			8'–10'			8'–20'				
	Lens	Ribbed Frosted Polycarbonate			Ribbed Frosted Acrylic			Ribbed Frosted Acrylic, Ribbed Clear Acrylic, Deep Frosted Acrylic, Deep Clear Acrylic, Ribbed Frosted Polycarbonate, Ribbed Clear Polycarbonate				
	Dimming	Yes			Yes			Yes				
	Emergency	–			–			Yes				
	CRI	80+			80+			80+				
	CCT	4000K			3000K, 3500K, 4000K, 5000K			3000K, 3500K, 4000K, 5000K				
	Temperature Range	-40°C to 40°C			-20°C to 50°C			-20°C to 50°C				
	Switchable Technology	Switchable Lumen			–			–				
	Buy America(n) Solutions	–			TAA FAR §52.225-11			TAA FAR §52.225-11				
DLC® DesignLights Consortium	Premium			Standard			Premium					
USES	Applications	Education, Healthcare, Industrial, Cold Storage, Food Processing, Parking Garage			Education, Healthcare, Industrial, Cold Storage, Food Processing, Parking Garage			Education, Healthcare, Industrial, Cold Storage, Food Processing, Parking Garage				

DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

BETTER					
Mid-Spec Vaportite			Mid-Spec Vaportite		
 LXEW			 LXEP		
2'	4'	8'	2'	4'	8'
–	Yes	–	Yes	Yes	Yes
IP65/67/66, Wet Location, UL Sanitation			IP65/67/66, Wet Location, UL Sanitation		
11,079–38,228			2960–19,700		
105–137			88–116		
20'–40'			8'–10'		
Frosted Impact Resistance Acrylic, Clear Impact Resistance Acrylic, Clear UV Stabalized Polycarbonate			Deep Frosted Acrylic, Deep Clear Acrylic		
Yes			Yes		
Yes			Yes		
80+			80+		
3000K, 3500K, 4000K, 5000K			3000K, 3500K, 4000K, 5000K		
-20°C to 50°C			-20°C to 50°C		
–			–		
TAA FAR §52.225-11			–		
Premium			Standard		
Education, Healthcare, Industrial, Cold Storage, Food Processing, Parking Garage			Parking Garage		




CLB

LINEAR HIGH BAY

The CLB is an efficient linear highbay suitable for a variety of areas including warehouses, gyms, and industrial spaces.

- Frosted polycarbonate lens—IK10 impact rated
- IP4X Rated
- 6kV surge protection
- Up to 158 lumens per watt
- -40°C to 50°C
- 0–10V dimming to 10%
- Universal Voltage 120–277V

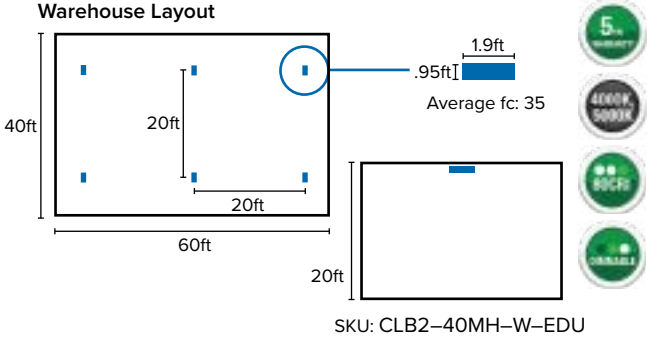

Fixture	Length	Width	Height
LX, MM	22 1⁄16 in.	10in.	2 5⁄16 in.
MH	22 1⁄16 in.	10in.	2 5⁄16 in.
MV	22 1⁄16 in.	14 1⁄16 in.	2 5⁄16 in.
MX	43 1⁄8 in.	10in.	2 5⁄16 in.
HM	43 1⁄8 in.	10in.	2 5⁄16 in.
HH	43 1⁄8 in.	14 1⁄16 in.	2 5⁄16 in.

Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Weight	Stock Locations				Pallet Qty	Equivalency	DLC Listing
								CA	GA	IL	NJ			
93133326	CLB2-40LX-W-EDU	840141402871	10,527	4000K	139	75.9	5.8lbs.	•	•			78	4 Lamp T8	PL6V0UBASM2L
93133333	CLB2-50LX-W-EDU	840141402949	10,477	5000K	142	73.7	5.8lbs.	•	•			78	4 Lamp T8	PL8UGF53K5DY
93133327	CLB2-40MM-W-EDU	840141402888	15,091	4000K	151	100.2	5.8lbs.	•	•			78	6 Lamp T8	PL8KD4HFZGL1
93133334	CLB2-50MM-W-EDU	840141402956	13,717	5000K	139	98.9	5.8lbs.	•	•			78	6 Lamp T8	PLMOUNY6HUBH
93133328	CLB2-40MH-W-EDU	840141402895	20,831	4000K	135	153.9	6.2lbs.	•	•			78	6 Lamp T8	PL7FUT52HFUY
93133335	CLB2-50MH-W-EDU	840141402963	22,297	5000K	150	148.7	6.2lbs.	•	•			78	6 Lamp T8	PLYE2WFMYT6C
93133329	CLB2-40MV-W-EDU	840141402901	26,364	4000K	138	191.2	9.6lbs.	•	•			52	6 Lamp T5HO	PLOI8O6DN40G
93133336	CLB2-50MV-W-EDU	840141402970	29,674	5000K	148	201.0	9.6lbs.	•	•			52	6 Lamp T5HO	PLFEWT7AA4Z1
93133330	CLB4-40MX-W-EDU	840141402918	35,051	4000K	145	240.9	10.5lbs.	•	•			39	6 Lamp T5HO	PLEVB9Q6JSID
93133337	CLB4-50MX-W-EDU	840141402987	37,145	5000K	154	242.0	10.5lbs.	•	•			39	6 Lamp T5HO	PLCTB0Y2MJR3
93133331	CLB4-40HM-W-EDU	840141402925	42,810	4000K	143	299.0	12.4lbs.	•	•			39	8 Lamp T5HO	PLUAK4BA0QRI
93133338	CLB4-50HM-W-EDU	840141402994	44,006	5000K	146	301.6	12.4lbs.	•	•			39	8 Lamp T5HO	PLDLAKIQAB7F
93133332	CLB4-40HH-W-EDU	840141402932	57,047	4000K	147	388.2	18.83lbs.	•	•			52	8 Lamp T5HO	PLDSM0CGLRQB
93133339	CLB4-50HH-W-EDU	840141403007	55,637	5000K	141	393.7	18.83lbs.	•	•			52	8 Lamp T5HO	PL2DC31EJ7F7
Accessories														
LHVQM5	LHVQM5	078531012670	–	–	–	–	0.75lbs.	•	•	•		–	–	–
LHVQM10	LHVQM10	078531012526	–	–	–	–	1.5lbs.	•	•	•		–	–	–
93133342	CLB-SMB	840141403038	–	–	–	–	0.6lbs	•				–	–	–

LINEAR HIGH BAY

PRODUCT SELECTION GUIDE

		GOOD		BEST	
FEATURES		tradeSELECT [®]		High-Spec Linear High Bay	
		CLB		PEL	
	Length	2'	4'	2'	4'
		Yes	Yes	Yes	Yes
	Mounting Height	Up to 60'		Up to 60'	
	Lumens (maximum)	10,000- 57,000		8000–60,000	
	Efficacy (maximum LPW)	137–158		146–177	
	CRI	80		80+	
	CCT	4000K, 5000K		3000K, 3500K, 4000K, 5000K	
	Wattage	75–388W		50–410W	
	Voltage	120–277, 347–480*		120–277V, 347V, 480V	
	Distribution	Wide, Narrow*		Narrow, Wide, Lambertian	
	Lens	Polycarbonate		No Lens, Acrylic, Polycarbonate	
	Uplight	No		Yes	
	Temperature Range	-40° to 50° C		-40°C to 65°C	
INTEGRATED CONTROLS	Dimming	0-10V Dimming to 10%		0–10V Dimming to 5%	
	Ratings	Damp Location, IP4X, IK10 Impact		Damp Location	
	Emergency Battery Pack	15W*		10W, 20W	
	Equivalency	100W to 1000W HID & 4–lamp T8, 8–lamp T5HO		100W to 1000W HID & 4–lamp T8, 8–lamp T5HO	
	DLC [®] DesignLights Consortium	Yes		Yes	
USES	Buy America(n) Solutions	–		TAA FAR §52.225-11	
	Standalone Occupancy & Daylighting	Yes*		Yes	
	NX Standalone Occupancy & Daylighting	–		Yes	
	NX Networked Occupancy & Daylighting	–		Yes	
	PowerHUBB [™]	–		–	
	Applications	Industrial, Gymnasium, Warehouse, Big Box Retail		Industrial, Gymnasium, Warehouse, Big Box Retail	


DLC[®] (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

*Available as MTO Option, coming Q2 2021

CRN2

WET LOCATION HIGH BAY

- An efficient wet location high bay offers lumen packages from 14,000 to 38,000 for proper illumination on a variety of high bay applications.
- Frosted polycarbonate lens standard
 - Clear acrylic, spun aluminum, and diffuse acrylic reflector options
 - Up to 144 lumens per watt
 - Wet Location, IP66, & IK10 Impact Rated
 - 6' power cord standard
 - Universal Voltage, 120–277V

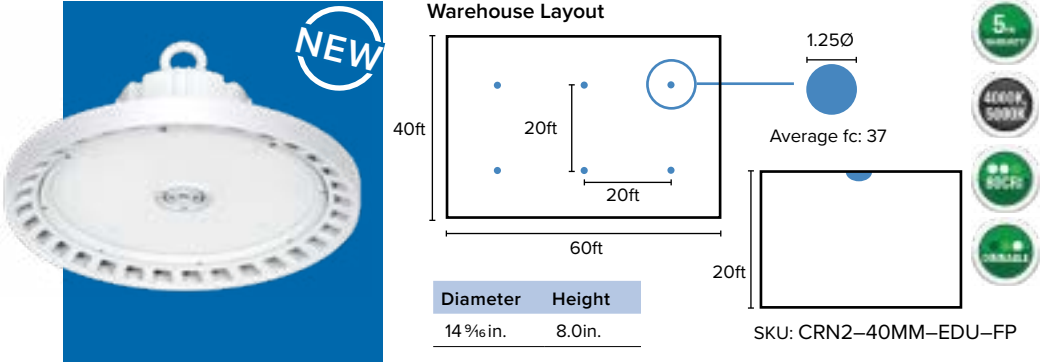


Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Weight	Stock Locations				Pallet Qty	Equivalency	DLC Listing
								CA	GA	IL	NJ			
93130226	CRN2-40LX-EDU-FP	840141400372	14444	4000K	144	100	9.4lbs.	•	•			20	250W MH	PLD4D9C4TT12
93130227	CRN2-50LX-EDU-FP	840141400389	14444	5000K	144	100	9.4lbs.	•	•			20	250W MH	PLMXW9SIH9GO
93130228	CRN2-40MM-EDU-FP	840141400396	21702	4000K	144	150	9.9lbs.	•	•			20	400W MH	PL0SB3M6IM8M
93130229	CRN2-50MM-EDU-FP	840141400402	21702	5000K	144	150	9.9lbs.	•	•			20	400W MH	PLQFEIJXTEXO
93130230	CRN2-40MV-EDU-FP	840141400419	27856	4000K	139	200	10.2lbs.	•	•			20	750W MH	PLVGLQK2PPY7
93130231	CRN2-50MV-EDU-FP	840141400426	27856	5000K	139	200	10.2lbs.	•	•			20	750W MH	PL20WICFYC2B
93130232	CRN2-40MX-EDU-FP	840141400433	34202	4000K	139	245	11lbs.	•	•			20	750W MH	PLD3J1K70V78
93130233	CRN2-50MX-EDU-FP	840141400440	34202	5000K	139	245	11lbs.	•	•			20	750W MH	PL21IBZS1WPP
93130234	CRN2-40HM-EDU-FP	840141400457	37927	4000K	140	270	11.5lbs.	•	•			20	1000W MH	PLBPSWQ730FZ
93130235	CRN2-50HM-EDU-FP	840141400464	37927	5000K	140	270	11.5lbs.	•	•			20	1000W MH	PLDWQWFO8QQV
Accessories														
93097503	CRNAL18	785988043002	–	–	–	–	1.7lbs.	•				–	–	–
93097504	CRNWA18	785988043019	–	–	–	–	3.3lbs.	•				–	–	–
93097502	CRNWW18	785988042999	–	–	–	–	3.3lbs.	•				–	–	–
93130248	CRN2-YM	840141400594	–	–	–	–	1.10lbs.	•				–	–	–
93130249	CRN2-YOKE-ADPT	840141400600	–	–	–	–	0.08lbs.	•				–	–	–
93130250	CRN2-SNAPHOOK	840141400617	–	–	–	–	0.07lbs.	•				–	–	–
93130251	CRN2-TLR	840141400624	–	–	–	–	0.06lbs.	•				–	–	–
93130252	CRN2-HBMS-REMOTE	840141400631	–	–	–	–	0.07lbs.	•				–	–	–
93130254	CRN2-ELL25	840141400655	–	–	–	–	15lbs.	•				–	–	–

CRB

WET LOCATION HIGH BAY

- CRB is a compact wet location round highbay suitable for a variety of bay lighting applications including mezzanines and garden centers.
- Durable die-cast aluminum housing and polycarbonate lens
 - Lumen packages from 14,000–34,000
 - Up to 143 lumens per watt
 - Wet Location, IP66, & IK07 Impact Rated
 - 4000K and 5000K options and 80 CRI
 - -30°C to 50°C ambient operating temperature range

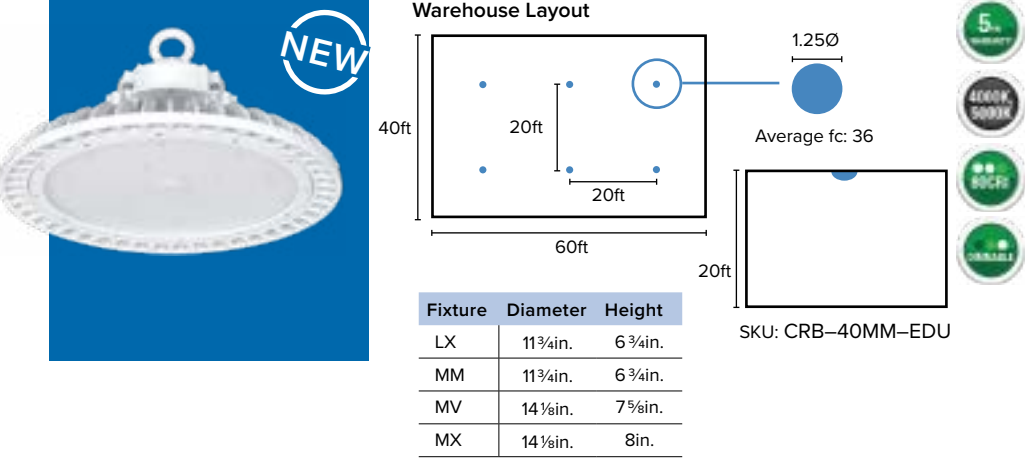

Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Weight	Stock Locations				Pallet Qty	Equivalency	DLC Listing
								CA	GA	IL	NJ			
93130916	CRB-40LX-EDU	840141401461	14107	4000K	139	100	6.6lbs.	6.6	•			60	250W MH	PLHP3OJW8L5Q
93130917	CRB-40MM-EDU	840141401478	21349	4000K	140	150	6.7lbs.	6.7	•			60	400W MH	PLA8SQ7ISZNI
93130918	CRB-40MV-EDU	840141401485	28739	4000K	143	200	9.5lbs.	9.5	•			30	750W MH	PLD9DM1993AW
93130919	CRB-40MX-EDU	840141401492	34603	4000K	143	240	9.9lbs.	9.9	•			30	750W MH	PL364AKTVQ2B
93130920	CRB-50LX-EDU	840141401508	14107	5000K	139	100	6.6lbs.	6.6	•			60	250W MH	PLBL6OYBSP4C
93130921	CRB-50MM-EDU	840141401515	21349	5000K	140	150	6.7lbs.	6.7	•			60	400W MH	PLIMNBGRCTXMZ
93130922	CRB-50MV-EDU	840141401522	28739	5000K	143	200	9.5lbs.	9.5	•			30	750W MH	PLE3JEJHZOII
93130923	CRB-50MX-EDU	840141401539	34603	5000K	143	240	9.9lbs.	9.9	•			30	750W MH	PLDZLCKFOU1R

ROUND HIGH BAY

PRODUCT SELECTION GUIDE

		GOOD		BETTER
FEATURES		tradeSELECT[®]  CRB	tradeSELECT[®]  CRN2	Mid-Spec Round High Bay  UTB2
	Diameter	11.75"14.13"	14.56"	16"
	Mounting Height	Up to 40'		Up to 40'
	Lumens (maximum)	14,000–34,000	14,000–36,000	12,000–30,000
	Efficacy (maximum LPW)	139–143	124–144	106–162
	CRI	80	80	80+
	CCT	4000K, 5000K	4000K, 5000K	3000K, 3500K, 4000K, 5000K
	Wattage	100–240W	100–270W	84–190W
	Voltage	120–277V	120–277V; 347–480V	120–277V, 120V, 208V, 240V, 277V, 347V, 480V
	Distribution	–	Reflector: Clear, Diffuse, Aluminum	Reflector: Clear Acrylic, Translucent White, Suspended Bead, Anodized Aluminum, No Optic
	Lens	Glass, Frosted Polycarbonate	Glass, Frosted Polycarbonate	Conical Drop Lens Dropped Lens Refractor, Frosted Acrylic Lens, None
	Temperature Range	-30°C to 50°C	-40°C to 55°C	-35°C to 65°C
	Dimming	0–10V Dimming to 10%	0–10V Dimming to 10%	0–10V Dimming to 10%
	Ratings	Wet Location, IP66, IK07 Impact	Wet Location, IP66, IK10 Impact	Damp Location
INTEGRATED CONTROLS	Emergency Battery Pack	25W Field Installable	25W Field Installable	10W
	Equivalency	250W to 750W HID	250W to 1000W HID	175W to 750W HID
	DLC [®] DesignLights Consortium	Yes	Yes	Yes
	Standalone Occupancy & Daylighting	–	Yes	Yes
USES	NX Standalone Occupancy & Daylighting	–	–	Yes
	NX Networked Occupancy & Daylighting	–	–	Yes
	PowerHUBB [™]	–	–	–
	Applications	Industrial, Gymnasium, Warehouse, Big Box Retail, Garden Center	Industrial, Gymnasium, Warehouse, Big Box Retail, Garden Center	Industrial, Gymnasium, Warehouse, Big Box Retail

DLC[®] (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

