

LED Adjustable Architectural Slim Wall Packs

SPEC SHEET



Adjustable LED Slim Wall Packs Delivering Full Cutoff or Semi Cutoff Light Distribution

The innovative pivoting head design aims the light precisely and adjusts up to 20 degrees for forward throw illumination. Suitable for up to 25 foot mounting for applications including pathways, perimeter lighting and building entryways. Available in 30W, 40W (small), and 70W, 90W (large) with CCT of 5000K.

FEATURES

- Architectural low profile design
- Dark sky compliant
- Bronze finish
- Includes photocell for 120-277V operation
- Min start temperature: -40°C
- Heat & impact resistant polycarbonate lens
- 5 year limited warranty

APPLICATIONS

- Condos/Apartments
- Hotels
- Security Lighting
- Exterior Walls



Job Name/Title: _____ Catalog Number _____
Contractor: _____ Notes: _____

LED Adjustable Architectural Slim Wall Packs

SPEC SHEET

GENERAL SPECIFICATIONS


Input Voltage: 120-277V, 60Hz
Functional Life (L70) : 50,000 hours
CRI: 70
CCT: 5000K
Ambient Operating Temp: -40°F to 105°F
Power Factor: >.90
THD: <.15%



30W & 40W




30W Full Cutoff Wall Pack Footcandles On The Ground

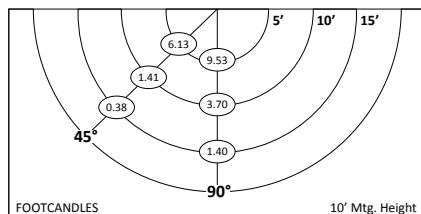


FULL CUTOFF WALL PACK FOOTCANDLES ON THE GROUND							
Mtg. Hgt.	90°			45°			Avg. FCs 450 sq.ft.
	5'	10'	15'	5'	10'	15'	
10'	9.53	3.70	1.40	6.13	1.41	0.38	3.76
15'	4.98	3.26	1.63	4.02	1.66	0.63	2.70

70W Full Cutoff Wall Pack Footcandles On The Ground

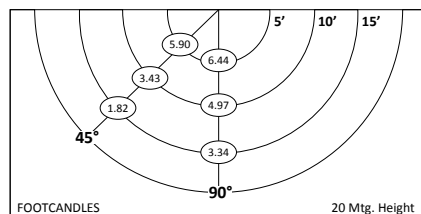


FULL CUTOFF WALL PACK FOOTCANDLES ON THE GROUND							
Mtg. Hgt.	90°			45°			Avg. FCs 450 sq.ft.
	5'	10'	15'	5'	10'	15'	
20'	6.44	4.97	3.34	5.90	3.43	1.82	4.32
25'	4.34	3.48	2.74	4.09	2.83	1.71	3.20

40W Full Cutoff Wall Pack Footcandles On The Ground

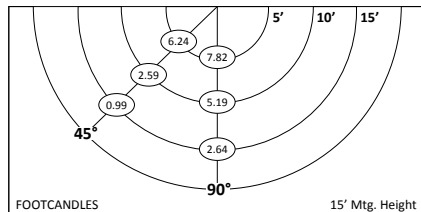

FULL CUTOFF WALL PACK FOOTCANDLES ON THE GROUND							
Mtg. Hgt.	90°			45°			Avg. FCs 450 sq.ft.
	5'	10'	15'	5'	10'	15'	
15'	7.82	5.19	2.64	6.24	2.59	0.99	4.25
20'	4.57	3.71	2.49	4.01	2.33	1.13	3.04

90W Full Cutoff Wall Pack Footcandles On The Ground

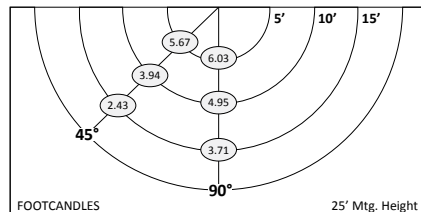

FULL CUTOFF WALL PACK FOOTCANDLES ON THE GROUND							
Mtg. Hgt.	90°			45°			Avg. FCs 450 sq.ft.
	5'	10'	15'	5'	10'	15'	
25'	6.03	4.95	3.71	5.67	3.94	2.43	4.46
30'	4.29	3.65	3.10	4.09	3.14	2.13	3.40



70W & 90W



SPECIFICATIONS / ORDER INFO

Catalog Number	Product Code	UPC	Lumens	Wattage	HID Equiv.*	IES Type Dist.	DLC Classification	DLC ID	Case Qty
F-AWP/30/50K/BZ-80	70743	751338017634	3,000	30W	100W	II	---	---	1/6
F-AWP/40/50K/BZ-80	70744	751338017641	4,500	40W	175W	II	Standard	P2757QBM	1/6
F-AWP/70/50K/BZ-80	70745	751338017658	7,800	70W	250W	III	Standard	P57XXJSE	1
F-AWP/90/50K/BZ-80	70746	751338017665	10,500	90W	320W	III	Standard	PETG6QDN	1

NOMENCLATURE

Example: **F-AWP/30/50K/BZ**

F=Fixture / **AWP**=Adjustable Wall Pack / **30**=30 Watts / **50K**=5000K CCT / **BZ**=Bronze Finish

*Equivalent wattage shown depends on application and fixture. Specifications subject to change without notice.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Revised November 2020