

Rigid Conduit Bodies with Cover and Gasket

Threaded C Type

Features

- Threaded C type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

Applications


- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket- Neoprene rubber

Standard Finish

- Powder coat

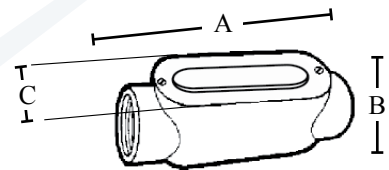

Catalog Number	UPC	Size	Wire Size		Unit Carton	Ship Case	Weight/Case	A	Inches B	C
			Max. Number	Max. Size						
C1CG	19901	1/2"	1	6 AWG	10	100	30	4.720	1.370	1.330
C2CG	19911	3/4"	2	6 AWG	10	50	25	5.570	1.625	1.540
C3CG	19921	1"	3	6 AWG	5	25	18	6.460	1.900	1.740
C4CG	19931	1-1/4"	3	2 AWG	2	10	17	8.528	2.770	2.490
C5CG	19941	1-1/2"	3	2 AWG	2	10	19	8.528	2.770	2.490
C6CG	19951	2"	3	2/O AWG	1	5	14	10.831	3.335	3.100
C7CG	19961	2-1/2"	3	4/O AWG	---	1	7	13.500	4.060	4.450
C8CG	19971	3"	3	250 MCM	---	1	7	13.500	4.685	4.450
C9CG	19981	3-1/2"	3	350 MCM	---	1	10	15.937	5.450	5.500
C10CG	19991	4"	4	350 MCM	---	1	10	15.937	5.450	5.500