

## LED Warehouse/Industrial Lighting

### High Ambient Temperature LED UFO Luminaire

#### Features


- Suitable for high temperature applications
- Built-in cooling fins provide maximum heat dissipation
- Die cast hook mount standard for ease of installation
- Heat & impact resistant polycarbonate lens
- Motion sensor version (HTS version)
- UL certified per NSF/ANSI Standard 2 - Food Equipment for use in Splash Zone Applications
- 0-10 Dimming\*

#### Specs


- 127 Lumens Per Watt (LPW)
- 70 CRI
- 120° Beam Angle
- 50,000 Average Rated Life
- -40°F to 145°F ambient rating

#### Applications

- Warehouses, gymnasiums, industrial lighting

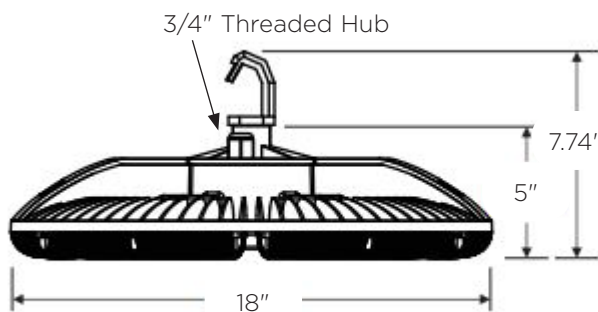

Optional Wire  
Safety Guard

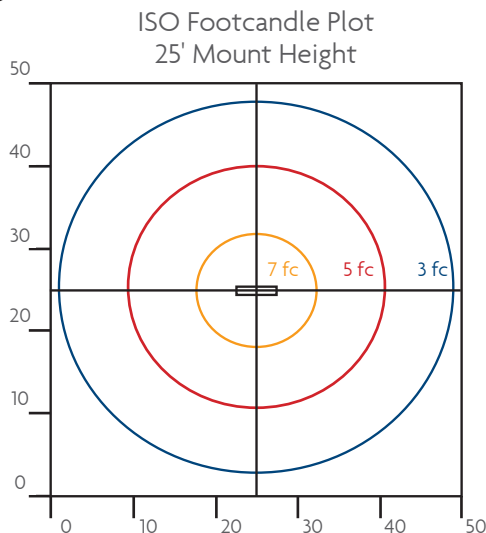

| Catalog Number             | Product Code | Color Temp | Watts | Volts   | Lumens | Equiv Wattage  | Case Qty | DLC ID   |
|----------------------------|--------------|------------|-------|---------|--------|----------------|----------|----------|
| <b>F-LUHB150/50/HT</b>     | 74132        | 5000K      | 150   | 120-277 | 19,113 | Up to 400W HID | 1        | P2QNVGUA |
| <b>F-LUHB150/50/HT/480</b> | 74137        | 5000K      | 150   | 480     | 19,113 | Up to 400W HID | 1        | PXFSSPKC |
| <b>F-LUHB150/50/HTS</b>    | 74138        | 5000K      | 150   | 120-277 | 19,113 | Up to 400W HID | 1        | P2QNVGUA |

#### Optional 10-PK Wire Safety Guard

**F-LUHB/HT-Guard** 74150 (UPC:751338018525)

Specifications are subject to change without prior notice. \*Dimming with standard 0-10V dimmer, such as Leviton, IP710, DS710 or Lutron DVSTV.