

DESCRIPTION

High efficiency, low brightness 6-inch aperture wide beam reflector for use with compact fluorescent lamps. The precisely formed non-imaging optical reflector ensures 55° cutoff to lamp and lamp image and the one piece design eliminates light leaks at the ceiling. Standard features include low iridescent finish on all reflector colors and venting to ensure maximum lamp life and lumen output. Optics offer unparalleled performance in glare free lighting with a smooth beam devoid of hot spots. Wide beam and medium beam downlight, lens, and open wall wash reflectors are interchangeable within the same housing.

SPECIFICATION FEATURES

Optical Reflector

.050 thick aluminum, in a one piece spun parabolic contour. Available in a variety of Alzak® finishes. Also available with white or black baffle. Positive reflector mounting, without tools, pulls trim tight to ceiling.

Mechanical Housing Mounting Frame

One piece precision die cast aluminum 1-1/2" deep collar accommodates varying dimensions of ceiling materials.

Universal Mounting Bracket

Accepts 1/2" EMT, C Channel, T bar fasteners, and bar hangers. Adjusts 5" vertically from above or below ceiling.

Conduit Fittings

Die cast screw tight connectors.

Junction Box

Listed for eight #12AWG (four in, four out) 90°C conductors feed through branch wiring. 1/2" and two 3/4" pry outs. Positioned to allow straight conduit runs. Access to junction box by removing reflector.

Trim Ring Options

Self flanged or molded white trim ring. Rimless trim ring accessory available.

Socket Connector

One piece die cast aluminum connection allows venting for maximum thermal performance.

Rotary Lock Socket

4-pin GX24q3/4 fatigue free stainless steel lamp spring ensures positive lamp retention.

Electronic Ballast with Quick Disconnect

Electronic ballast provides full light output and rated lamp life. Provides flicker free and noise free operation and starting. End of lamp life protection is standard.

Labels


cULus listed, standard damp label. Electronic ballast housings include peel down wattage label from 42W down to 26W allowing de-rating to meet max wattage requirements. Meets IECC, ASHRAE, and Title 24 commercial standards.





CD6113
CD6118
CD6126
CD6142
6CH142

13W, 18W or 26W DTT
26W, 32W, 42W TTT or PLT
Compact Fluorescent

6-Inch Horizontal Downlight

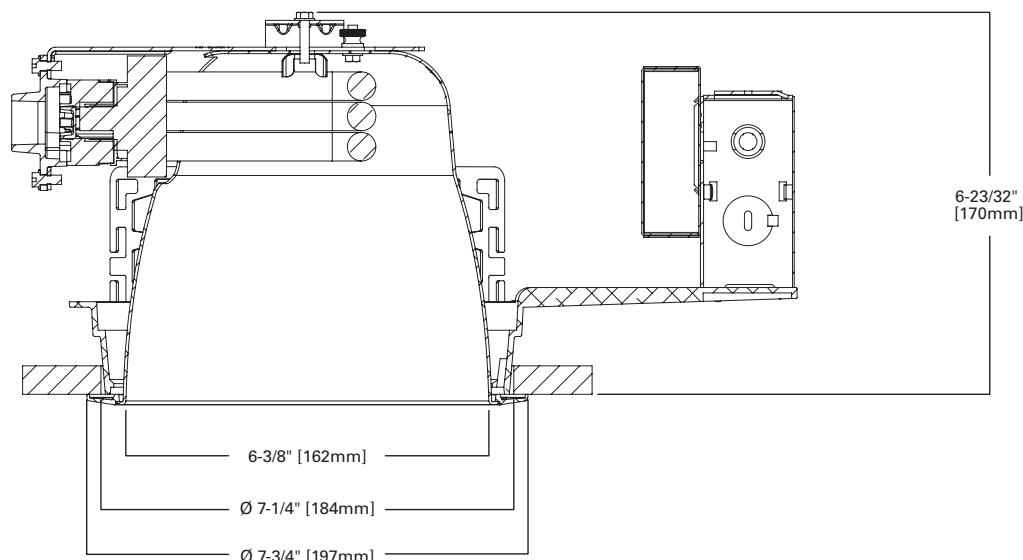

Top View

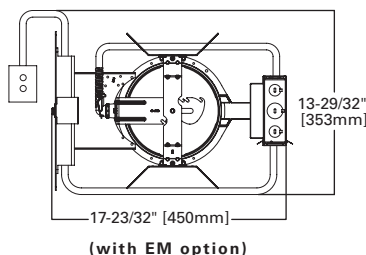


EXAMPLE: CD6142E 6CH1421LI

Housing	Ballast	Options	Trims	Finish	Option	Accessories
CD6142=6" Horizontal 26/32/42W TTT Lamp CD6126=6" Horizontal 26W DTT Lamp CD6118=6" Horizontal 18W DTT Lamp=6" CD6113 Horizontal 13W DTT Lamp	E=120/277V 50/60 Hz Electronic 3E=347V 50/60 Hz Electronic EDR26=26W Derated label electronic EDR32=32W Derated label electronic D5LT=18 or 26W 120-277V Fifth Light (DALI) Dimmingfor (CD6118 or CD6126 only) D5LT42=42W 120-277V Fifth Light (DALI) Dimming D5LT32=32W 120-277V Fifth Light (DALI) Dimming (CD6142 only) D5LT26=26W 120-277V Fifth Light (DALI) Dimming (CD6142 only) 3D5LT32=32W 347V Fifth Light (DALI) Dimming (CD6142 only) 3D5LT26=26W 347V Fifth Light (DALI) Dimming (CD6142 only) 3D5LT=26W 347V Fifth Light (DALI) Dimming for (CD6126 only) D42=42W 120-277V Dimming , Lutron EcoSystem/3-Wire Control (Factory Wired for 3-Wire) D26/32=26 or 32W 120-277V Dimming, Lutron EcoSystem/3-Wire Control (Factory Wired for 3-Wire) D=120-277V Dimming Lutron EcoSystem/ 3-Wire Control (Factory Wired for 3-Wire) D26MARKVII=26W 120-277V Advance MARK7 D32MARKVII=32W 120-277V Advance MARK7 D42MARKVII=42W 120-277V Advance MARK7 DMARKVII=18W or 26W 120-277V Advance MARK 7 (CD6118 or CD6126 only) 1D26MARKX=26W 120V Advance MARK 10 1D32MARKX=32W 120V Advance MARK 10 1D42MARKX=42W 120V Advance MARK 10 2D26MARKX=26W 277V Advance MARK 10 2D32MARKX=32W 277V Advance MARK 10 2D42MARKX=42W 277V Advance MARK 10 1DMARKX=18W or 26W 120V Advance MARK 10 (CD6118 or CD6126 only) 2DMARKX=18W or 26W 277V Advance MARK 10 (CD6118 or CD6126 only)	CP=Chicago Plenum EM=Emergency Module with remote test switch ² IEM=Emergency Module with Integral test switch ²	6CH1421=6" Reflector Self Flanged 6CH1420=6" Reflector Polymer Trim Ring 6CH1421E=6" Reflector Self Flanged, for Integral Emergency 6CH1420E=6" Reflector Polymer Trim Ring, for Integral Emergency	Alzak® Finishes LI=Specular Clear H=Semi-Specular Clear WMH=Warm Haze G=Gold WH=Wheat WHH=Wheat Haze GP=Graphite GPH=Graphite Haze B=Black Painted Finishes W=Gloss White WB=White Baffle (polymer trim ring only) BB=Black Baffle (polymer trim ring only)	WF=White Painted Flange	HB26=C Channel Bar Hangers, 26" Long, Pair HB50=C Channel Bar Hangers, 50" Long, Pair TRRC6=Rimless Trim Ring , White ¹ FK5=5 Amp Field Installable Fuse Kit 300V Max RMB22=Wood Joist Bar Hanger, 22" Long, Pair HSAC6=Slope Adapter for 6" Aperture Housings, Specify Slope TRMC6=CFL Metal Trim Ring ¹

Notes: ¹ Order trim with polymer trim ring. ² Not available with Chicago Plenum.
 (Consult specification sheet for ordering information and options).

PHOTOMETRICS

Candlepower Distribution Curve

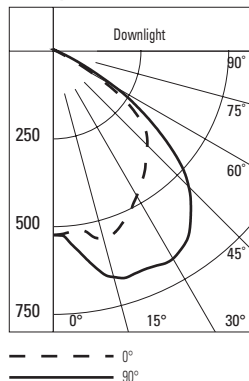

Test No. P13391
 CD6142E 6CH1421LI
 Lumens = 2400
 Efficiency = 64.80%
 Lamp = 32W PLT
 SC (parallel - perpendicular) = 1.46 - 1.71

Cone of Light

Distance Fixture to Lighted Plane	Initial Footcandles at Nadir	L / W	
5.5'	20	7.1'	8.6'
7.5'	11	9.8'	11.8'
8'	10	10.4'	12.6'
10'	6	13.1'	15.6'
12'	4	15.7'	18.8'

Candela Distribution

Degrees Vertical	Candela
0	524
5	518
15	552
25	513
35	443
45	377
55	247
65	27
75	0
85	1
90	0


Zonal Lumen Summary

Zone	Lumens	%Fixture
0-30	516	33.2
0-40	881	56.6
0-60	1506	96.8
0-90	1556	100.0
90-180	0	0.0
0-180	1556	100.0

Luminance

Average Candela/M ²	
Degrees	Avg. 0° Luminance
45	25881
55	20904
65	3101
75	0
85	557

Candlepower Distribution Curve

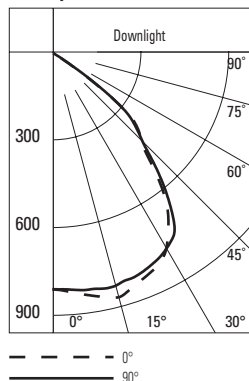

Test No. P13384
 CD6142E 6CH1421LI
 Lumens = 2400
 Efficiency = 66.50%
 Lamp = 32W TTT
 SC (parallel - perpendicular) = 1.29 - 1.39

Cone of Light

Distance Fixture to Lighted Plane	Initial Footcandles at Nadir	L / W	
5.5'	27	6.9'	7.6'
7.5'	14	9.6'	10.2'
8'	13	10.2'	11'
10'	8	12.8'	13.8'
12'	6	15.4'	16.6'

Candela Distribution

Degrees Vertical	Candela
0	802
5	817
15	859
25	812
35	686
45	427
55	154
65	9
75	2
85	1
90	0

Zonal Lumen Summary

Zone	Lumens	%Fixture
0-30	673	42.1
0-40	1095	68.6
0-60	1583	99.1
0-90	1596	100.0
90-180	0	0.0
0-180	1596	100.0

Luminance

Average Candela/M ²	
Degrees	Avg. 0° Luminance
45	29314
55	13033
65	1034
75	375
85	557