



UltraCon®+
Blue
Carbon Steel
3/16" & 1/4"
Diameters



UltraCon®+
Bronze
Carbon Steel
3/16" & 1/4"
Diameters



UltraCon®+
White
Carbon Steel
3/16" & 1/4"
Diameters



UltraCon®
Silver
Carbon Steel
5/16" Diameter



UltraCon® SS4
410 Stainless Steel
1/4" Diameter



Crete-Flex®
410 Stainless Steel
3/16" & #14
Diameters



Aggre-Gator®
304 Stainless Steel
1/4" Diameter

TYPICAL APPLICATIONS

- ▶ Temporary bracing
- ▶ Conduit clips
- ▶ Sill plate
- ▶ Window frames
- ▶ Furring strips
- ▶ Storm shutters

BASE MATERIALS



Normal Weight Concrete



Masonry



Brick



Chemically Treated Lumber



Wood

Normal Weight Concrete	Masonry	Brick	Chemically Treated Lumber	Wood
UltraCon+	UltraCon+	UltraCon+	UltraCon+	UltraCon+
UltraCon (5/16")	UltraCon (5/16")			UltraCon (5/16")
Aggre-Gator	Aggre-Gator		Aggre-Gator	
Crete-Flex	Crete-Flex			
UltraCon SS4	UltraCon SS4			

**CARBON STEEL & STAINLESS STEEL
CONCRETE SCREW ANCHORS**

Concrete Screws

STALGARD ADVANTAGE:

SUPERIOR CORROSION RESISTANCE

[illegible]

■ NEW CONDITIONED FASTENER


FASTENER PROTECTED / ZINC OXIDE

FASTENER DAMAGED / IRON OXIDE

ITW and Tapcon® are registered trademarks of Illinois Tool Works, Inc.

ADVANTAGES OF GIMLET POINT

➤ Gimlet points provide extra bite into wood.

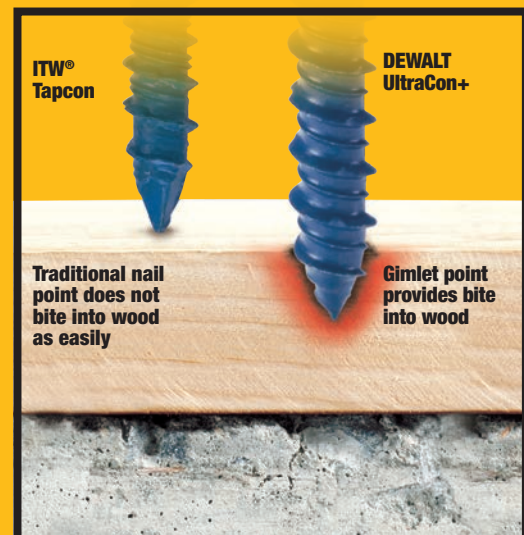

THE MOST ICC-ES APPROVALS FOR MECHANICAL AND ADHESIVE ANCHORS IN THE INDUSTRY

CONCRETE SCREW APPROVALS



ESR-3068 Concrete
ESR-3196 Masonry
ESR-3213 Chemically Treated Lumber
ESR-3042 Wood-to-Wood



Miami-Dade NOA
Notice of
Acceptance



Florida
Building
Code

UltraCon+*	UltraCon+	UltraCon+
	UltraCon (5/16")	UltraCon (5/16")
	Aggre-Gator	Aggre-Gator
	Crete-Flex	Crete-Flex
	UltraCon SS4	UltraCon SS4

*3/16" & 1/4" carbon steel UltraCon+ diameters are ICC approved in select lengths



➤ UltraCon+ ICC-ES Approved for use in concrete, masonry, chemically treated lumber and wood-to-wood applications.

HEADSTYLE OFFERINGS

	COLOR	HEX WASHER	HEX TRIMFIT	HEX FLANGE	PHILLIPS FLAT	PHILLIPS TRIMFIT	PHILLIPS OVERSIZED	SIZE RANGE
UltraCon®+	Blue Stalgard Coating							Hex Washer Head: 3/16" x 1-1/4" to 3/16" x 4" 1/4" x 1" to 1/4" x 6" Phillips Flat Head: 3/16" x 1-1/4" to 3/16" x 4" 1/4" x 1-1/4" to 1/4" x 6"
	White Stalgard Coating							Hex Washer Head: 3/16" x 1-1/4" to 3/16" x 3-1/4" 1/4" x 1-1/4" to 1/4" x 6" Hex Flange Head: 1/4" x 1-3/4" to 1/4" x 3-1/4" Phillips Flat Head: 3/16" x 1-1/4" to 3/16" x 3-3/4" 1/4" x 1-1/4" to 1/4" x 3-1/4" Phillips Trimfit Head: 1/4" x 1-3/4" to 1/4" x 4"
	Silver Stalgard Coating							Hex Washer Head: 1/4" x 1-1/4" to 1/4" x 3-1/4" Hex Flange Head: 1/4" x 1-3/4" to 1/4" x 3-1/4" Phillips Flat Head: 3/16" x 1-1/4" to 3/16" x 3-3/4" 1/4" x 1-1/4" to 1/4" x 4"
	Bronze Stalgard Coating							Phillips Trimfit Head: 3/16" x 2-3/4" to 3/16" x 2-3/4" 1/4" x 2-3/4" to 1/4" x 4"
UltraCon® (5/16")	Silver Stalgard Coating							Hex Washer Head: 5/16" x 1-3/4" to 5/16" x 6" Hex Trimfit Washer Head: 5/16" x 1-3/4" to 5/16" x 3-3/4" Phillips Flat Head: 5/16" x 2-1/4" to 5/16" x 6" Phillips Trimfit Head: 5/16" x 2-1/4" to 5/16" x 5"
Crete-Flex®	Silver Stalgard Coating							Hex Washer Head: 3/16" x 1-1/4" to 3/16" x 2-3/4" #14 x 1-1/4" to #14 x 3-3/4" Hex Flange Head: #14 x 1-3/4" to #14 x 2-1/4" Phillips Flat Head: 3/16" x 1-1/4" to 3/16" x 3-1/4" #14 x 1-1/4" to #14 x 6" Phillips Trimfit Head: #14 x 1-3/4" to #14 x 2-3/4"
Aggre-Gator®	Silver Stalgard Coating							Hex Washer Head: 1/4" x 1-1/4" to 1/4" x 4" Phillips Trimfit Head: 1/4" x 1-1/4" to 1/4" x 4"
UltraCon® SS4	Silver Stalgard Coating							Hex Washer Head: 1/4" x 1-1/4" to 1/4" x 6" Phillips Flat Head: 1/4" x 1-1/4" to 1/4" x 4"

DEWALT®



GET THE
SYSTEM

OSHA COMPLIANT

1926.1153

DRILL / FASTEN



DCH273
20V MAX® XR Brushless 1" L-Shape
SDS Plus Rotary Hammer



DCH263
20V MAX XR Brushless
1-1/8" D-Handle Rotary Hammer

ACCESSORIES



DWH303DH
Dust Extractor for DCH273
1" L-Shape SDS Plus
Rotary Hammer



DWH205DH
Dust Extractor for DCH263
1-1/8" D-Handle SDS Plus
Rotary Hammer



DWH050
Large Hammer Dust Extraction
- Hole Cleaning



DWH200D
Dust Extraction Tube Kit
With Hose

EXTRACTORS



DCV585
Flexvolt® 60V MAX®
Dust Extractor



DWH161D1
20V MAX® Brushless
Universal Dust Extractor Kit



DWV010
8 Gallon Wet/Dry HEPA/
RRP Dust Extractor



DWV012
10 Gallon Wet/Dry HEPA/
RRP Dust Extractor

DRILL / DRIVE SYSTEM

DW5366
UltraCon+ Installation Kit:



Case




5/32" UltraCon+ Bit




3/16" UltraCon+ Bit



Drive Sleeve



#2 Phillips Bit



#3 Phillips Bit



1/4" Hex Socket



5/16" Hex Socket

*For 20V MAX® Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

1-800-4-DEWALT

www.DEWALT.com

Copyright ©2019 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWULTRACONSS