

NOTES:
1) OPERATING TEMPERATURE RANGE -40°F - +150°F.
2) POLYCARBONATE ENCLOSURE IS RATED TO NEMA/UL TYPE 1, 2, 3, 3R, 3X, 4, AND 4X.

SCREW: NONE	MATERIAL: NONE	REV: C	ILSCO connections matter 800-776-9775 www.ilsco.com	
CAT. NO.SEE CHART	PLATING: NONE	DRAWN BY:JLC	SCALE: 1/2:1	
INFORMATION SHEET: TBD	MARKING: 	DATE:4/22/2016	SIZE: B	
			DWG NO: R2670	
			SHEET: 1 OF 1	

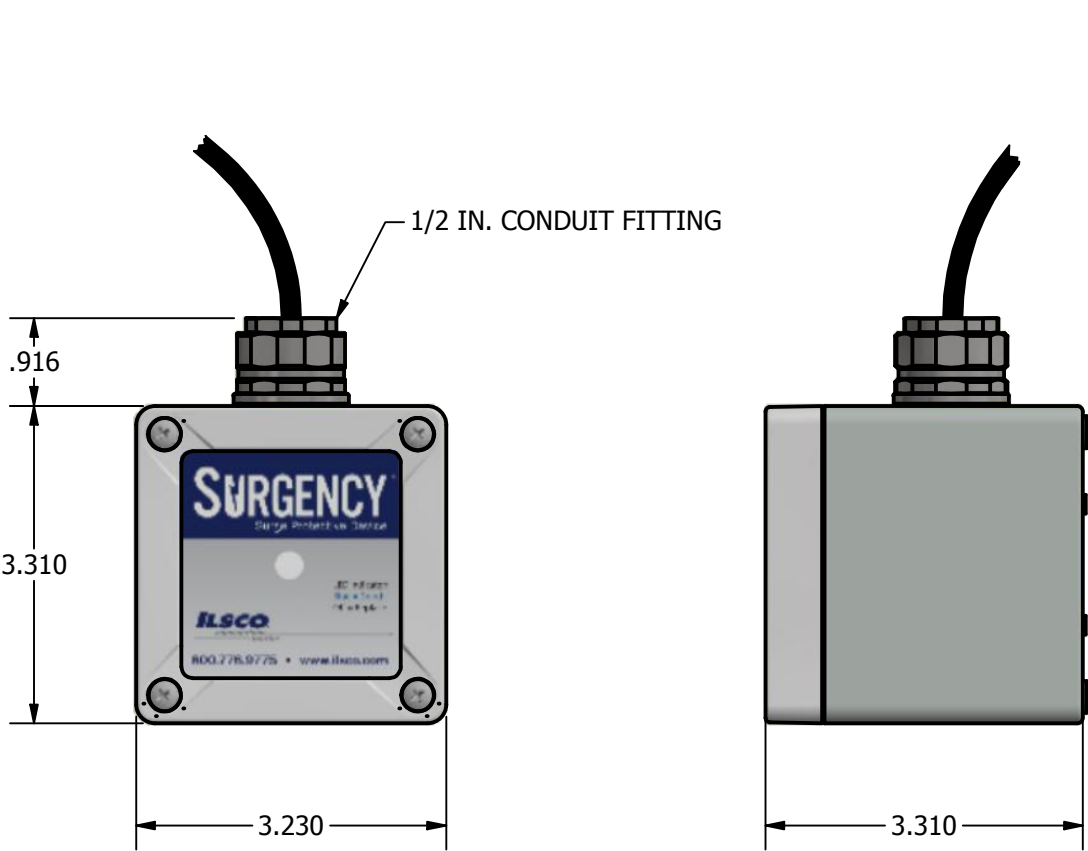


FIGURE 1

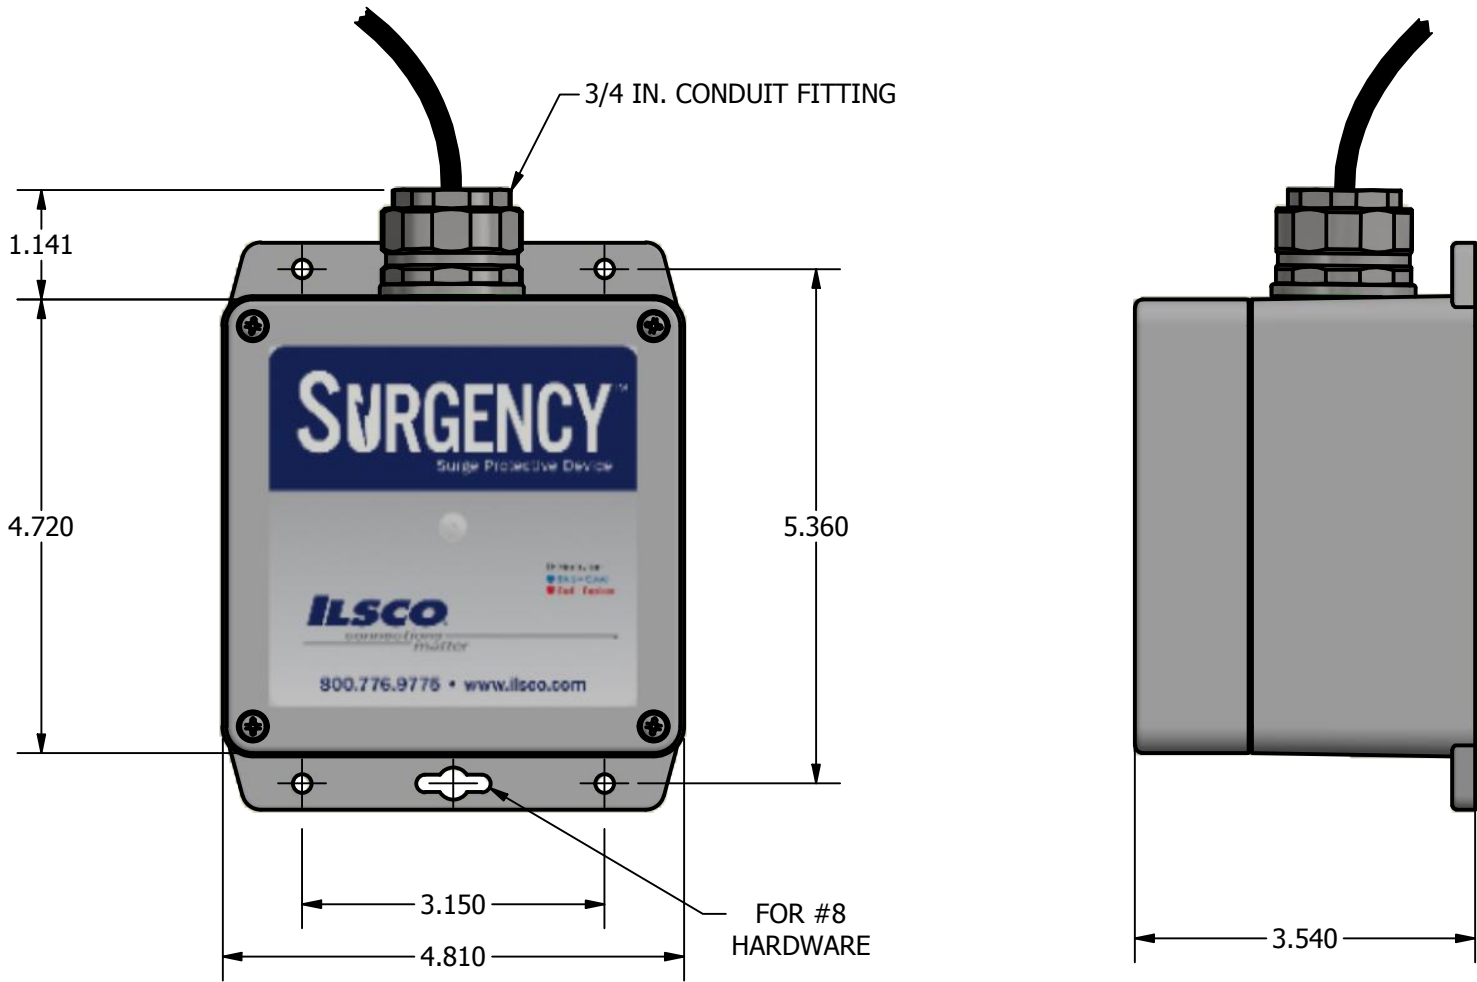


FIGURE 2

CATALOG NUMBER	FIGURE NUMBER	ELECTRICAL CHARACTERISTICS				UL/CSA TYPE	UL 1283 FILTER	CONDUIT SIZE
		PHASE	SYSTEM	AC FREQUENCY	NOMINAL VOLTAGE			
RE-050-1R1X-A	1	1	SPLIT	50/60 Hz	120/240 V	1	NO	1/2 IN
RE-050-1R1X-C	1	1	SPLIT	50/60 Hz	120/240 V	2	YES	1/2 IN
RE-050-1R1X-D2	1	1	SPLIT	50/60 Hz	120/240 V	2	YES	1/2 IN
RE-050-1P1X-A	1	1	SINGLE	50/60 Hz	120 V	1	NO	1/2 IN
RE-050-1P1X-C	1	1	SINGLE	50/60 Hz	120 V	2	YES	1/2 IN
RE-050-Y3WX-A	2	3	WYE	50/60 Hz	208Y/120 V	1	NO	3/4 IN
RE-050-Y3WX-C	2	3	WYE	50/60 Hz	208Y/120 V	2	YES	3/4 IN