


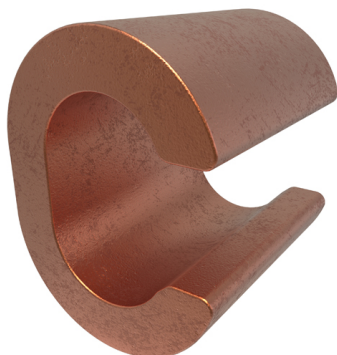

SKU: ULT-1-Z

UPC: 0783669930726

Features & Benefits:

Description:Permaground Copper Grounding C Crimp, Main Conductor Range 10-12 Sol, Tap Range 10-12 Sol, CSA

Specs

Additional Class Attributes

Fixing Type	NA
ILSCOs Die Catalog Number	ILD-238
ILSCOs Die Index Number	238

Dimensions

Height (IN)	0.366
Height BX (IN)	2.25
Height (mm)	9.2964
Length (IN)	0.279
Length (mm)	7.0866
Weight (LB)	0.005
Weight BX (LB)	0.59
Width (IN)	0.32
Width BX (IN)	5
Width (mm)	8.128

Material and Finish

Conductor Material	Copper
Connector Finish	Bare
Material	Copper

Additional Technical Specifications

Conductor Type	Stranded
----------------	----------

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 100
Direct Burial	Yes
Dual Rated	No
NEMA Code	S-588-1
UPC Code	78366993072

Conductor Ranges

Conductor Range CU Solid (Primary, run, main, line)	10 Sol - 12 Sol
Conductor Range CU Solid (Secondary, tap, load)	10 Sol - 12 Sol
Conductor Range CU Stranded (Primary, run, main, line)	10 Str - 12 Str
Conductor Range CU Stranded (Secondary, tap, load)	10 Str - 12 Str

Testing Standards

CSA File Number	LR-29601
CSA Standard	C22.2 No. 65-03
Prop65 Compliance	This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation
UL / CULUS Specification	UL 467 Listed

Environment and Temperature

Temperature Rating	90°C
--------------------	------

Color

Color	Copper
-------	--------

Voltage

Voltage Rating	35 kV
----------------	-------