


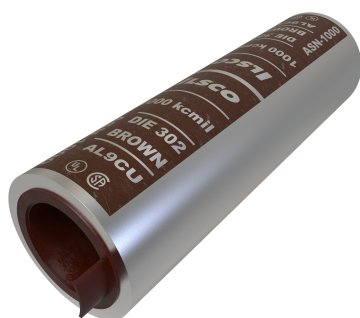

SKU: ASN-1000

UPC: 0783669184877

Features & Benefits:

Description: Surecrimp Aluminum Compression Sleeve, Conductor Size 1000, Tin Plated, UL, CSA

Specs

Additional Class Attributes

Barrel Marking	Hard
Barrel Type	Standard
Connecting Angle	180°
Connection	Compression
Contains DE-OX®	Yes
Flared End	No
ILSCOs Die Index Number	P302
Number of Conductors	1
Sight Window	No
Slotted	No

Dimensions

Height (IN)	1.84
Height BX (IN)	2.25
Height (mm)	46.736
Inside Diameter (IN)	1.18
Inside Diameter (mm)	29.972
Length (IN)	5.992
Length (mm)	152.1968
Outside Diameter (IN)	1.84
Outside Diameter (mm)	46.736
Weight (LB)	0.896
Weight BX (LB)	1.0141
Width (IN)	1.84
Width BX (IN)	4.25
Width (mm)	46.736

Conductor Ranges

Conductor Range AL Stranded (Primary, run, main, line)	1000 kcmil
Conductor Range CU Solid (Primary, run, main, line)	NA
Conductor Range CU Stranded (Primary, run, main, line)	1000 kcmil
Conductor Range AL Solid (Primary, run, main, line)	NA
Expanded Conductor Range	1000 kcmil - 750 kcmil
Flex Conductor Range	NA

Material and Finish

Conductor Material	Copper
Connector Finish	Tin
Material	Aluminum

Additional Technical Specifications

Conductor Type	Stranded
----------------	----------

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 1
Dual Rated	Yes
NEMA Code	S-588-1
UPC Code	78366918487

Bolt and Screw Sizes

Mounting Bolt/Stud Size	NA
-------------------------	----

Testing Standards

CSA File Number	LR-29601
CSA Standard	C22.2 No. 65-03
Prop65 Compliance	This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation
UL Control Number	453G
UL / CULUS Specification	UL 486A/B Listed
UL File Number	E6207

Environment and Temperature

Temperature Rating	90°C
--------------------	------

Color

Color	Silver
Color Code	Brown

Voltage

Voltage Rating	35 kV
----------------	-------