


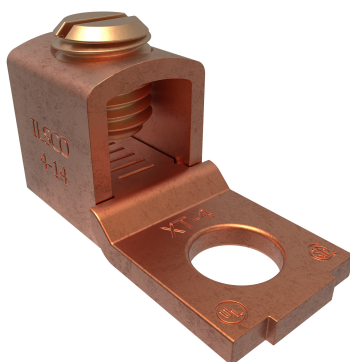

SKU: XT-4DB

UPC: 0783669957570

Features & Benefits:

Description: Copper Mechanical Lug, Conductor Range 4-14, 1 Port, 1 Hole, 1/4 Bolt Size, Direct Bury, UL, CSA

Specs

Additional Class Attributes

Connection	Mechanical
Contains DE-OX®	No
Mounting Hole Type	Thru
Number of Conductors	4
Number of Mounting Holes	1
Number of Poles	1
Number of Ports / Wireways	1

Dimensions

Dimension G (IN)	0.25
Dimension G (mm)	6.35
Drive Size Main	NA
Drive Type Main	Slotted
Height (IN)	0.575
Height BX (IN)	2.25
Length (IN)	1.12
Mounting Hole Diameter (IN)	0.265
Mounting Hole Diameter (mm)	6.731
Tang Length (IN)	0.51
Tang Length (mm)	12.954
Tang Offset (IN)	0.072
Tang Offset (mm)	1.8288
Tang Thickness (IN)	0.082
Tang Thickness (mm)	2.0828
Tang Width (IN)	0.5
Tang Width (mm)	12.7
Weight (LB)	0.041
Weight BX (LB)	5.03
Width (IN)	0.5
Width BX (IN)	5

Material and Finish

Conductor Material	Copper
Connector Finish	NA
Insulation	NA
Material	Copper
Wire Binding Hardware Finish	Bright Dip

Wire Binding Hardware Material

Copper

Additional Technical Specifications

Conductor Type

Stranded

Bolt and Screw Sizes

Mounting Bolt/Stud Size

1/4

Number of Wire Binding Screws per Port

1

Wire Binding Screw Size

3/8

Wire Binding Torque

8 AWG = 40

General

Bag Quantity

1

Carton Quantity Description

STD PACK QTY 100

Direct Burial

Yes

Dual Rated

No

NEMA Code

S-588-3

UPC Code

78366995757

Testing Standards

CSA File Number

LR-29601

CSA Standard

C22.2 No. 65-03

Prop65 Compliance

This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation

UL Control Number

453G

UL / CULUS Specification

UL 486A/B Listed

UL File Number

E6207

Environment and Temperature

Temperature Rating

90°C

Color

Color

Copper

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)

NA

Conductor Range AL Stranded (Primary, run, main, line)

NA

Conductor Range AL Stranded (Secondary, tap, load)

NA

Conductor Range CU Solid (Primary, run, main, line)

10 Sol - 14 Sol

Conductor Range CU Solid (Secondary, tap, load)

NA

Conductor Range CU Stranded (Primary, run, main, line)

4 Str - 14 Str

Conductor Range CU Stranded (Secondary, tap, load)

NA

Conductor Range AL Solid (Primary, run, main, line)

NA

Wire Combinations

(2) 8 Str

Voltage

Voltage Rating

35 kV