



PL-T Triple 4-Pin Base

PL-T 26W/835/A/4P/ALTO

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

Warnings and Safety

• Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Product data


General Information			
Base	GX24Q-3 [GX24q-3]	LLMF 4000 h Rated	88 %
LSF Preheat 2000 h Rated	99 %	LLMF 6000 h Rated	85 %
LSF Preheat 4000 h Rated	98 %	LLMF 8000 h Rated	84 %
LSF Preheat 6000 h Rated	97 %	LLMF 12000 h Rated	81 %
LSF Preheat 8000 h Rated	90 %	Operating and Electrical	
Light Technical		Power (Rated) (Nom)	27.0 W
Color Code	835 [CCT of 3500K]	Lamp Current (Nom)	0.335 A
Initial lumen (Nom)	1750 lm	Temperature	
Luminous Flux (Rated) (Nom)	1750 lm	Design Temperature (Nom)	28 °C
Color Designation	White (WH)	Controls and Dimming	
Correlated Color Temperature (Nom)	3500 K	Dimmable	Yes
Luminous Efficacy (rated) (Nom)	64.8 lm/W		
Color Rendering Index (Nom)	82		
LLMF 2000 h Rated	92 %		

PL-T Triple 4-Pin Base

Mechanical and Housing	
Cap-Base Information	4P
Approval and Application	
Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	1.4 mg
Product Data	
Order product name	PL-T 26W/835/A/4P/ALTO

EAN/UPC - Product	046677268244
Order code	458265
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927910983550
Net Weight (Piece)	64.000 g
ILCOS Code	FSM-26/35/1B-E-GX24q=3

Dimensional drawing




PL-T ALTO 26W/835/4P A

Product	D (max)	A (max)	B (max)	C (max)
PL-T 26W/835/A/4P/ALTO	41 mm	86.7 mm	111.0 mm	126.7 mm

Photometric data

LDPO


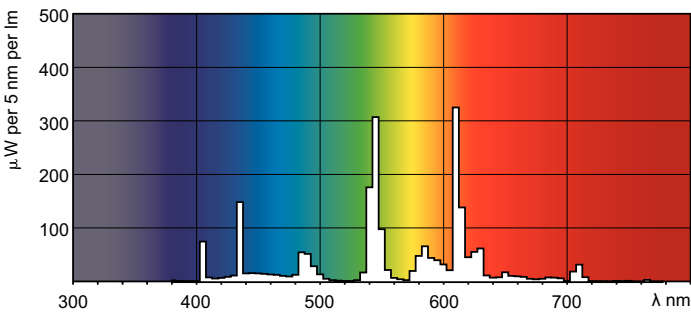


LDPB_PLTTOP4P_835-Spectral power distribution B/W

LDPO_PLTTOP4P_835-Spectral power distribution Colour


PL-T Triple 4-Pin Base

Lifetime

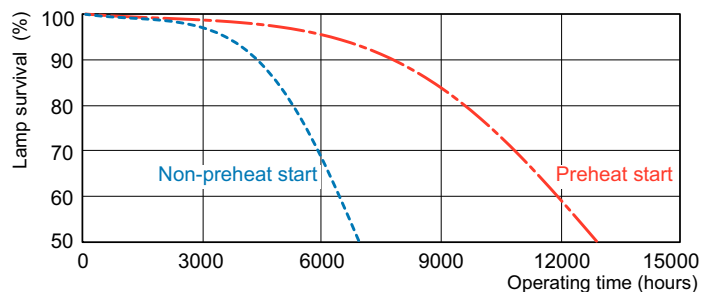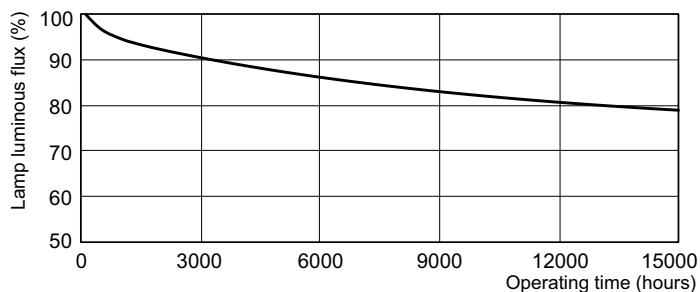

LDLM_PLTTOP4P_0001-Lumen maintenance diagram

LDLE_PLTTOP4P_0001-Life expectancy diagram

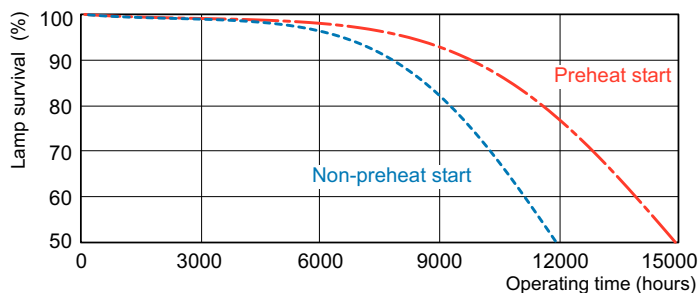

LDLE_PLTTOP4P_0002-Life expectancy diagram

