



# **LED G25**

## 4.5G25/VIN/820/E26/CL/GL/DIM 4/1BC T20

Philips G25 LED Lamps offer energy saving ambience with an elegant effect. Their unique design provides light in all directions, giving lighting designers a long life alternative to standard incandescent sources.


### Product data

General Information	
Base	E26 [ Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X
Technical Type	4.5-40W
Light Technical	
Color Code	820 [ CCT of 2000K]
Initial lumen (Nom)	300 lm
Color Designation	Flame
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	66.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	4.5 W
Lamp Current (Nom)	40 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s

0.7
120 V
50 °C
Yes
Amber
Not applicable
- kWh
4.5G25/VIN/820/E26/CL/GL/DIM 4/1BC T20
046677537586
537589
1
4
929001951253
0.040 kg

Datasheet, 2020, November 30 data subject to change


### Dimensional drawing




Bulb G25 4.5-40W 300lm 2000K E26 D Amber

# Product D C 4.5G25/VIN/820/E26/CL/GL/DIM 4/1BC T20 80 mm 119 mm


#### Photometric data



LEDbulb 4,5W G25 E26 820 Amber




LEDbulb G25 4,5W E26 820 Amber

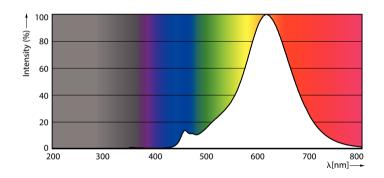


LEDbulb 4,5W G25 E26 820 Amber

### **LED G25**

#### Lifetime

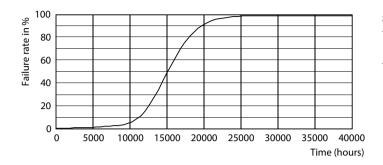

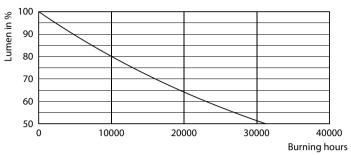

15K LED 15K LMP



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.