



# LED BR30

## 7.2BR30/PER/940/P/E26/DIM 6/1FB T20

Philips BR30 LED lamps are the smart alternative to standard incandescent. The traditional lamp design can provide excellent dimming performance with spectacular energy savings. They provide the beautiful light and dependable performance you expect from LED at an economical price.

### Product data

| General Information                   |                                    |
|---------------------------------------|------------------------------------|
| Base                                  | E26 [ Single Contact Medium Screw] |
| EU RoHS compliant                     | Yes                                |
| Nominal Lifetime (Nom)                | 15000 h                            |
| Switching Cycle                       | 50000X                             |
| Technical Type                        | 7.2-65W                            |
| Light Technical                       |                                    |
| Color Code                            | 940 [ CCT of 4000K]                |
| Beam Angle (Nom)                      | 90 °                               |
| Initial lumen (Nom)                   | 650 lm                             |
| Color Designation                     | Cool White (CW)                    |
| Correlated Color Temperature (Nom)    | 4000 K                             |
| Luminous Efficacy (rated) (Nom)       | 90.00 lm/W                         |
| Color Consistency                     | <4                                 |
| Color Rendering Index (Nom)           | 90                                 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 %                               |
| Operating and Electrical              |                                    |
| Input Frequency                       | 60 Hz                              |
| Power (Rated) (Nom)                   | 7.2 W                              |
| Lamp Current (Nom)                    | 82 mA                              |
| Wattage Equivalent                    | 65 W                               |

| Starting Time (Nom)             | 0.5 s                               |
|---------------------------------|-------------------------------------|
| Warm Up Time to 60% Light (Nom) | 0.5 s                               |
| Power Factor (Nom)              | 0.7                                 |
| Voltage (Nom)                   | 120 V                               |
| Temperature                     |                                     |
| T-Case Maximum (Nom)            | 75 °C                               |
| Controls and Dimming            |                                     |
| Dimmable                        | Yes                                 |
| Mechanical and Housing          |                                     |
| Bulb Finish                     | Frosted                             |
| Approval and Application        |                                     |
| Energy Efficiency Label (EEL)   | Not applicable                      |
| Energy Consumption kWh/1000 h   | - kWh                               |
| Product Data                    |                                     |
| Order product name              | 7.2BR30/PER/940/P/E26/DIM 6/1FB T20 |
| EAN/UPC - Product               | 046677545918                        |
| Order code                      | 545913                              |
| Numerator - Quantity Per Pack   | 1                                   |

LED BR30

|                                 |              |
|---------------------------------|--------------|
| Numerator - Packs per outer box | 6            |
| Material Nr. (12NC)             | 929002032204 |
| Net Weight (Piece)              | 0.095 kg     |



Dimensional drawing

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

| Product                             | D     | C      |
|-------------------------------------|-------|--------|
| 7.2BR30/PER/940/P/E26/DIM 6/1FB T20 | 95 mm | 132 mm |


BR30 120V 7.2-65W 650lm 4000K E26 D

Photometric data



LEDBulbs\_BR30 120V 72-65W 650lm 3000K E26 D



LEDBulbs\_BR30 120V 72-65W 650lm 4000K E26 D

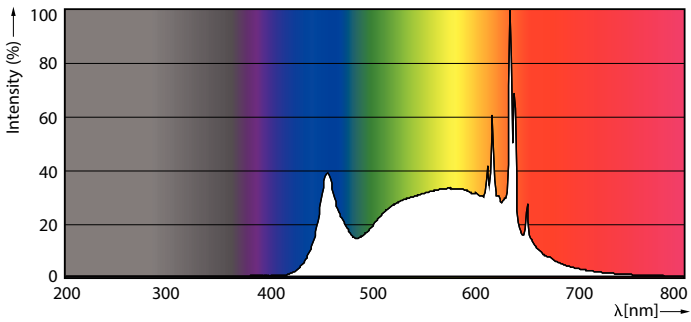

LEDBulbs\_BR30 120V 72-65W 650lm 4000K E26 D

LED BR30

Lifetime

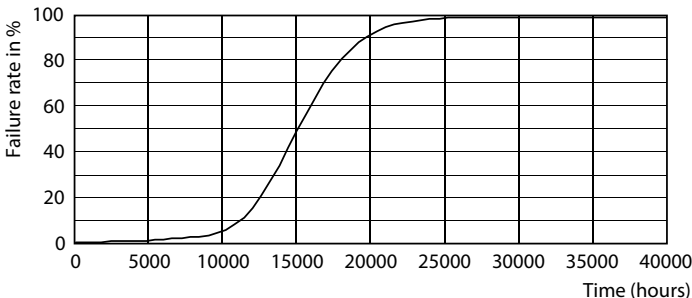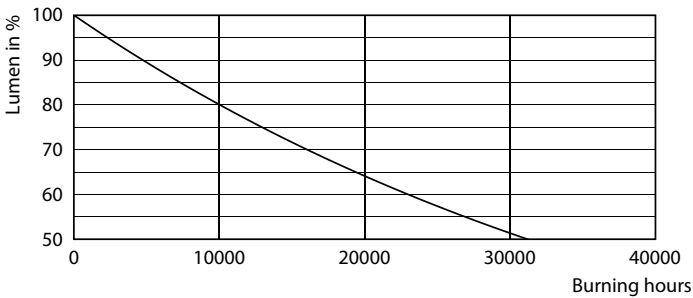

LEDBulbs BR30 120V 19-120W 1200lm 2700K E26 D

LEDBulbs BR30 120V 19-120W 1200lm 2700K E26 D

