



5PL-S/LED/13H/827/IF5/P/2P 20/1

Philips LED PL-S lamps make the transition to LED from CFL lamps as simple as replacing a lamp. The InstantFit (UL Type A) 2-pin PL-S LED lamps are available in a wide array of color temperatures. They quickly and effectively replace 13W 2-pin compact fluorescent PL-S lamps.

Product data

General Information				
Base	GX23 [GX23]			
EU RoHS compliant	Yes			
Nominal Lifetime (Nom)	50000 h			
Switching Cycle	50000X			
Light Technical				
Color Code	827 [CCT of 2700K]			
Beam Angle (Nom)	120 °			
Initial lumen (Nom)	520 lm			
Color Designation	Warm White (WW)			
Correlated Color Temperature (Nom)	2700 K			
Luminous Efficacy (rated) (Nom)	104.00 lm/W			
Color Consistency	<6			
Color Rendering Index (Nom)	82			
LLMF At End Of Nominal Lifetime (Nom)	70 %			
Operating and Electrical				
Input Frequency	50 to 60 Hz			
Power (Rated) (Nom)	5 W			
Lamp Current (Max)	50 mA			
Lamp Current (Min)	15 mA			
Starting Time (Nom)	0.5 s			


Warm Up Time to 60% Light (Nom)	0.5 s			
UL Type	Type A - works on ballast			
Power Factor (Nom)	0.9			
Voltage (Nom)	120-277 V			
Temperature				
T-Ambient (Max)	45 °C			
T-Ambient (Min)	-20 °C			
T-Storage (Max)	65 °C			
T-Storage (Min)	-40 °C			
T-Case Maximum (Nom)	75 ℃			
Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Product Length	6.7 in			
Approval and Application				
Energy Efficiency Label (EEL)	Not applicable			
Energy Saving Product	Yes			
Approbation Marks	UL certificate RoHS compliance			

Datasheet, 2021, February 28 data subject to change

Energy Consumption kWh/1000 h	- kWh			
Product Data				
Order product name	5PL-S/LED/13H/827/IF5/P/2P 20/1			
EAN/UPC - Product	046677529512			
Order code	529511			
Numerator - Quantity Per Pack	1			

Numerator - Packs per outer box	20		
Material Nr. (12NC)	929001862804		
Net Weight (Piece)	0.043 kg		
Model Number	9290018628		


Dimensional drawing




PLED PLS 120-277V 5-13W 580lm 2700K GX23


Product	D	D1	A1	A2	A3
5PL-S/LED/13H/827/IF5/P/2P	31.1 mm	15.8 mm	108 mm	144 mm	166 mm
20/1					

Photometric data

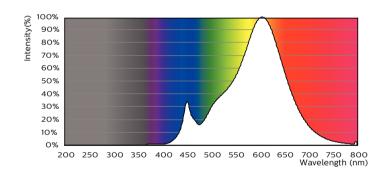




LEDtube PLS 5W GX23 827 2P 12D ND




LEDtube PLS 5W GX23 827 2P 12D ND


LEDtube PLS 5W GX23 827 2P 12D ND

Lifetime

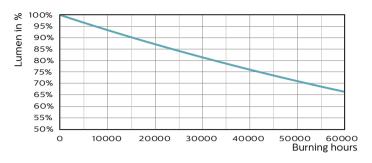





LEDtube PLS 5W GX23 827 2P 12D ND

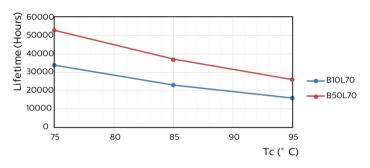

LEDtube PLS 5W GX23 827 2P 12D ND



LEDtube PLS 5W GX23 827 2P 12D ND

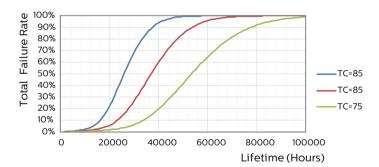

LEDtube PLS 5W GX23 827 2P 12D ND

3

LEDtube PLS 5W GX23 827 2P 12D ND

