

LED B11

5.5B11/PER/927-922/CL/G/E12/WGX 1FB T20

Philips LED B11 candles offer energy saving ambiance with the elegant effect of incandescent candles. These designs provides light in an omnidirectional manner, giving lighting designers a long life alternative to standard incandescent sources.


Product data

General Information	
Base	E12 [Candelabra Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X
Technical Type	5.5-60W
Light Technical	
Color Code	927-922 [CCT of 2700K-2200K]
Initial lumen (Nom)	500 lm
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	- K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	5.5 W
Lamp Current (Nom)	60 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s

Power Factor (Nom)		0.75
Voltage (Nom)		120 V
Temperature		
T-Case Maximum (Nom)		60 °C
Controls and Dimming		
Dimmable		Yes
Mechanical and Housing		
Bulb Finish		Clear
Approval and Application		
Energy Efficiency Label (EEL)		Not applicable
Energy Consumption kWh/1000 h		- kWh
Product Data		
Order product name		5.5B11/PER/927-922/CL/G/E12/WGX 1FB T20
EAN/UPC - Product		046677549336
Order code		549337
Numerator - Quantity Per Pack		1
Numerator - Packs per outer box		10
Material Nr. (12NC)		929002204504
Net Weight (Piece)		0.020 kg

LED B11


Dimensional drawing




CandlB11120V5.5-60W500lm2700-2200KE12DCL

Product	D	C
5.5B11/PER/927-922/CL/G/E12/WGX 1FB T20	35 mm	100 mm


Photometric data



LEDbulb E12 E26 BA11 B11 927 CL-LDD

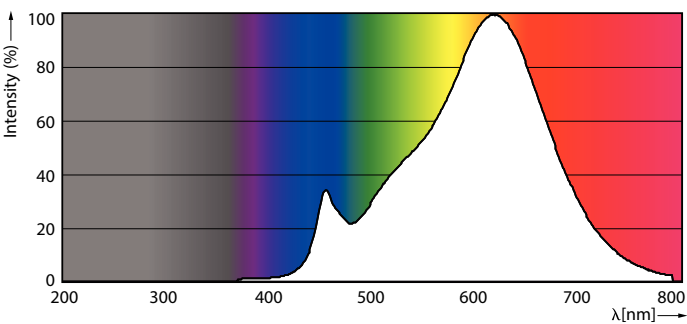


LEDbulb 927 CL-POC




LEDbulb 5.5W E12 B11 927 CL

LED B11

Lifetime

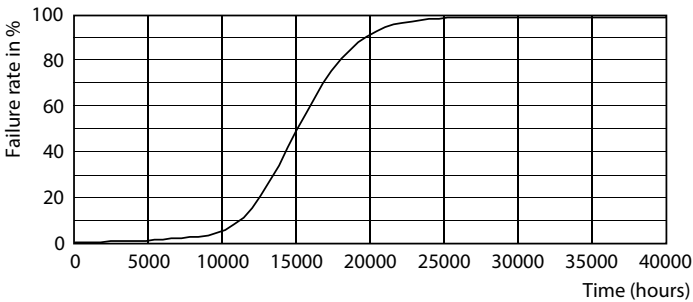

15K LED

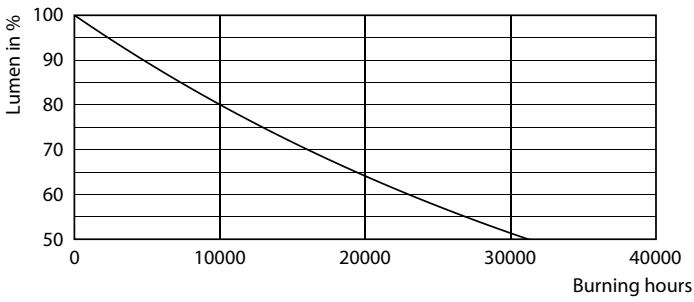

15K LMP

