



Versatile wall and ceiling fixture in 13 and 26 Watt fluorescent. Housing is die cast aluminum bronze finish with clear vandalproof polycarbonate refractor. Photocell & sensor models available. Lamp supplied.

Color: White

Weight: 4.9 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

| | |
|-------------|--------------|
| Type | 2 - 13W Twin |
| Watts | 26W |
| Shape/Size | N/A |
| Base | N/A |
| ANSI | N/A |
| Hours | 10,000 |
| Lamp Lumens | 1,800 |
| Efficacy | 47.4 lm/W |

Ballast Info

| | |
|-------------|----------|
| Type | NPF 277V |
| 120V | N/A |
| 208V | N/A |
| 240V | N/A |
| 277V | 0.2A |
| Input Watts | 38W |

Technical Specifications

Electrical

THD:

4.7% at 120V, 13.8% at 277V

Photocell:

277V Photocell included. Photocell is compatible with 208V-277V.

Sockets:

HPS Medium base 4kv Pulse Rated Glazed porcelain CFL Plug-in type, thermoplastic

HID Quartz restrike:

Add suffix "/QR" to Van3 (50w restrike) or Van5 (100w restrike) for HOT restrike. Provides immediate illumination in case of momentary power failure.

Compliance

UL Listed:

Suitable for wet locations. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

Optical

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Construction

Housings:

Die-cast aluminum with powder coat bronze or white finish

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER).

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Ballast Minimum Starting Temperature:


32°F

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

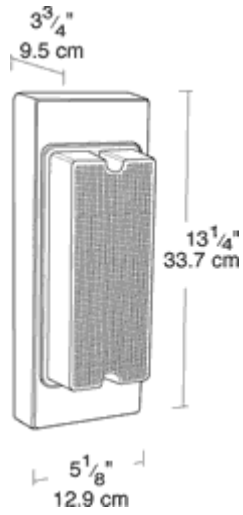

Features

- Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied
- Tough polycarbonate refractor
- Die cast aluminum housings