



Gotcha Sensor with two weatherproof, corrosion-proof floodlights, molded gaskets and corrosion-proof universal cover plate. Lamps not supplied.

Color: White

Weight: 1.8 lbs

Project:

Type:

Prepared By:

Date:

## Technical Specifications

### Compliance

#### UL Listed:

Suitable for wet locations

### Electrical

#### Voltage:

120 or 277 volts AC 60 Hz

#### Power Consumption:

4W

#### Surge Protection:

Withstands up to 6000 volts

#### Wall Switch Manual Override:

Two flip logic prevents activation by momentary power outages. Override resets to auto after 6 hours or at dawn. No extra wiring needed.

### Switching Capacity:

500W @ 120VAC Tungsten  
500W @ 277VAC Tungsten  
600W @ 120VAC Electronic Ballast (LED)  
1350W @ 277VAC Electronic Ballast (LED)

### Sensor Specifications

#### Time Adjustment:

10 seconds to 15 minutes

#### Detector Sensitivity:

Adjustable from 100% to 50%

#### Sensor Housing:

Made of tough, corrosion resistant polycarbonate

#### Detection:

110° view

### Construction

#### Floodlights:

Made of tough, corrosion-resistant polycarbonate. For extra or replacement floodlights, order cat# TUFFY in your choice of color. Accepts PAR-38 lamps, medium base, 150 watts max. Lamps not included.

#### Other


#### Warranty:

5-year sensor warranty

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

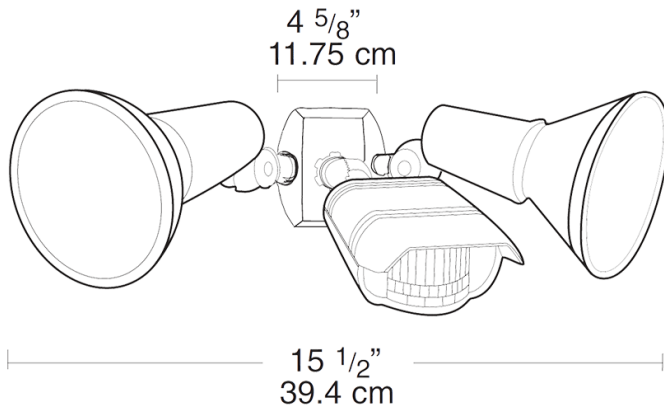

## Features

- 500, 600 & 1350 Watt switching capacity
- New vandal resistant grill
- 6000 volt surge protection
- Temperature compensation
- Protected manual override with auto reset
- Double look down lens
- 5-Year, No-Compromise Warranty