

Project:

Type:

Prepared By:

Date:



UPC: 019813748108



### Features and Benefits

Produces rich and vibrant colors >90CRI  
 Energy efficient replacement for incandescent and halogen lamps  
 Constructed from durable plastic which lowers risk of breakage  
 Rated for use in enclosed and open fixtures in dry or damp locations  
 Frosted lens produces smooth diffuse light  
 Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs  
 ENERGY STAR Compliant, Title 20 Compliant  
 Dimmable with common dimmer types (check compatibility list)

## Technical Specifications

### Performance

#### Product Type:

A-Line

#### Input Wattage:

15W

#### Lumens (Nominal):

1100lm

#### Efficacy:

73 lm/W

#### Color Accuracy (CRI):

90 CRI

#### L70 Lifespan:

25,000 Hours

### Dimmable:

Yes, down to 10%

### Construction

#### Bulb Shape:

A21

#### Base Type:

E26

#### Beam Angle:

230°

#### For Use Outdoors in Open Fixtures:

No

### Other

#### Equivalency:

75W Incandescent

### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of four (4) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

### LED Characteristics

#### Color Temperature:

5000K Daylight

### Electrical

#### Power Factor:

0.9

#### Operating Temperature:

-20°C - 45°C

#### Input Voltage:

120V

Technical Specifications (continued)

Electrical

Operating Frequency:

60 Hz

Electrical Characteristics

Flicker:

<30%

Compliance

UL Listed:

Yes

ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star ID:

2330073


CEC Status:

Lawful for sale in California

Case and Pallet Dimensions

|        | QTY  | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|------|-------------|------------|-------------|
| CASE   | 12   | 13.6        | 10.3       | 6.2         |
| PALLET | 2160 | 41.1        | 34.2       | 49.8        |

Dimension

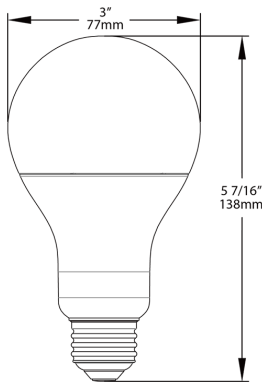

Light Distribution

